


2.92mm Female Connector Solder/Non-Solder Contact

Attachment 4 Hole Flange Mount for RG405, PE-SR405FL_{0.55}

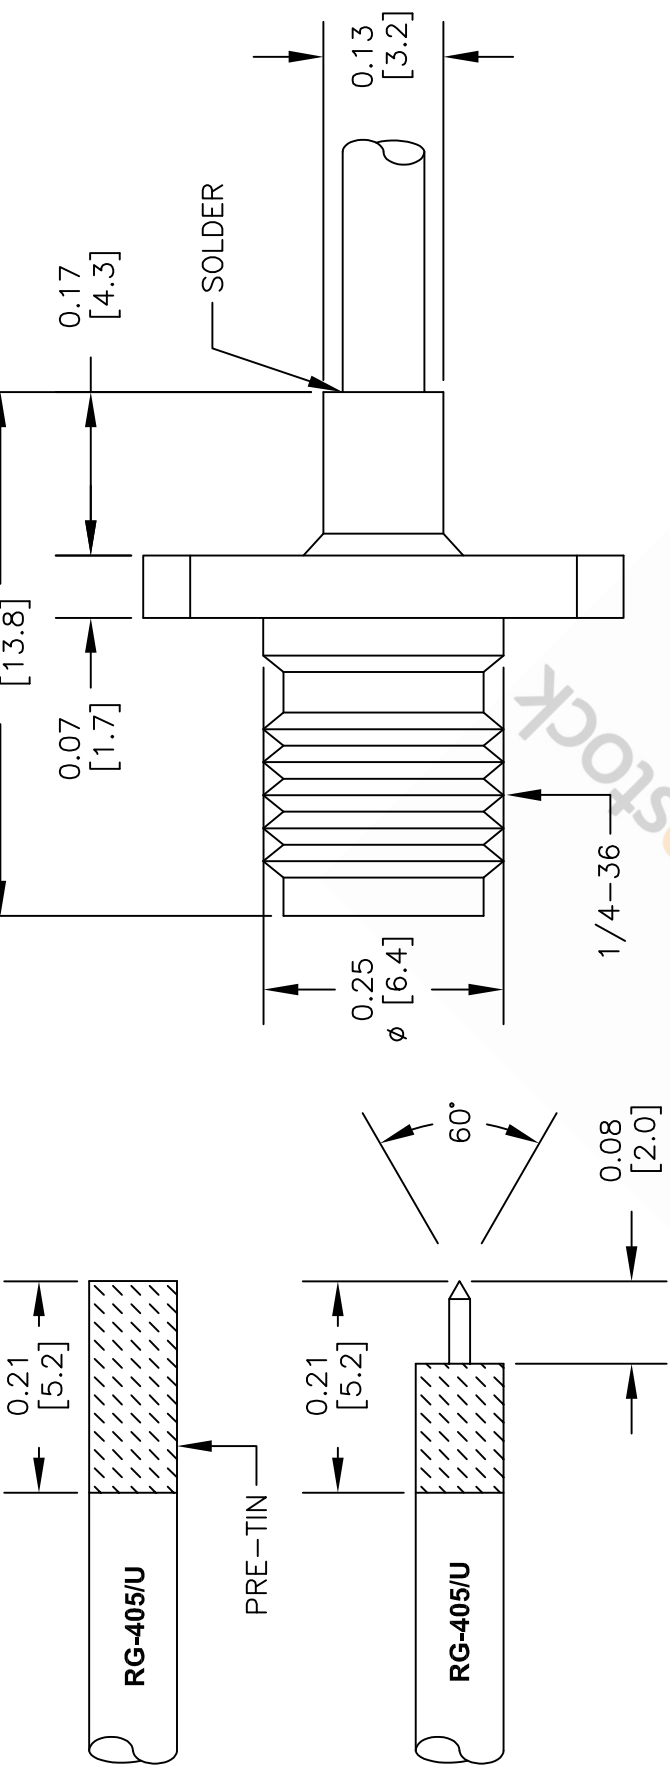

STRIPPING DIMENSIONS

ASSEMBLY PROCEDURES

1. PRE-TIN CABLE JACKET TO SHOW THE APPROXIMATE LENGTH SHOWN
2. TRIM CABLE JACKET & DIELECTRIC TO EXPOSE CENTER CONDUCTOR FOR A LENGTH OF .08±0.01 (DO NOT NICK CENTER CONDUCTOR)
3. POINT CENTER CONDUCTOR AS SHOWN
4. HEAT CONNECTOR BODY BACK END AND INSERT TINNED CABLE INTO CONNECTOR BODY UNTIL PLUGGED-IN AND FULLY SEATED.
5. FLOW ADDITIONAL SOLDER WHERE INDICATED IF NECESSARY.

DWG TITLE

ET9908

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].
 4. FITS MIL-C-17 AND EQUIVALENT CABLES.

ebeestock
 8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5, HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA
 WEBSITE: www.ebeestock.com
 EMAIL: sales@ebeestock.com

FSCM NO. 53919

CAD FILE 102413

SCALE N/A

SIZE A

150