

## 75 Ohm F Male Connector Twist Attachment for RG6



## ASSEMBLY PROCEDURES

- 1. STRIP CABLE AS SHOWN.
- 2. SCREW CONNECTOR ONTO CABLE UNTIL DIELECTRIC IS FLUSH WITH BODY SHOULDER.



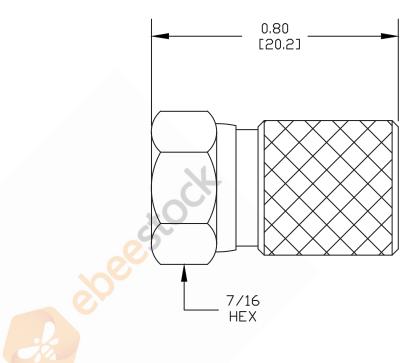

8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5, HUMEN,523900,DONGGUAN, GUANGDONG, CHINA

> WEBSITE: www.ebeestock.com EMAIL: sales@ebeestock.com

DWG TITLE ET10537	NOTES:  1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIM  3. DIMENSIONS ARE IN INCHES [mm].  4. FITS MIL-C-17 AND EQUIVALENT CABLES.		ANY TIME.	
FSCM NO. 53919	CAD FILE 012413-A	SCALE N/A	SIZE A	2231