

N Male Connector Clamp/Solder Attachment for ET38331, ET3833

0, ET38329, ET38378, ET38378-DB, ET38378-UF, 0.400 inch



RF Connectors Technical Data Sheet ET10843

Configuration

- N Male Connector
- MIL-STD-348
- 50 Ohms
- Straight Body Geometry

- ET38331, ET38330, ET38329, ET38378, ET38378-DB, ET38375, 0.400 inch Interface Type
- Clamp/Solder Attachment

Features

Gold Plated Brass Contact

Contact plating according to ASTM-B488

Applications

General Purpose Test

Custom Cable Assemblies

Description

Ebeestock's ET10843 type N male connector with clamp/solder attachment for ET38331, ET38330, ET38329, ET38378, LMR- 400-DB, ET38375 and 0.400 inch is part of our full line of RF components available for same-day shipping.

Our type N male connector ET10843 datasheet specifications and drawing with dimensions are shown below in this PDF. Ebeestock's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Ebeestock has the right connector for the job. Ebeestock can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Operating Voltage (AC)			1,000	Vrms
Dielectric Withstanding Voltage (AC)			2,500	Vrms

Mechanical Specifications

Size

 Length
 1.5 in [38.1 mm]

 Width/Dia.
 0.8 in [20.32 mm]

 Weight
 0.123 lbs [55.79 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Male Connector Clamp/Solder Attachment for ET38331, ET38330, ET38329, ET38378, ET38376, ET38375, 0.400 inch ET10843

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



N Male Connector Clamp/Solder Attachment for ET38331, ET3833

0, ET38329, ET38378, ET38378-DB, ET38378-UF, 0.400 inch



RF Connectors Technical Data Sheet ET10843

Material Specifications

Description	Material	Plating
Contact	Brass	Gold ASTM-B488
Insulation	PTFE	
Body	Brass	Nickel ASTM-B689
Coupling Nut	Brass	Nickel ASTM-B689

Environmental Specifications

Temperature

Operating Range

-65 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

N Male Connector Clamp/Solder Attachment for ET38331, ET38330, ET38329, ET38378, ET38376, ET38375, 0.400 inch from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Male Connector Clamp/Solder Attachment for ET38331, ET38330, ET38329, ET38378, LMR-400-DB, ET38375, 0.400 inch ET10843


URL: https://www.ebeestock.com/n-male-connector-clamp-solder-attachment-for-pe-c400-pe-b400-pe-b405-lmr-400-lmr-400-db-lmr-400-uf-0-400-inch-0010843


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. <a href="Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

ET10843 CAD Drawing

N Male Connector Clamp/Solder Attachment for ET38331, ET38330, ET38329, ET38378, ET38376, ET38375, 0.400 inch



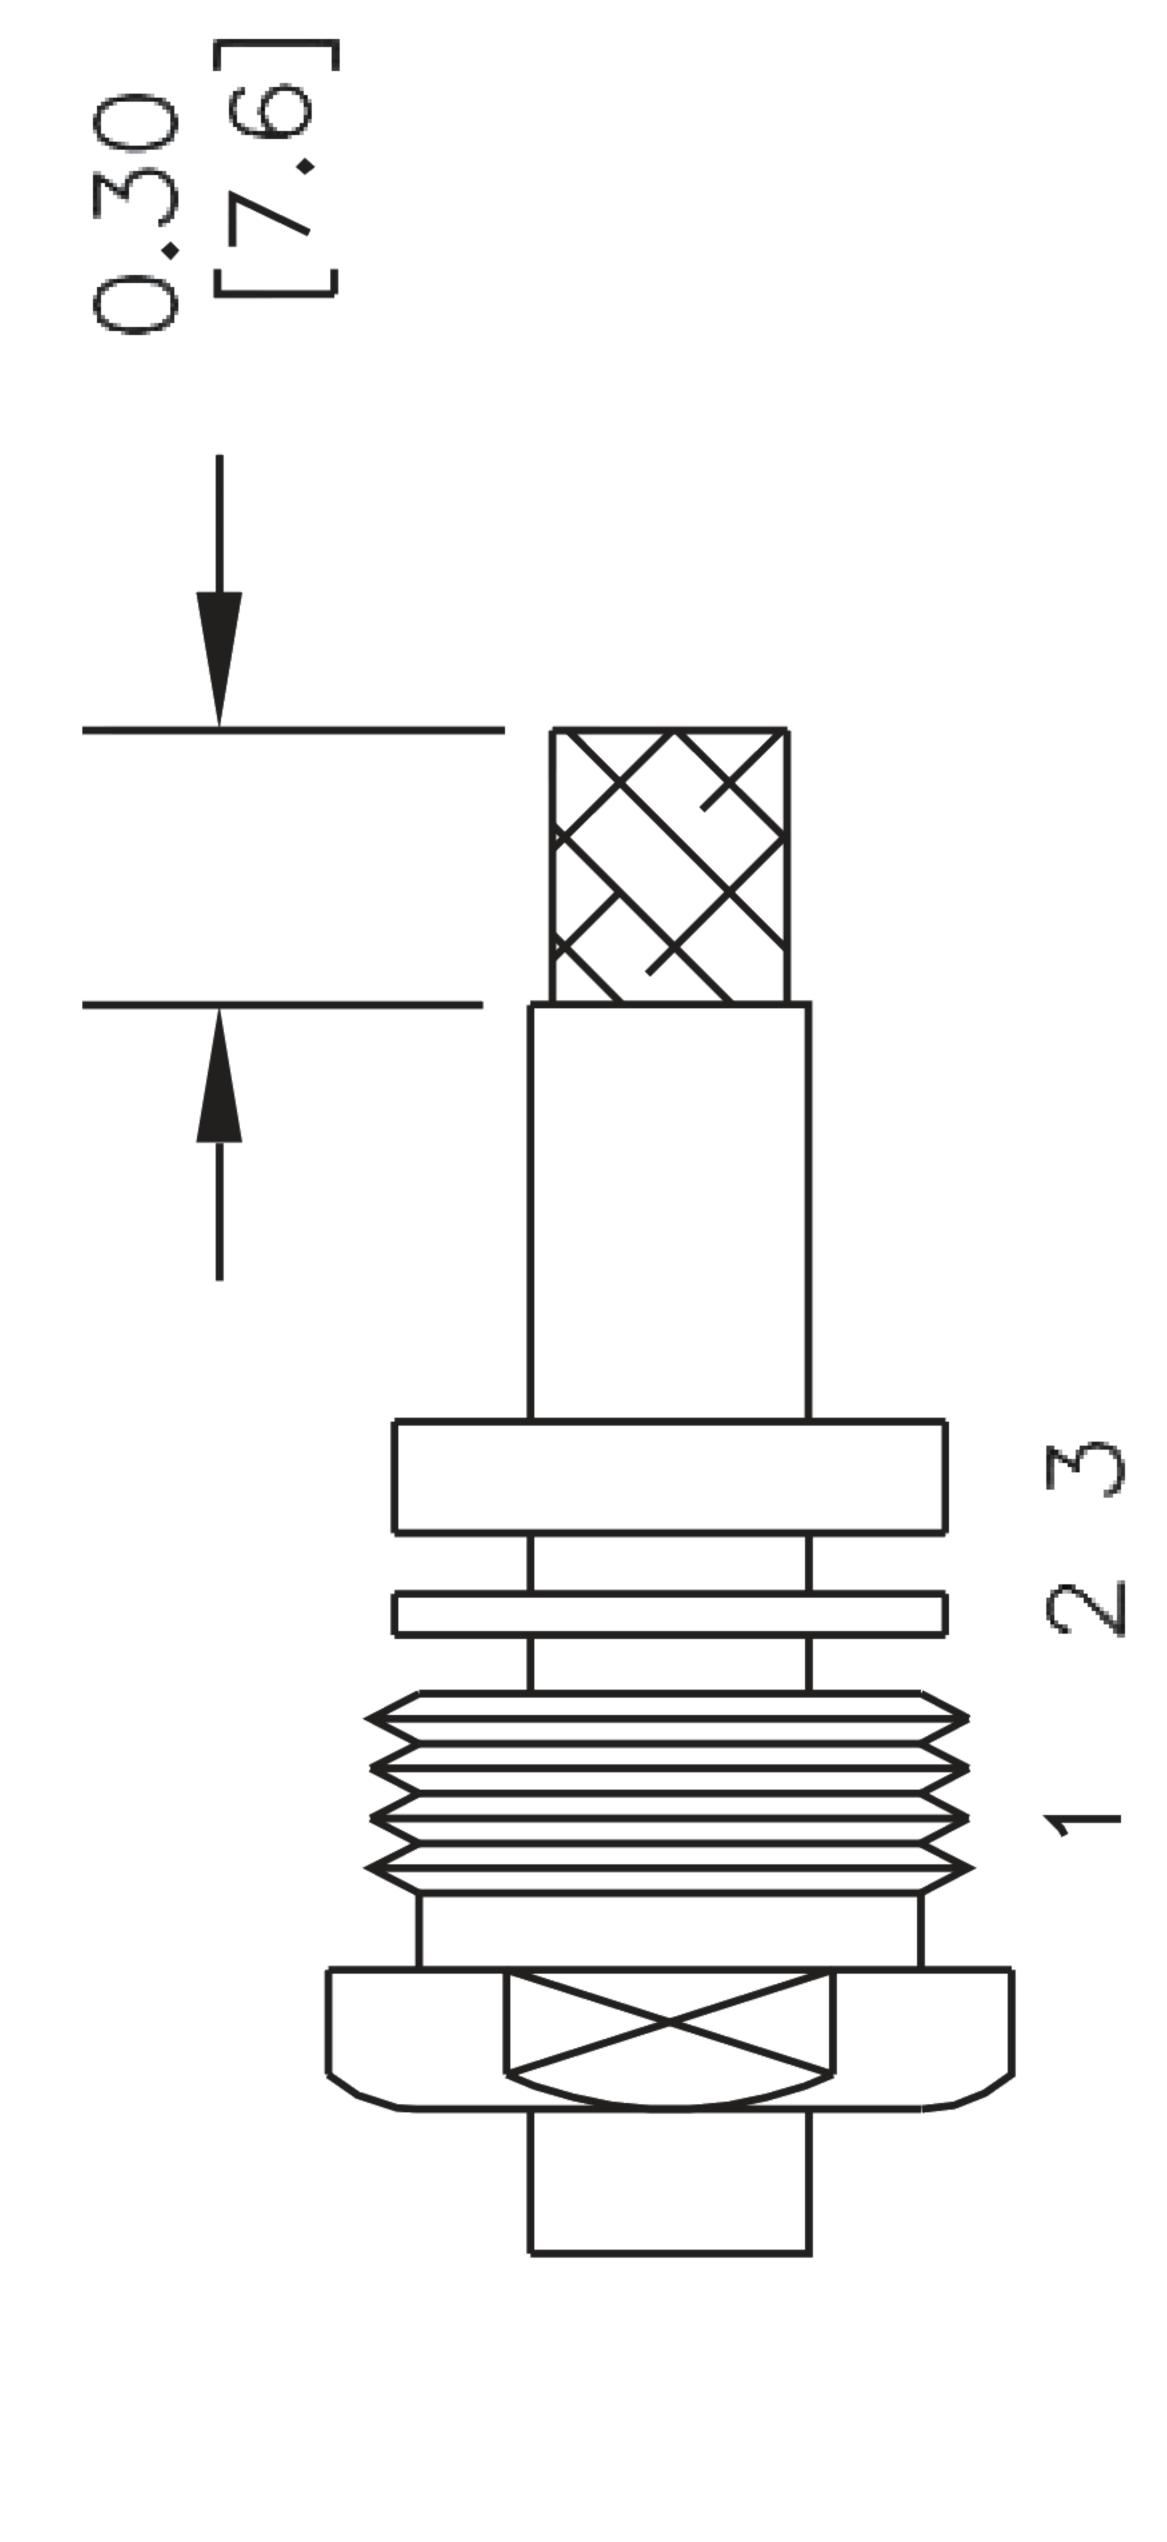

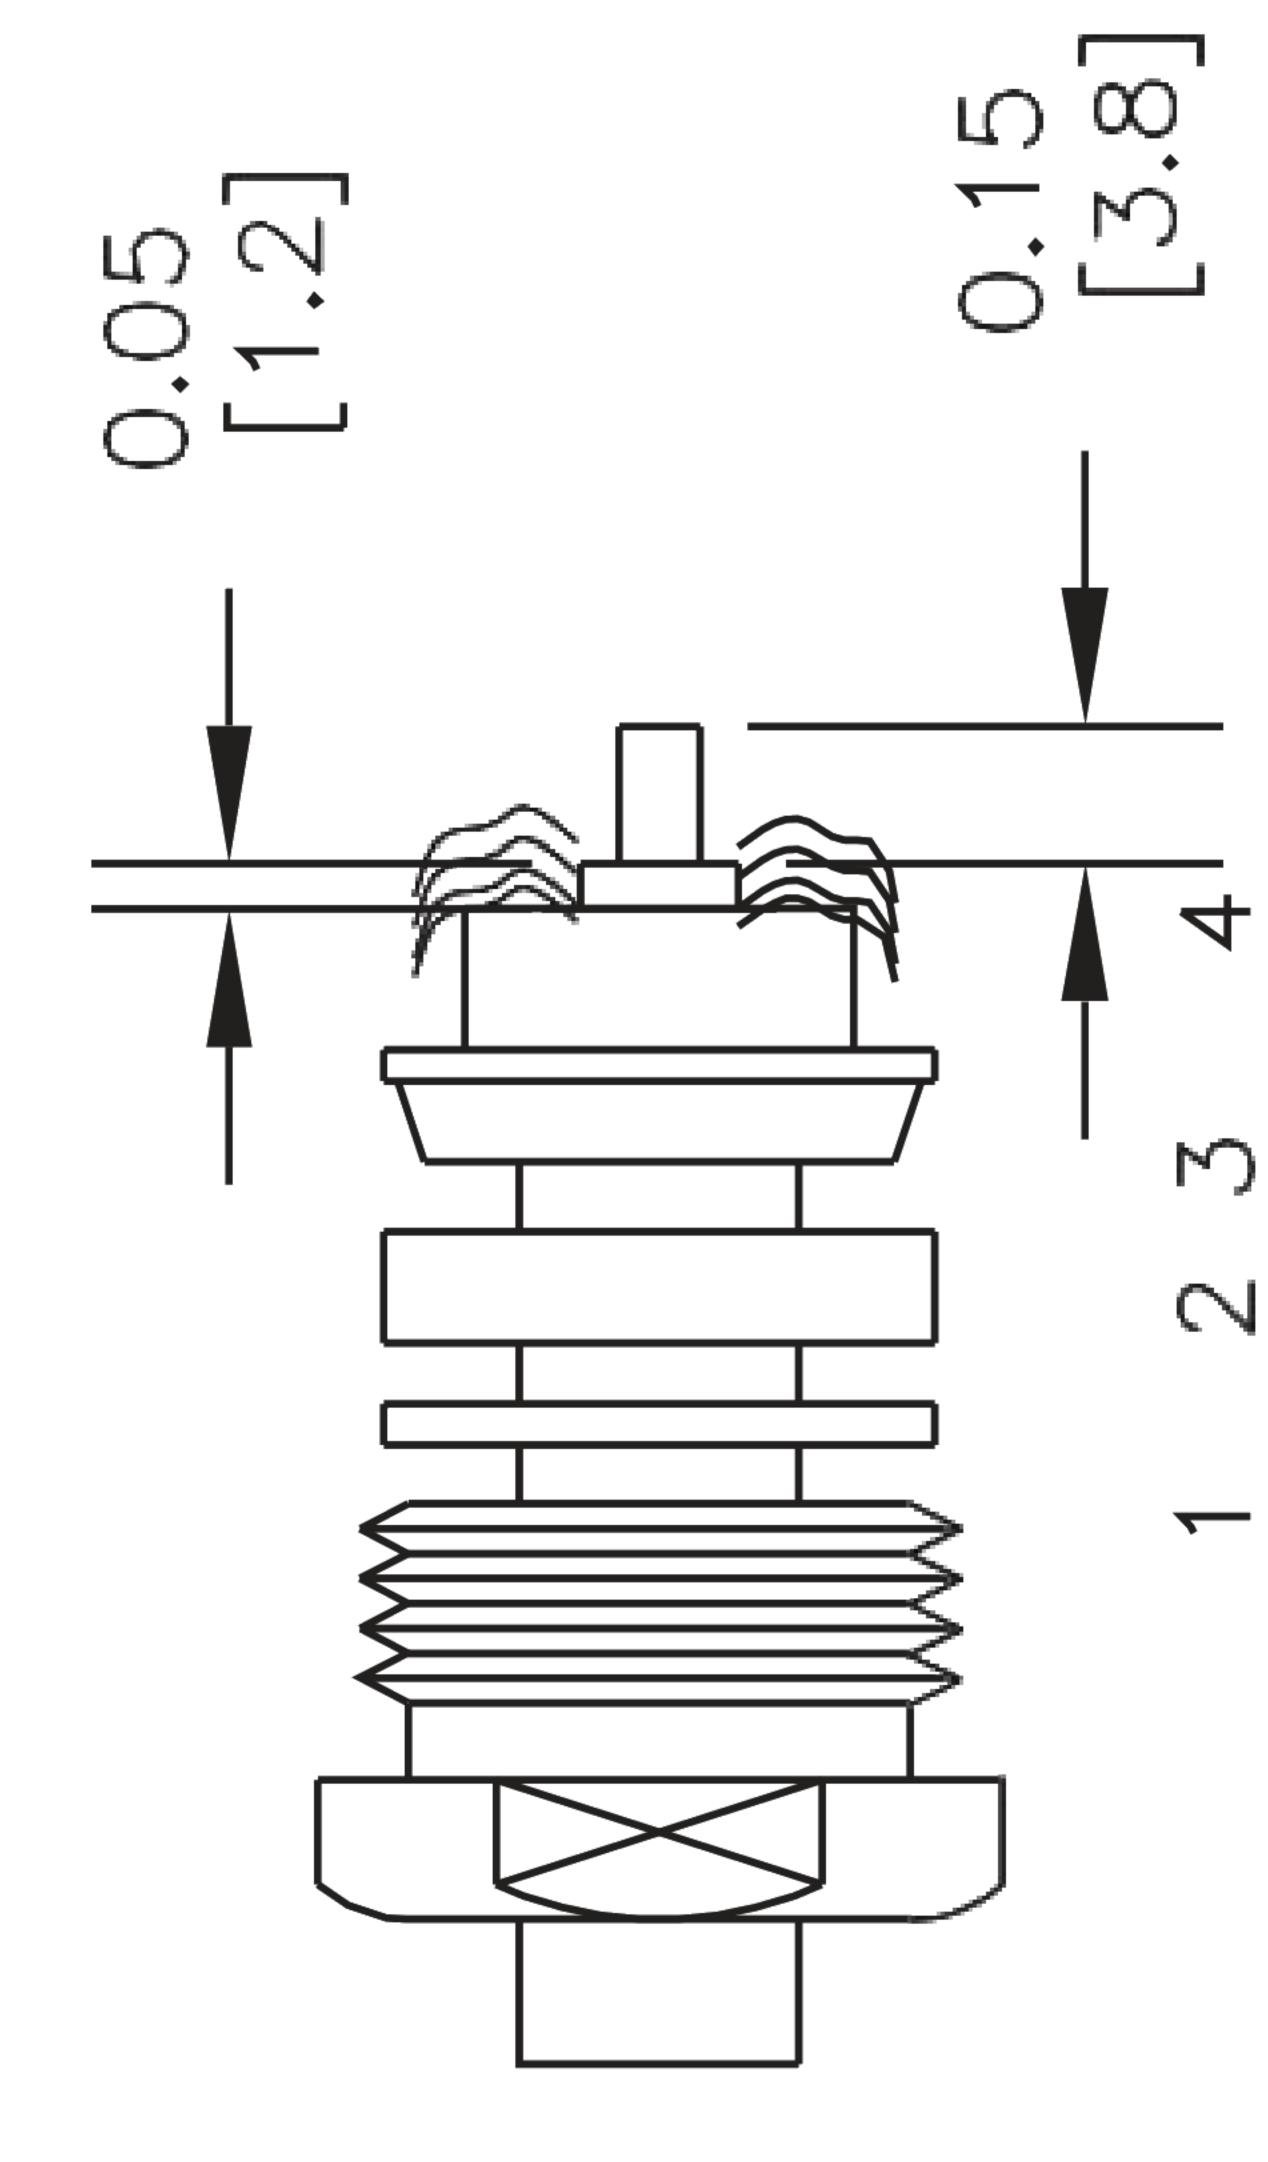

	DWG TITLE	FT10843
2 3 4 0.15	a hoostock	Ebeestock.com

