

SMA Male Right Angle Connector Crimp/Non-Solder Contact Atta chment for ET38379



RF Connectors Technical Data Sheet



Times Microwave Systems Connector Specification Configuration

- SMA Male Connector
- MIL-STD-348
- 50 Ohms

- Right Angle Body Geometry
- Connector Interface Types: ET38379
- 5/16 Inch Hex

Features

- Max. Operating Frequency 6 GHz
- Good VSWR of 1.3:1

- Gold Plated Brass/Phosphor Bronze Contact
- 50 µinch contact plating

Applications

General Purpose Test

Custom Cable Assemblies

Description

Times Microwave's ET11102 SMA male right angle connector offered by Ebeestock with crimp/non-solder contact attachment for Times' ET38379 is part of our full line of RF components available for same-day shipping. Times Microwave's SMA male connector operates up to a maximum frequency of 6 GHz and offers good VSWR of 1.3:1. Its right angle body geometry allows for easier connections in tight spaces.

Times Microwave's SMA male right angle connector ET11102 datasheet specifications and drawing with dimensions are shown below in this PDF. Ebeestock's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Ebeestock has the right connector for the job. Ebeestock can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

| Minimum | Typical | Maximum | Units |
|---------|---------|---------|-----------------------|
| DC | | 6 | GHz |
| | | 1.3:1 | |
| | | 0.25 | dB |
| | | 1,000 | Vrms |
| 5,000 | | | MOhms |
| | DC | DC | DC 6 1.3:1 0.25 1,000 |

Mechanical Specifications

Size

Length 0.725 in [18.42 mm] 0.312 in [7.92 mm] Width/Dia. Height 0.88 in [22.35 mm] Weight 0.021 lbs [9.53 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Male Right Angle Connector Crimp/Non-Solder Contact Attachment for ET38379 EZ-240-SM-RA-X

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.


Webstie:www.ebeestock.com Email:sales@ebeestock.com



SMA Male Right Angle Connector Crimp/Non-Solder Contact Atta chment for ET38379



RF Connectors Technical Data Sheet

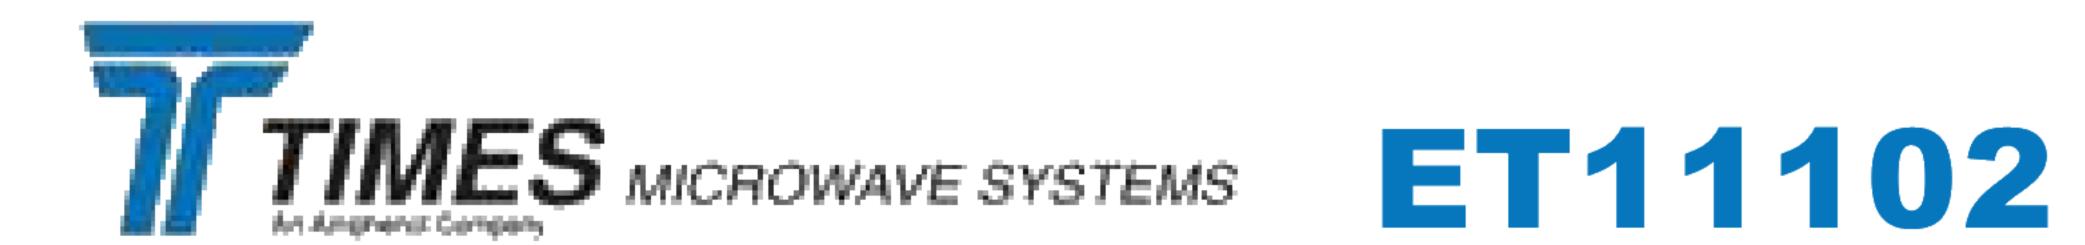

Mating Cycles Mating Torque

500 Cycles 7 to 10 in-lbs [0.79 to 1.13 Nm]

Material Specifications

| Description | Material | Plating |
|--------------|-----------------------|-----------------------|
| Contact | Brass/Phosphor Bronze | Gold 50 µinch |
| Insulation | Teflon | |
| Body | Brass | Tri-Metal 80 µinch |
| Coupling Nut | Brass | Tri-Metal 80 µinch |

Environmental Specifications

Temperature

Operating Range -40 to +125 deg C

MIL-STD 202G, Meth.213, Cond I Shock MIL-STD 202G, Meth.204, Cond D Vibration MIL-STD 202G, Meth. 107, Cond B Thermal Shock

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Male Right Angle Connector Crimp/Non-Solder Contact Attachment for ET38379 EZ-240-SM-RA-X


8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



SMA Male Right Angle Connector Crimp/Non-Solder Contact Atta chment for ET38379



RF Connectors Technical Data Sheet

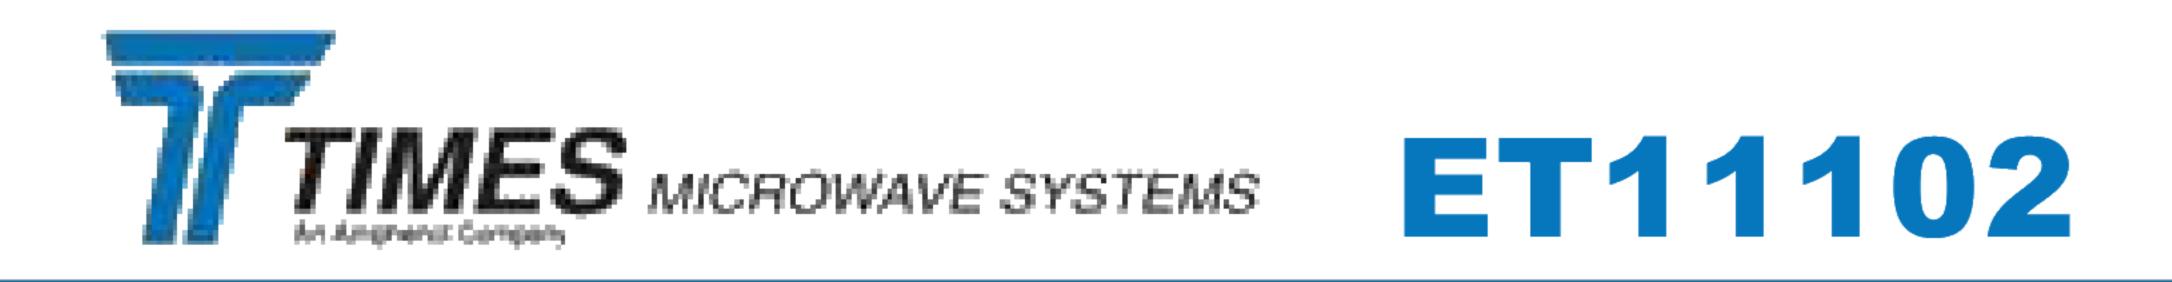

SMA Male Right Angle Connector Crimp/Non-Solder Contact Attachment for ET38379 from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Male Right Angle Connector Crimp/Non-Solder Contact Attachment for ET38379 EZ-240-SM-RA-X

URL: https://www.ebeestock.com/sma-male-right-angle-connector-crimp-non-solder-contact-attachme nt-for-lmr-240-0011102

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen, 523900, Dongguan, Guangdong, China.

