


SMA Male Connector Solder Attachment for ET38338, ET38337, E T38337J, ET38334, ET-RG402

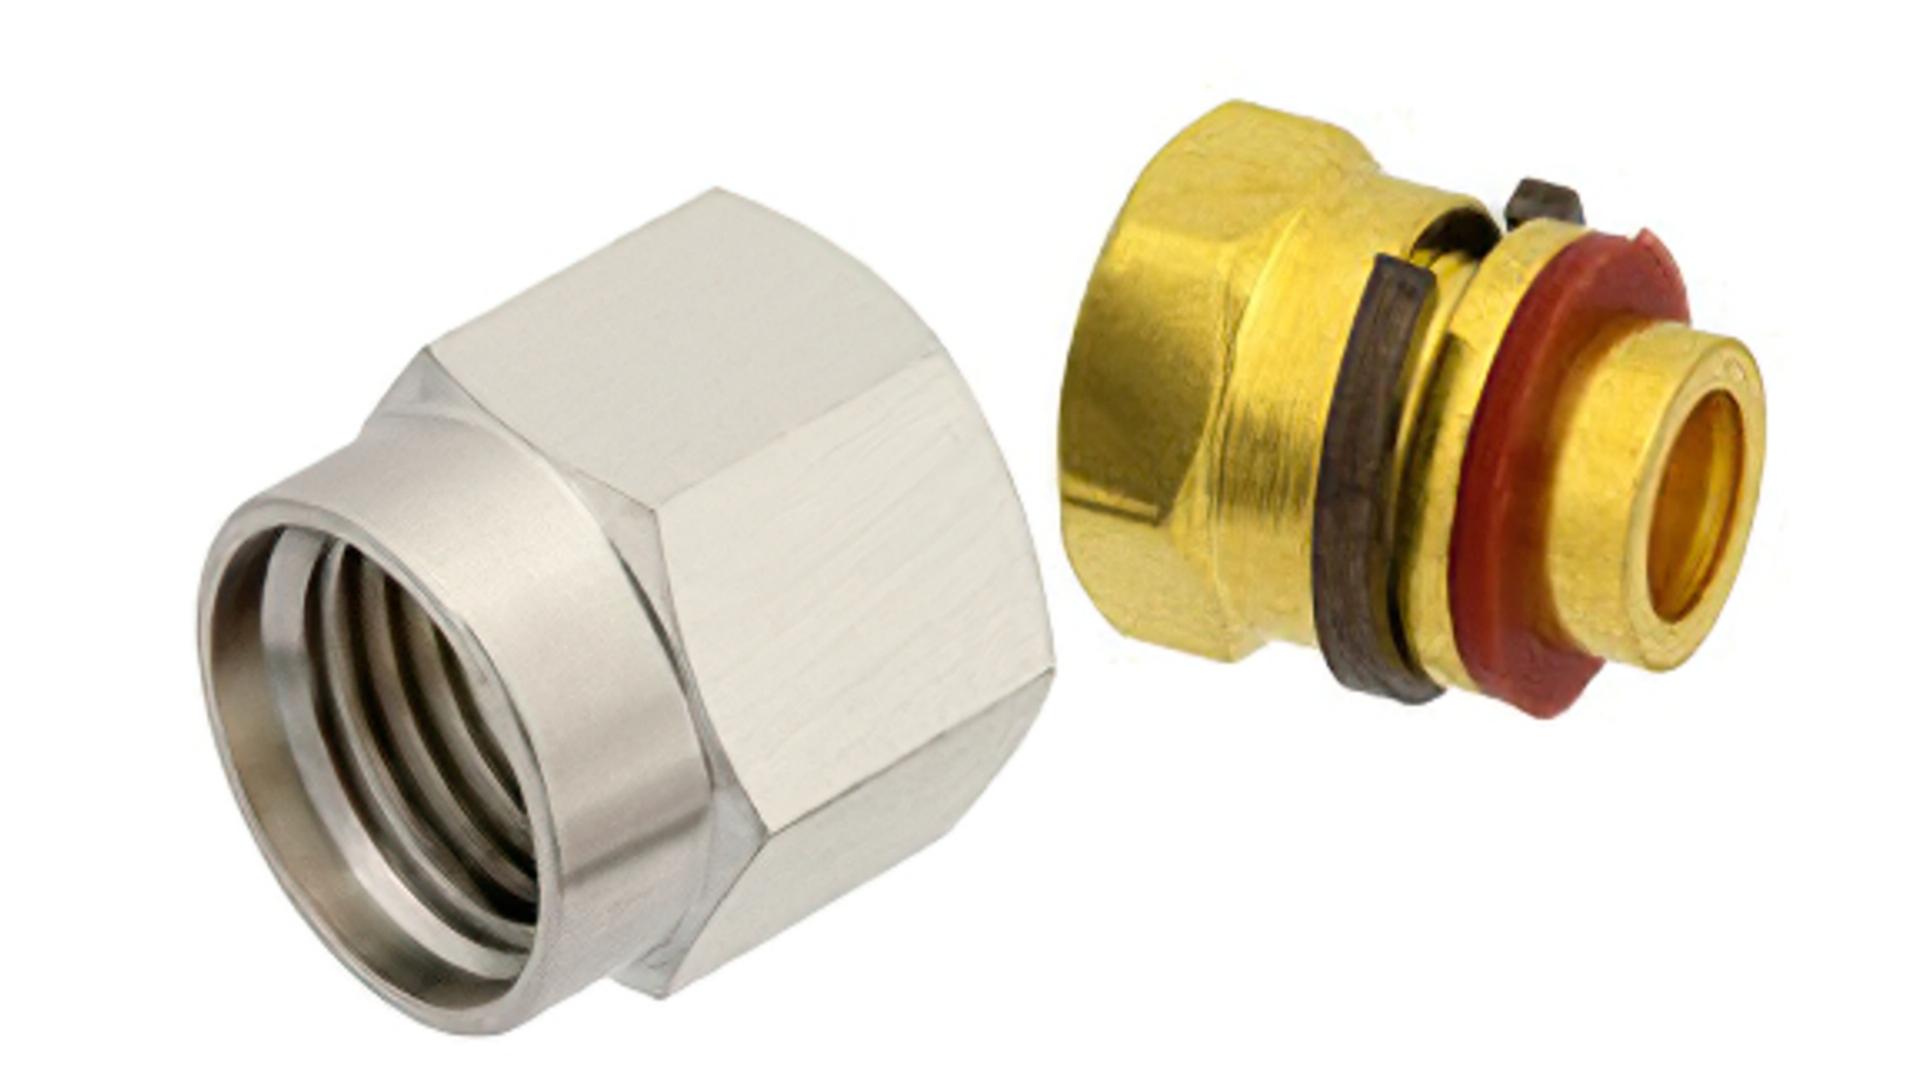

# RF Connectors Technical Data Sheet

# ET11134

# Configuration

- SMA Male Connector
- MIL-STD-348A
- 50 Ohms
- Straight Body Geometry

- Connector Interface Types: ET38338, ET-SR-402FL, ET38335, ET38334, ET-RG402
- 5/16 inch Hex

#### Features

- Max. Operating Frequency 18 GHz
- Excellent VSWR of 1.2:1

- Gold Plated Brass Contact
- 50 µin minimum contact plating

# Applications

General Purpose Test

Custom Cable Assemblies

### Description

Ebeestock's ET11134 SMA male connector with solder/solder attachment for ET38338, ET38337, ET38335, ET38334 and ET-RG402 is part of our full line of RF components available for same-day shipping. Our SMA male connector operates up to a maximum frequency of 18 GHz and offers excellent VSWR of 1.2:1.

Our SMA male connector ET11134 datasheet specifications and drawing with dimensions are shown below in this PDF. Ebeestock's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Ebeestock has the right connector for the job. Ebeestock can also expertly build your custom cable assemblies for you and ship same-day.

# Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
VSWR			1.2:1	
Operating Voltage (AC)			500	Vrms

# Mechanical Specifications

Size

 Length
 0.415 in [10.54 mm]

 Width/Dia.
 0.315 in [8.00 mm]

 Weight
 0.008 lbs [3.63 g]


Mating Torque 3 to 5 in-lbs [0.34 to 0.57 Nm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Male Connector Solder Attachment for ET38338, ET38337, ET38335, ET-SR402TN, ET-RG402 ET11134

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



SMA Male Connector Solder Attachment for ET38338, ET38337, E T38337J, ET38334, ET-RG402

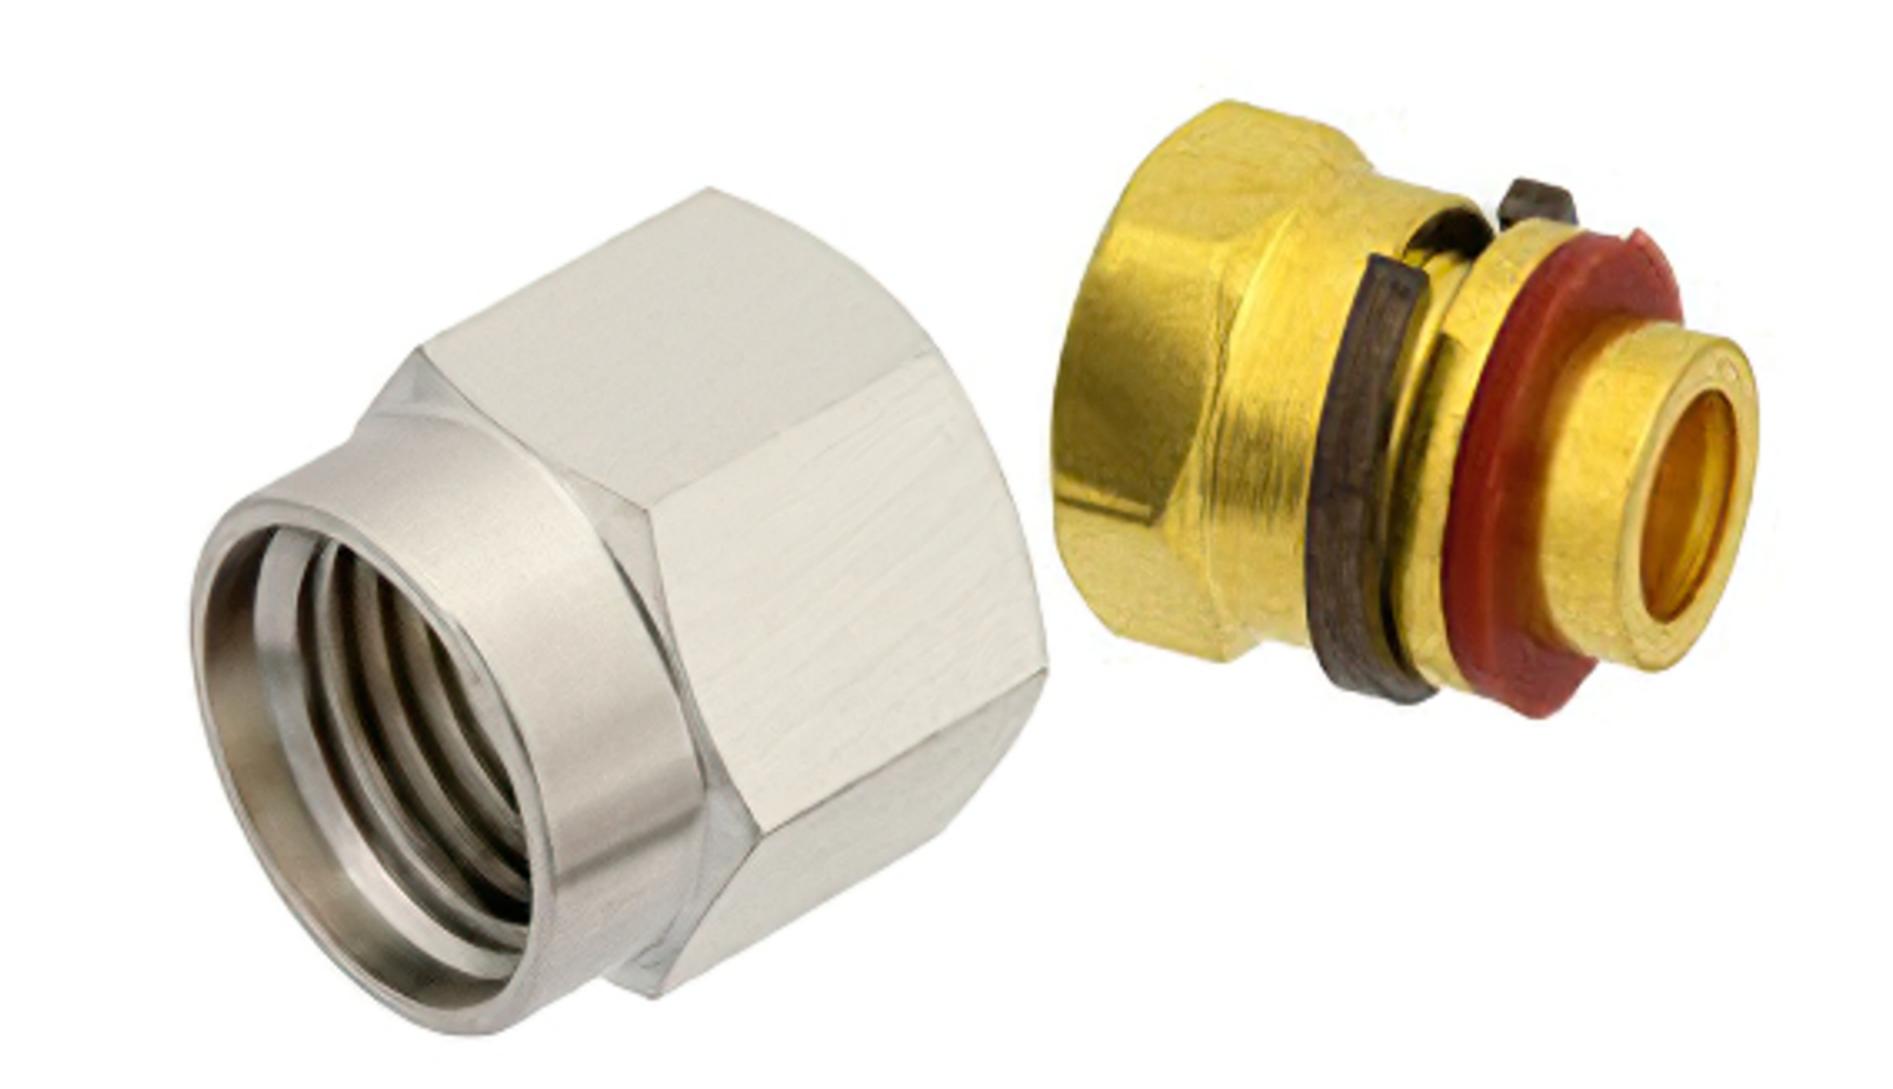

# RF Connectors Technical Data Sheet

# ET11134

#### **Material Specifications**

Description	Material	Plating
Contact	Brass	Gold 50 µin minimum
Insulation	PTFE	
Body	Stainless Steel	Gold 10 µin minimum
Coupling Nut	Brass	Nickel 100 µin minimum

# **Environmental Specifications**Temperature

Operating Range

-65 to +165 deg C

Compliance Certifications (see product page for current document)

#### Plotted and Other Data

Notes:

SMA Male Connector Solder Attachment for ET38338, ET38337, ET38335, ET38334, ET-RG402 from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Male Connector Solder Attachment for ET38338, ET38337, ET38335, ET- SR402TN, ET-RG402 ET11134

**URL:** https://www.ebeestock.com/sma-male-connector-solder-attachment-for-pe-sr402al-pe-sr402fl-pe-sr402fl-pe-sr402tn-rg402-0011134

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

