

SMA Female Connector Solder Attachment 2 Hole Flange Mount f or ET38321, ET38322, ET38322J, ET-RG405, .481 inch Hole Spacing



RF Connectors Technical Data Sheet ET111151

Configuration

- SMA Female Connector
- MIL-STD-348
- 50 Ohms
- Straight Body Geometry

Features

- Max. Operating Frequency 18 GHz
- Excellent VSWR of 1.25:1

- ET38321, ET38322, ET38323, ET-RG405 Interface Type
- Solder/Solder Attachment
- 2 Hole Flange
- Gold Plated Beryllium Copper Contact
- Contact plating according to MIL-G-45204

Applications

General Purpose Test

- Rack and Panel Mount Applications
- Custom Cable Assemblies

Description

Ebeestock's ET11151 SMA female 2 hole flange mount connector with solder/solder attachment for ET38321, ET- SR405FL, ET38323 and ET-RG405 (.481 inch hole spacing) is part of our full line of RF components available for same-day shipping. Our SMA female connector operates up to a maximum frequency of 18 GHz and offers excellent VSWR of 1.25:1. This SMA 2 hole flange connector allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Our SMA female 2 hole flange connector ET11151 datasheet specifications and drawing with dimensions are shown below in this PDF. Ebeestock's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Ebeestock has the right connector for the job. Ebeestock can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

| Minimum | Typical | Maximum | Units |
|---------|---------|---------|------------------------|
| DC | | 18 | GHz |
| | | 1.25:1 | |
| | | 335 | Vrms |
| | | 1,000 | Vrms |
| 5,000 | | | MOhms |
| | DC | DC | DC 18 1.25:1 335 1,000 |

Mechanical Specifications

Size

Length 0.5 in [12.7 mm] Width/Dia. 0.25 in [6.35 mm] Height 0.63 in [16 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Female Connector Solder Attachment 2 Hole Flange Mount for ET38321, ET-SR- 405FL, ET38323, ET-RG405, .481 inch Hole Spacing ET11151

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



SMA Female Connector Solder Attachment 2 Hole Flange Mount f or ET38321, ET38322, ET38322J, ET-RG405, .481 inch Hole Spacing



RF Connectors Technical Data Sheet ET111151

Weight 0.006 lbs [2.72 g]

Material Specifications

| Description | Material | Plating |
|-------------|------------------|---------------------|
| Contact | Beryllium Copper | Gold MIL-G-45204 |
| Insulation | PTFE | |
| Body | Stainless Steel | Gold MIL-G-45204 |

Environmental Specifications

Temperature

Operating Range -65 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:


SMA Female Connector Solder Attachment 2 Hole Flange Mount for ET38321, ET38322, ET38323, ET-RG405, .481 inch Hole Spacing from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Female Connector Solder Attachment 2 Hole Flange Mount for ET38321, ET38322, ET-RG405, .481 inch Hole Spacing ET11151

URL: https://www.ebeestock.com/sma-female-connector-solder-attachment-2-hole-flange-mount-for-pe-sr405al-pe-sr405fl-pe-sr405flj-rg405-481-inch-hole-spacing-0011151

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.

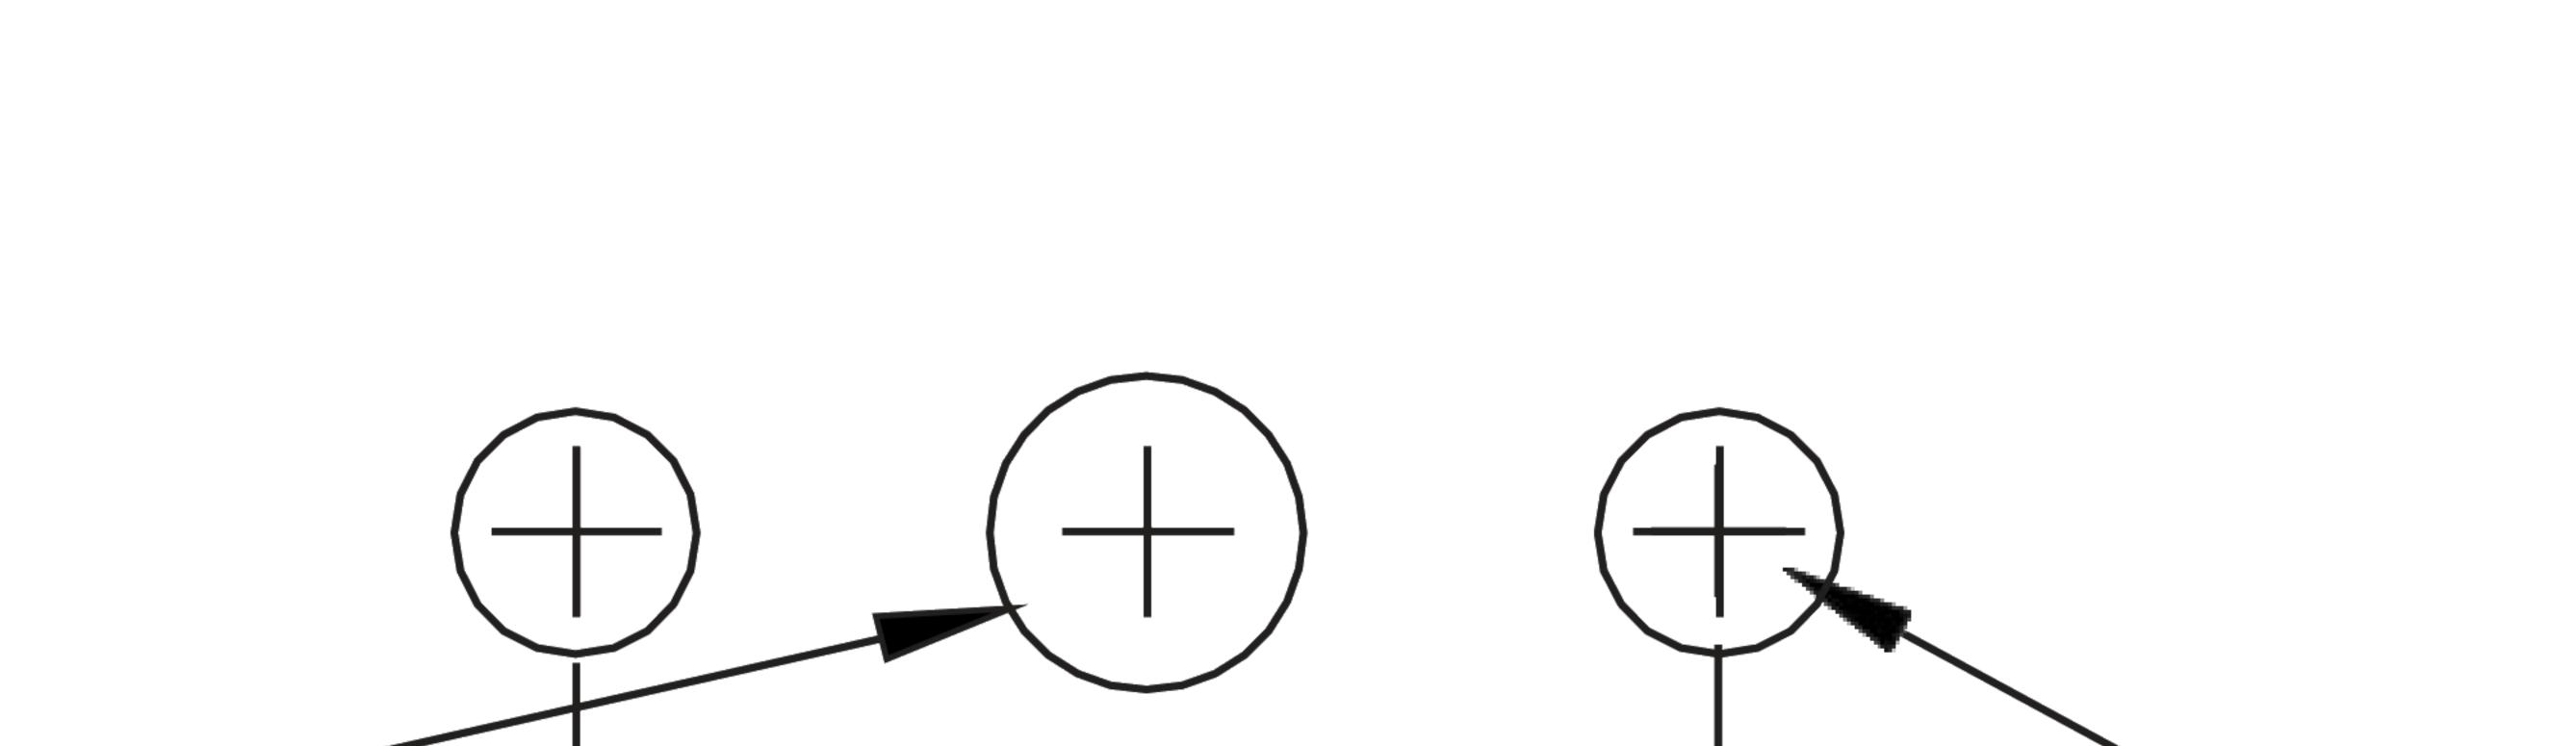

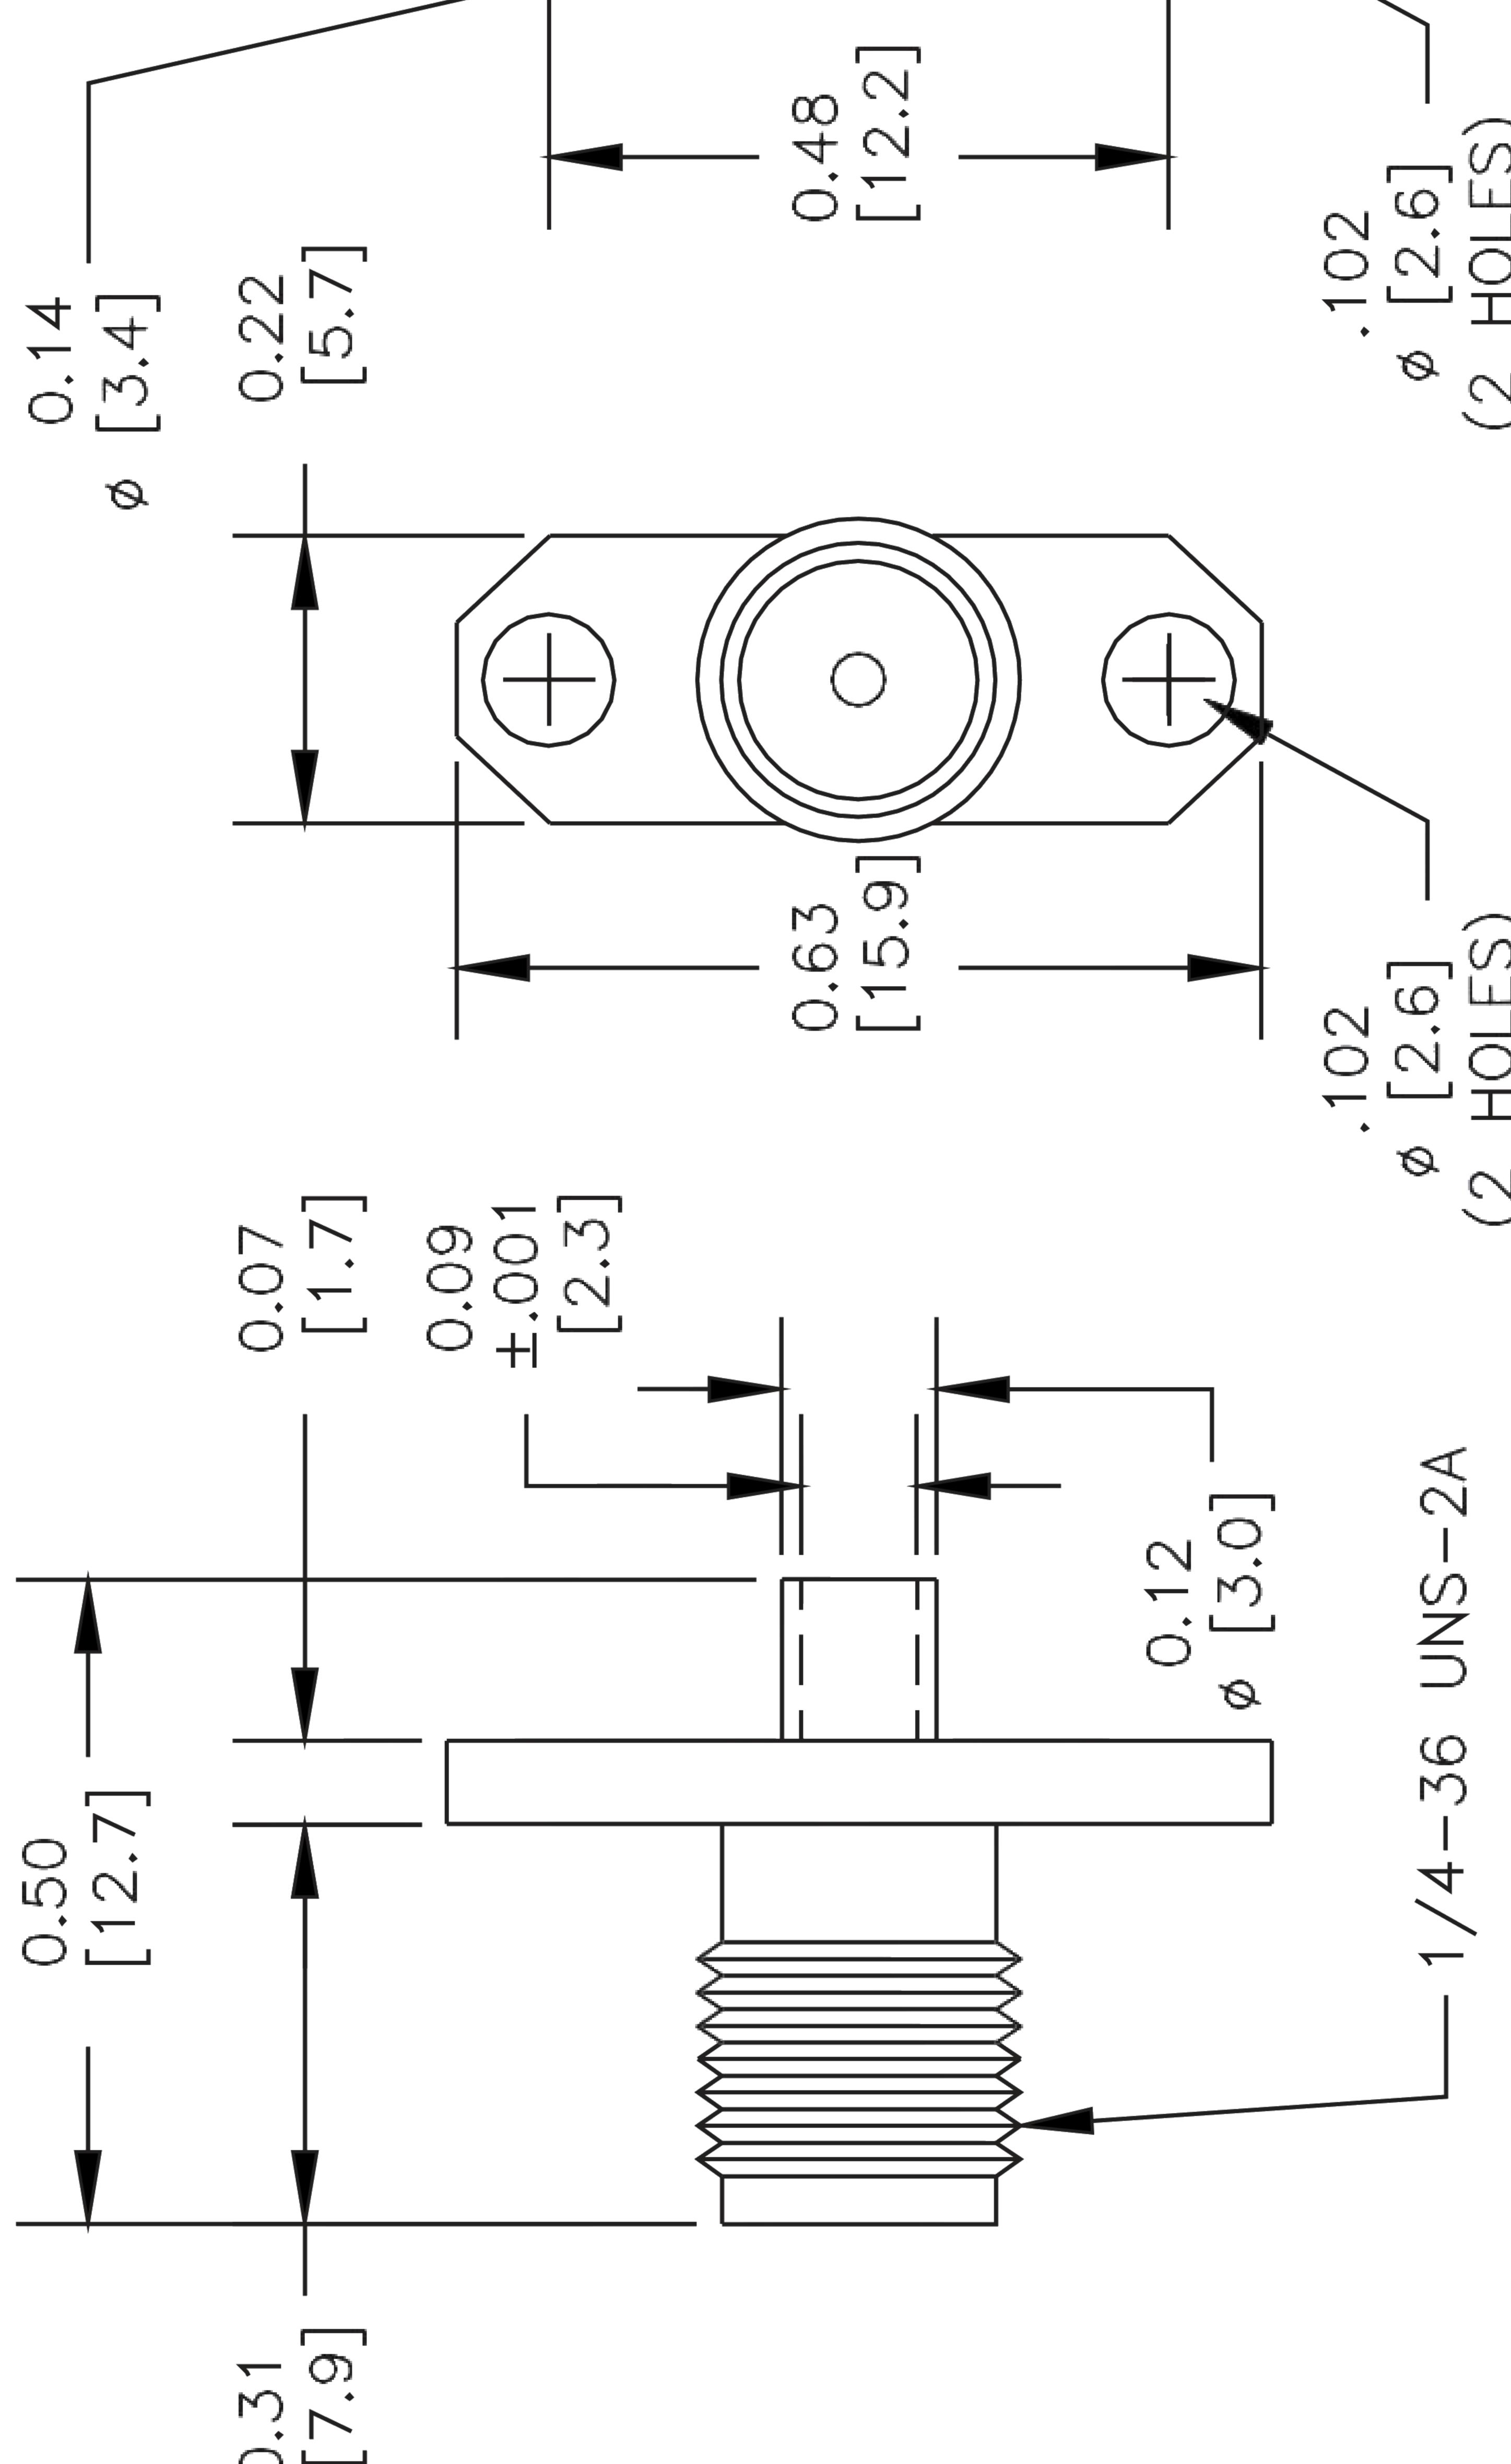

Ebeestock.com

8th Floor, Building 1, Yongfu Science
and Technology Center Industrial Park,
trict 5, Humen,523900, Dongguan, Guange:
www.ebeestock.com Email: sales@ebees

NTO BODY UNTIL STOR IS FLUSHWITH SR. SOLDER OUTER DBODY.