

SMA Female Connector Clamp/Solder Attachment for ET38398, ET 38399



# RF Connectors Technical Data Sheet ET11206

## Configuration

- SMA Female Connector
- MIL-STD-348
- 50 Ohms

- Straight Body Geometry
- ET38398, ET38399 Interface Type
- Clamp/Solder Attachment

#### Features

Gold Plated Contact

Contact plating according to MIL-G-45204

## Applications

General Purpose Test

Custom Cable Assemblies

#### Description

Ebeestock's ET11206 SMA female connector with clamp/solder attachment for ET38398 and ET38399 is part of our full line of RF components available for same-day shipping.

Our SMA female connector ET11206 datasheet specifications and drawing with dimensions are shown below in this PDF. Ebeestock's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Ebeestock has the right connector for the job. Ebeestock can also expertly build your custom cable assemblies for you and ship same-day.

#### Mechanical Specifications

#### Size

 Length
 0.875 in [22.23 mm]

 Width/Dia.
 0.312 in [7.92 mm]

 Weight
 0.013 lbs [5.9 g]

#### Material Specifications

Description	Material	Plating
Contact		Gold MIL-G-45204
Insulation	PTFE	
Body	Brass	Gold MIL-G-45204

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Female Connector Clamp/Solder Attachment for ET38398, ET38399 ET11206

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



SMA Female Connector Clamp/Solder Attachment for ET38398, ET 38399



# RF Connectors Technical Data Sheet ET11206

Compliance Certifications (see product page for current document)

#### Plotted and Other Data

Notes:


SMA Female Connector Clamp/Solder Attachment for ET38398, ET38399 from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Female Connector Clamp/Solder Attachment for ET38398, ET38399 ET11206

**URL:** https://www.ebeestock.com/sma-female-connector-clamp-solder-attachment-for-rg188-ds-rg316-ds-0011206


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

# SMA Female Connector Clamp/Solder Attachment for ET38398, ET38399

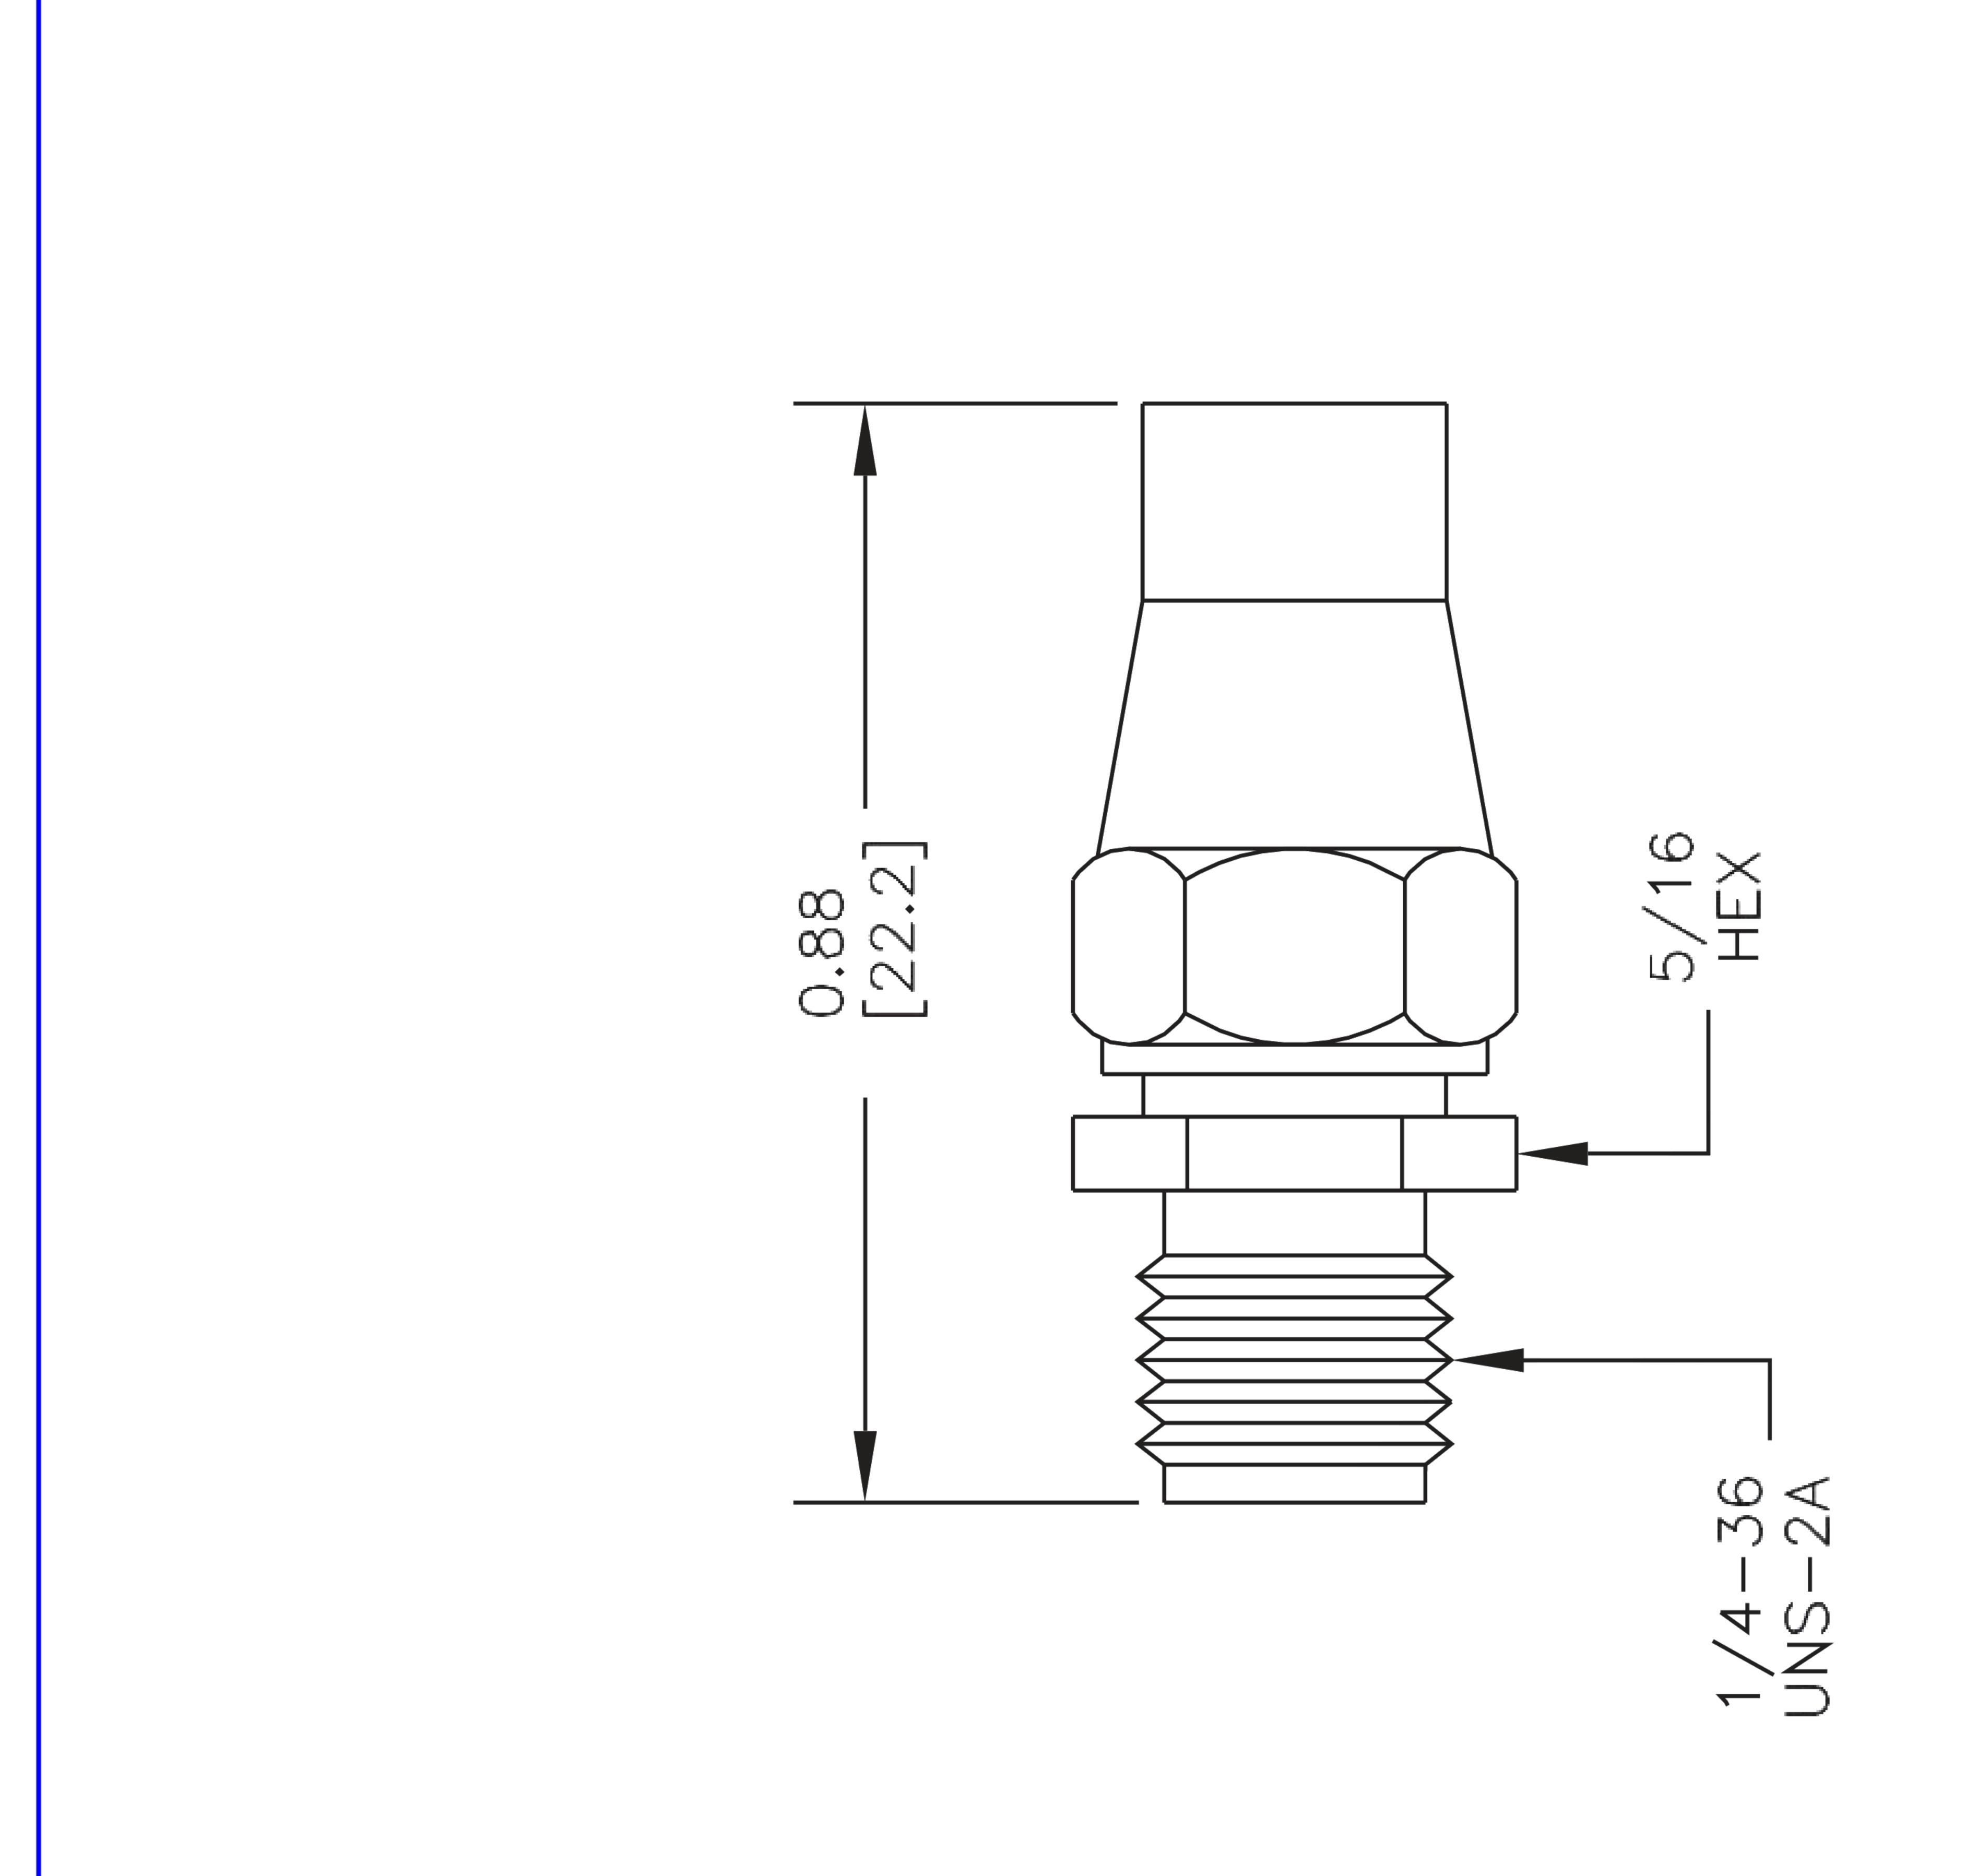

# SSEMBLY PROCEDURE

- 1. SLIDE CLAMP NUT (1) OVER CABLE. STRIP CABLE AS SHOWN IN ASSEMBLY A. TIN CENTER CONDUCTOR. SLIT JACKET IN 2 PLACES & REMOVE ONE SIDE OF JACKET TO END OF SLIT AS SHOWN IN ASSEMBLY B. DO NOT NICK BRAID WHEN CUTTING ONE SIDE OF JACKET.
- INSERT WEDGE ASSEMBLY (2) BETWEEN BR
   DIELECTRIC. CENTER CONDUCTOR MUST
   ENTER HOLE IN INSULATOR.
- 3. INSERT CONTACT (3) IN INSULATOR & SOLD CONTACT TO CENTER CONDUCTOR. INSERT CABLE ASSEMBLY INTO BODY & TIGHTEN.

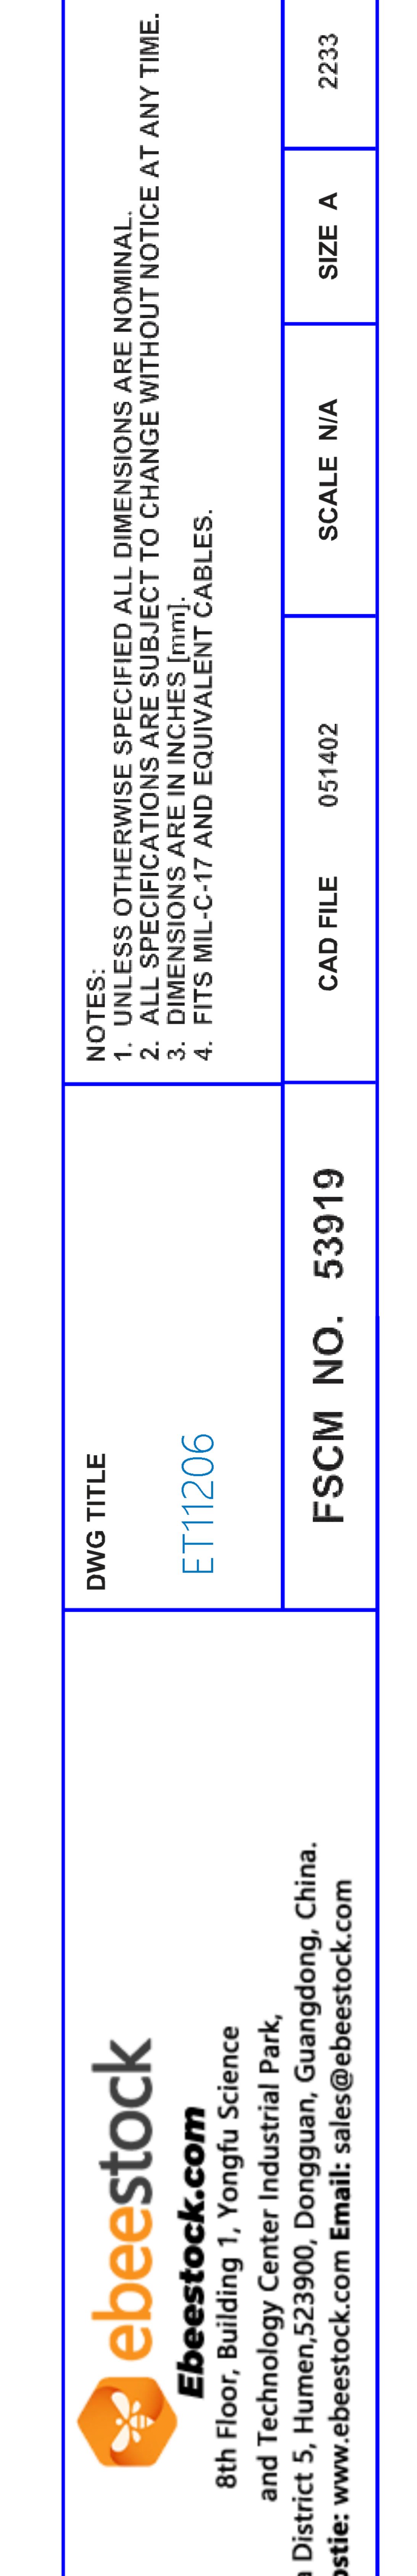

 $\mathcal{O}(\mathcal{O})$