

SMA Female Bulkhead Mount Hermetically Sealed Connector Sold er Attachment Stub Terminal, .235 inch D Hole



RF Connectors Technical Data Sheet

ET11333

Configuration

- SMA Female Connector
- MIL-STD-348
- 50 Ohms
- Features
 - Max. Operating Frequency 18 GHz
 - Gold Plated Contact

- Straight Body Geometry
- Connector Interface Types: Stub
- Bulkhead
- Contact plating according to MIL-G-45204
- Hermetically Sealed

Applications

General Purpose Test

Rack and Panel Mount Applications

Description

Ebeestock's ET11333 SMA female bulkhead hermetically sealed connector with solder attachment Stub terminal (.235 inch D hole) is part of our full line of RF components available for same-day shipping. Our SMA female connector operates up to a maximum frequency of 18 GHz. This SMA bulkhead connector allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Our SMA female bulkhead connector ET11333 datasheet specifications and drawing with dimensions are shown below in this PDF. Ebeestock's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Ebeestock has the right connector for the job. Ebeestock can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz

Mechanical Specifications

Size

 Length
 0.62 in [15.75 mm]

 Width/Dia.
 0.437 in [11.10 mm]

 Weight
 0.013 lbs [5.9 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Female Bulkhead Mount Hermetically Sealed Connector Solder Attachment Stub Terminal, .235 inch D Hole ET11333

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



SMA Female Bulkhead Mount Hermetically Sealed Connector Sold er Attachment Stub Terminal, .235 inch D Hole



RF Connectors Technical Data Sheet

ET11333

Material Specifications

Description	Material	Plating	
Contact		Gold MIL-G-45204	
Insulation	PTFE		
Body	Stainless Steel	Gold MIL-G-45204	

Environmental SpecificationsTemperature

Operating Range Hermetic Seal

-65 to +165 deg C Leak rate not to exceed 1 x 10^-7 cc/sec of helium at 1 atm differential.

Compliance Certifications (see product page for current document)

Plotted and Other Data


Notes:

SMA Female Bulkhead Mount Hermetically Sealed Connector Solder Attachment Stub Terminal, .235 inch D Hole from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Female Bulkhead Mount Hermetically Sealed Connector Solder Attachment Stub Terminal, .235 inch D Hole ET11333

URL: https://www.ebeestock.com/sma-female-bulkhead-mount-hermetically-sealed-connector-solder-a ttachment-stub-terminal-235-inch-d-hole-0011333

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

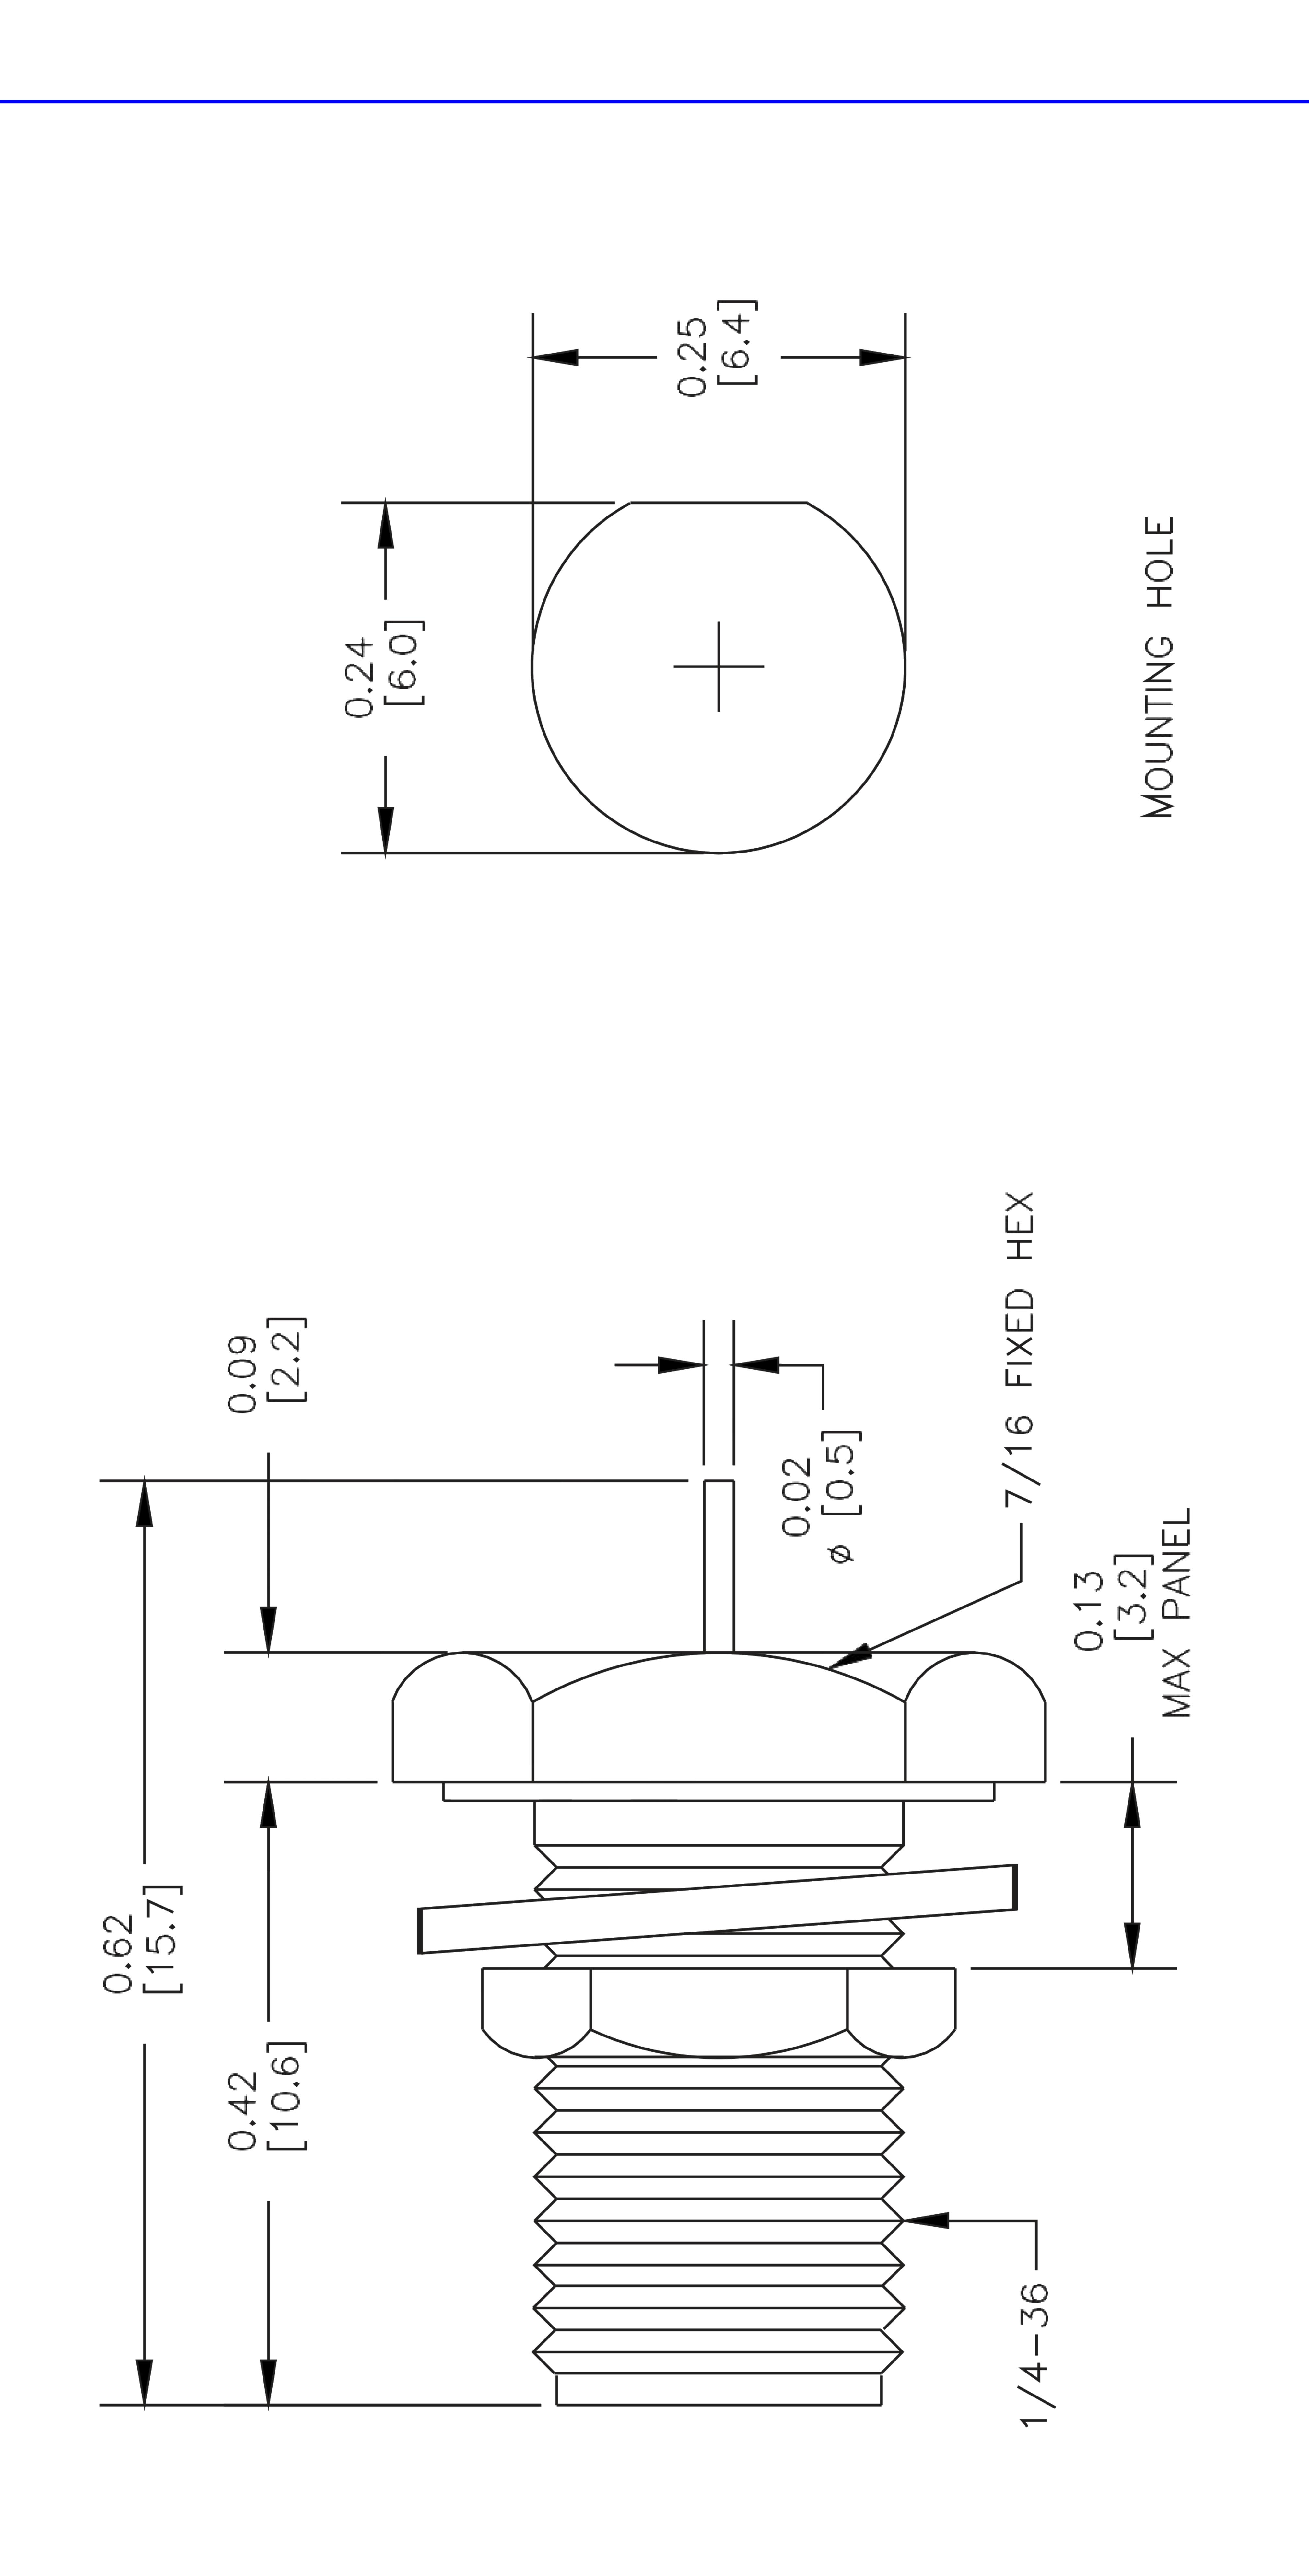

DWG TITLE

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TO STAND STAND