

SMA Female Connector Clamp Attachment Vertical Launch PCB, R emovable Microstrip Launch



RF Connectors Technical Data Sheet

ET11359

Configuration

- SMA Female Connector
- 50 Ohms

Features

- Max. Operating Frequency 26.5 GHz
- Good VSWR of 1.3:1

- Straight Body Geometry
- Connector Interface Types: Vertical Launch
- Gold Plated Beryllium Copper Contact
- Reusable vertical launch installation

Applications

- General Purpose Test
- PCB Applications

- Signal Integrity Measurement
- Chip Evaluations

- SERDES
- Vertical Launch Test Fixtures

Description

Ebeestock's ET11359 SMA female connector with clamp attachment for Vertical Launch PCB is part of our full line of RF components available for same-day shipping. Our SMA female connector operates up to a maximum frequency of 26.5 GHz and offers good VSWR of 1.3:1.

Our SMA female connector ET11359 datasheet specifications and drawing with dimensions are shown below in this PDF. Ebeestock's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Ebeestock has the right connector for the job. Ebeestock can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		26.5	GHz
VSWR			1.3:1	

Electrical Specification Notes:

Actual VSWR performance is largely dependent on circuit board design. For optimal results, the connector and circuit launch geometry should be modeled using Electromagnetic Simulation tools.

Mechanical Specifications

0.441 in [11.2 mm] Length 0.222 in [5.64 mm] Width/Dia. Height 0.39 in [9.91 mm]

Mating Cycles 500 Cycles

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Female Connector Clamp Attachment Vertical Launch PCB, Removable Microstrip Launch ET11359

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



SMA Female Connector Clamp Attachment Vertical Launch PCB, R emovable Microstrip Launch



RF Connectors Technical Data Sheet

ET11359

Material Specifications

Description	Material	Plating	
Contact	Beryllium Copper	Gold	
Insulation	PTFE		
Outer Conductor	Passivated Stainless Steel		
Body	Passivated Stainless Steel		

Mechanical Specification Notes: Launch Pin is Gold Plated Beryllium Copper

Environmental Specifications

Temperature

Operating Range

-40 to +135 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Female Connector Clamp Attachment Vertical Launch PCB, Removable Microstrip Launch ET11359

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



SMA Female Connector Clamp Attachment Vertical Launch PCB, R emovable Microstrip Launch




RF Connectors Technical Data Sheet

ET11359

Assembly Instruction


STEP 1:

Position vertical launch above substrate.

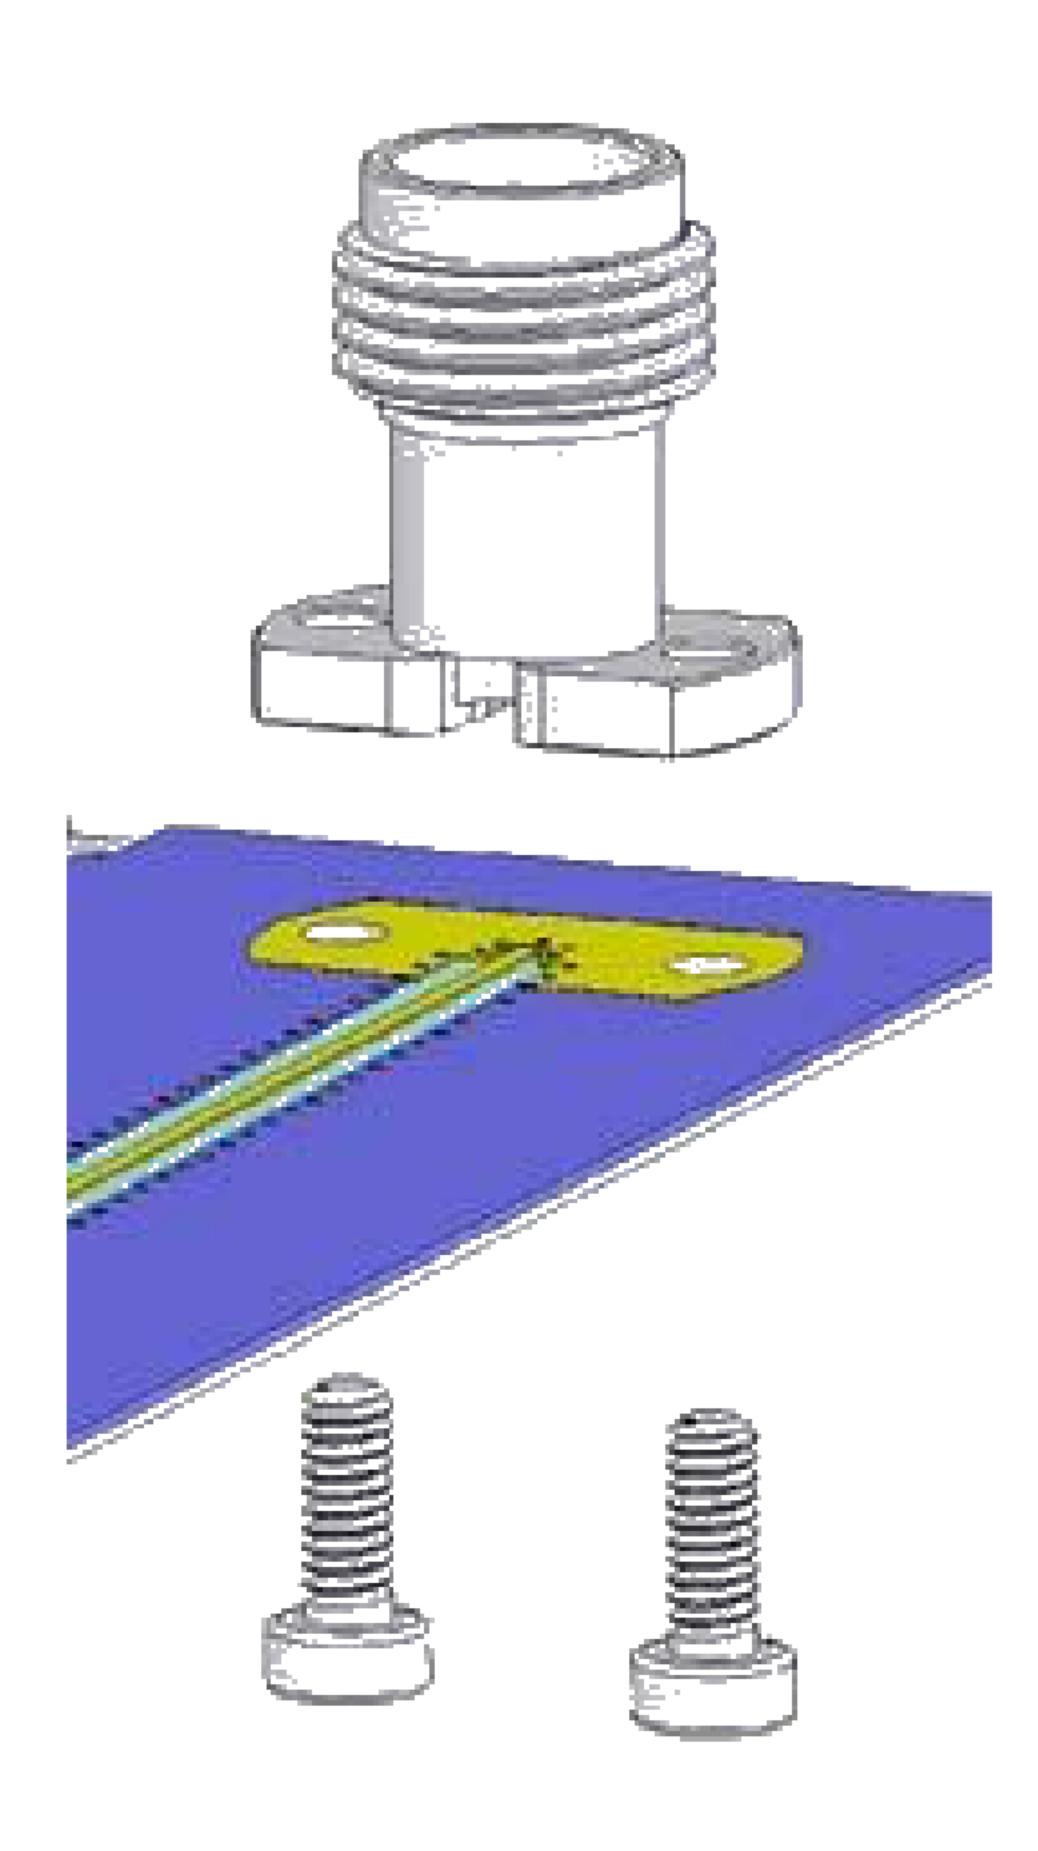

STEP 2:

Insert screws and tighten connector body against the substrate, while ensuring center pin is centered on the trace or landing pad.

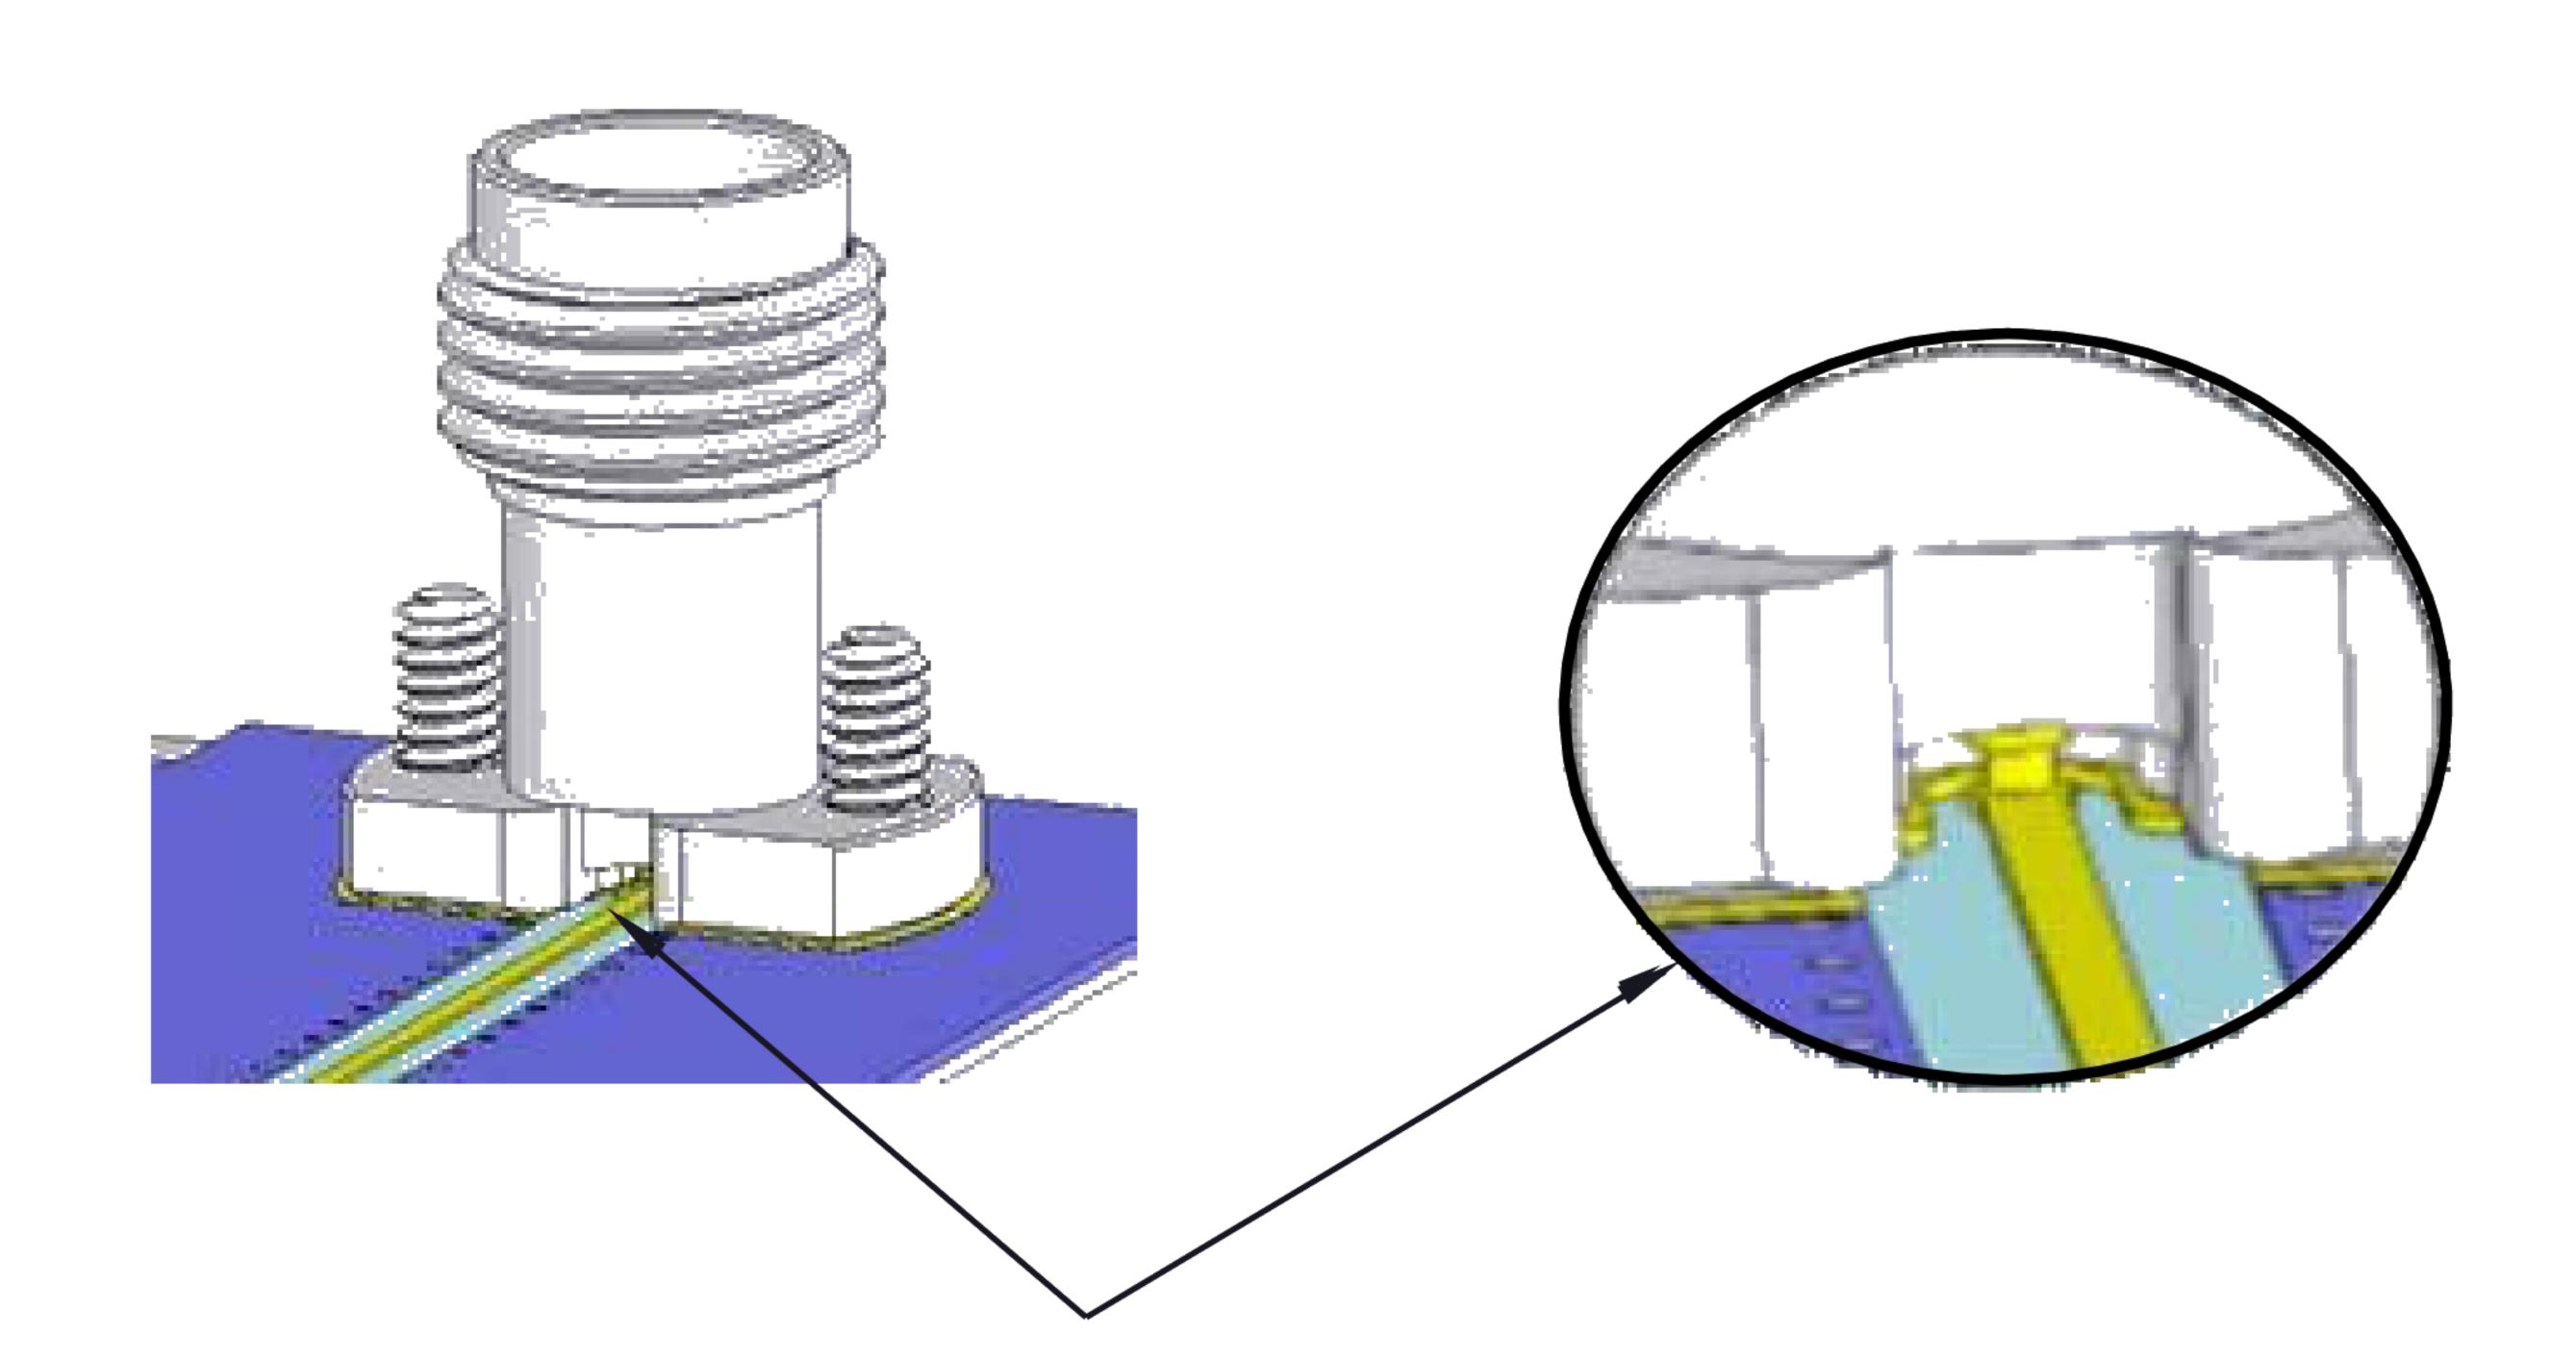

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Female Connector Clamp Attachment Vertical Launch PCB, Removable Microstrip Launch ET11359

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



SMA Female Connector Clamp Attachment Vertical Launch PCB, R emovable Microstrip Launch



RF Connectors Technical Data Sheet

ET11359

SMA Female Connector Clamp Attachment Vertical Launch PCB, Removable Microstrip Launch from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Female Connector Clamp Attachment Vertical Launch PCB, Removable Microstrip Launch ET11359

URL: https://www.ebeestock.com/sma-female-connector-clamp-attachment-vertical-launch-pcb-remova ble-microstrip-launch-0011359

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

