



### RF Connectors Technical Data Sheet

ET11364

#### Configuration

- SMA Female Connector
- 50 Ohms
- Straight Body Geometry

- End Launch Interface Type
- Clamp/Solder (Captive Contact) Attachment

#### Features

- Max. Operating Frequency 26.5 GHz
- Excellent VSWR of 1.2:1

- Gold Plated Beryllium Copper Contact
- Optimized for 12 mil RO4003C

#### Applications

- General Purpose Test
- PCB Applications
- Signal Integrity Measurement
- Chip Evaluations
- SERDES
- End Launch Test Fixtures
- Microstrip Launches
- CPW Launches

#### Description

Ebeestock's ET11364 SMA female connector with clamp/solder (captive contact) attachment for end launch PCB is part of our full line of RF components available for same-day shipping. Our SMA female connector operates up to a maximum frequency of 26.5 GHz and offers excellent VSWR of 1.2:1.

Our SMA female connector ET11364 datasheet specifications and drawing with dimensions are shown below in this PDF. Ebeestock's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Ebeestock has the right connector for the job. Ebeestock can also expertly build your custom cable assemblies for you and ship same-day.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		26.5	GHz
VSWR			1.2:1	

Electrical Specification Notes:

Actual VSWR performance is largely dependent on circuit board design. For optimal results, the connector and circuit launch geometry should be modeled using Electromagnetic Simulation tools.

#### Mechanical Specifications

Size

Length 0.561 in [14.25 mm] Width/Dia. 0.469 in [11.91 mm]

Mating Cycles 500 Cycles

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Female Connector Clamp/Solder (Captive Contact) Attachment End Launch PCB, Microstrip/Coplanar Launch, 0.012 inch ET11364





## RF Connectors Technical Data Sheet

ET11364

#### Material Specifications

Description	Material	Plating	
Contact	Beryllium Copper	Gold	
Insulation	PTFE		
Outer Conductor	Passivated Stainless Steel		
Body	Passivated Stainless Steel		

-40 to +125 deg C

Mechanical Specification Notes: Launch Pin is Gold Plated Beryllium Copper

**Environmental Specifications** 

Temperature

Operating Range

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Female Connector Clamp/Solder (Captive Contact) Attachment End Launch PCB, Microstrip/Coplanar Launch, 0.012 inch ET11364






### RF Connectors Technical Data Sheet

PE45463

#### **Assembly Instruction**


#### STEP 1:

Insert end launch connector (including ground block & screws) in the edge position of substrate.

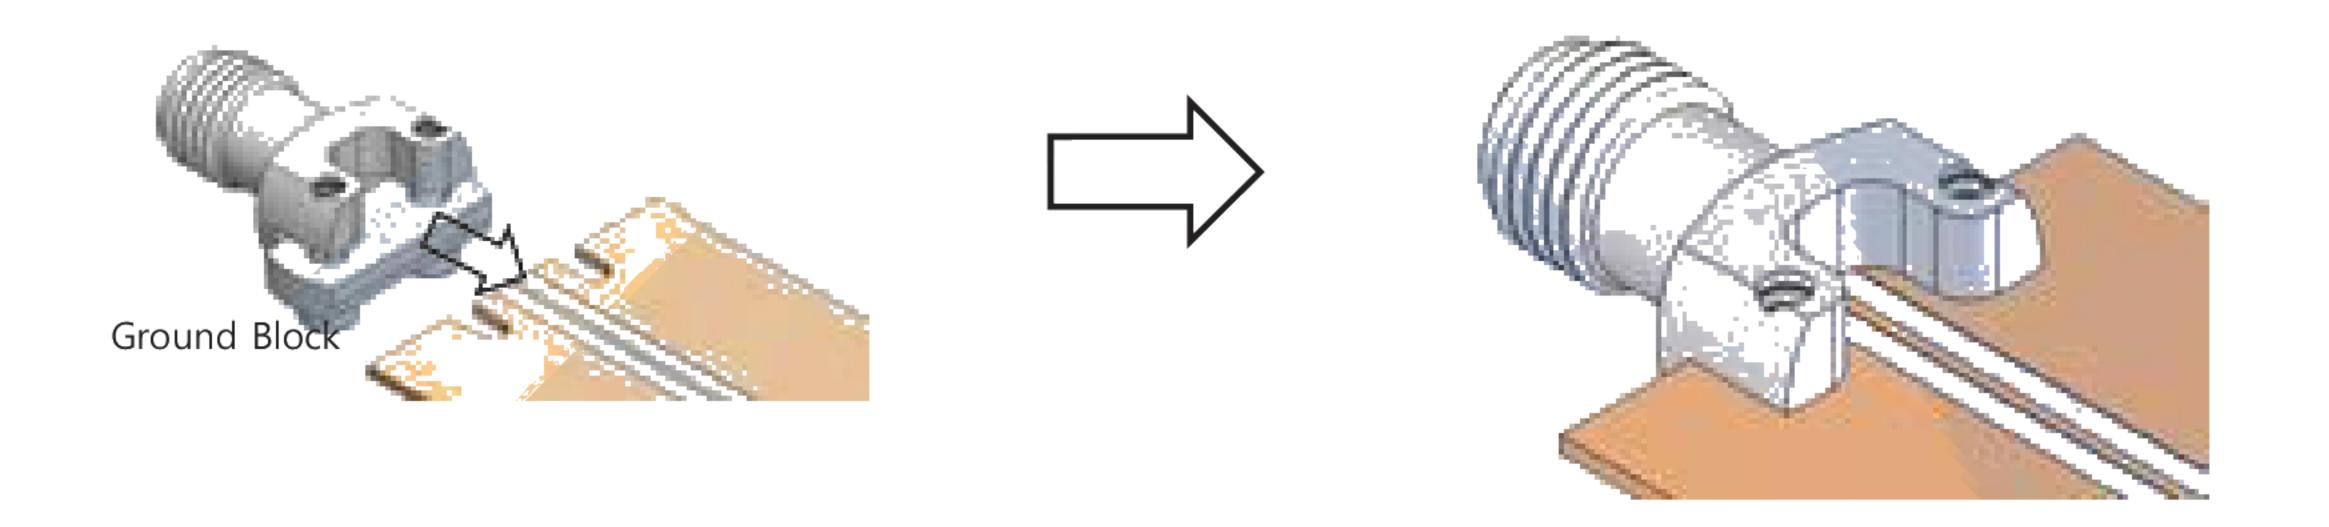

#### STEP 2:


Tighten ground block against the substrate using two screws while ensuring flat pin is centered on the trace.

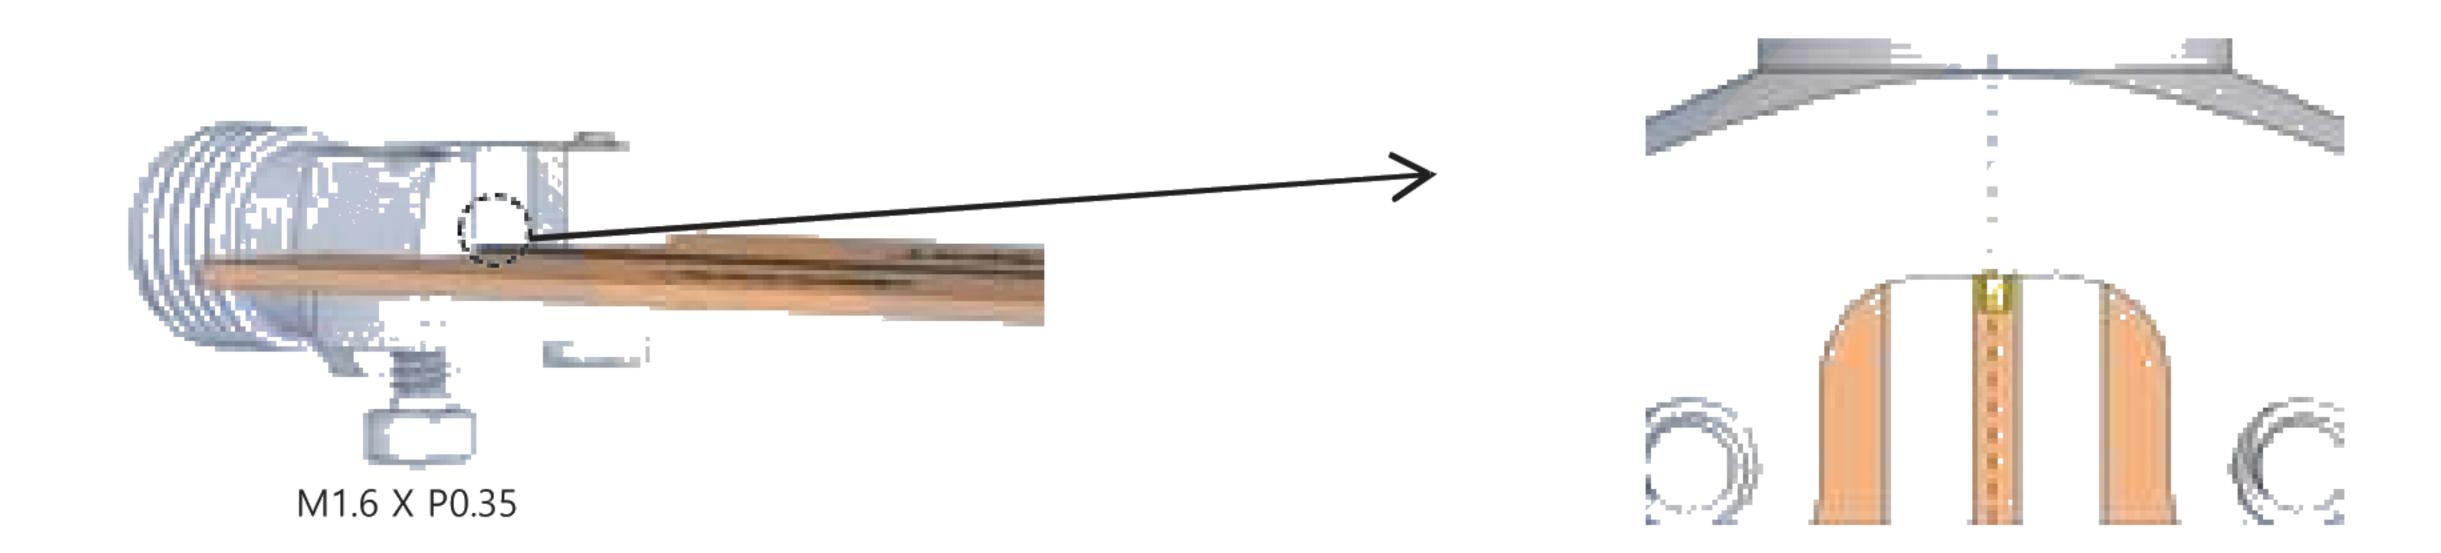

#### STEP 3:


Solder the flat pin to center trace on substrate while the connector is held in the correct position.

(Note: solder should flow along the length of the exposed flat pin for good electrical performance)

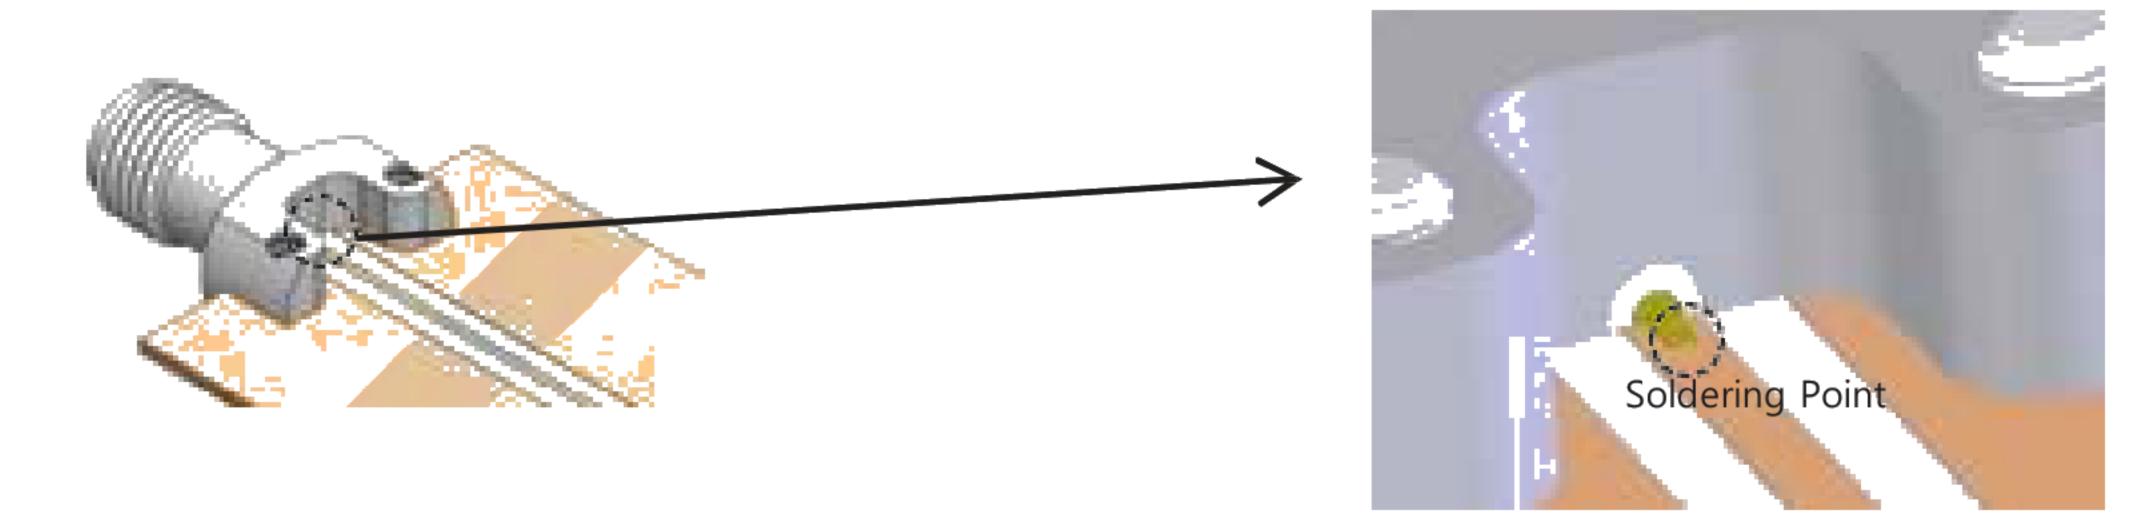

#### STEP 4:

Remove any excess solder and clean all flux and other residues from the trace.

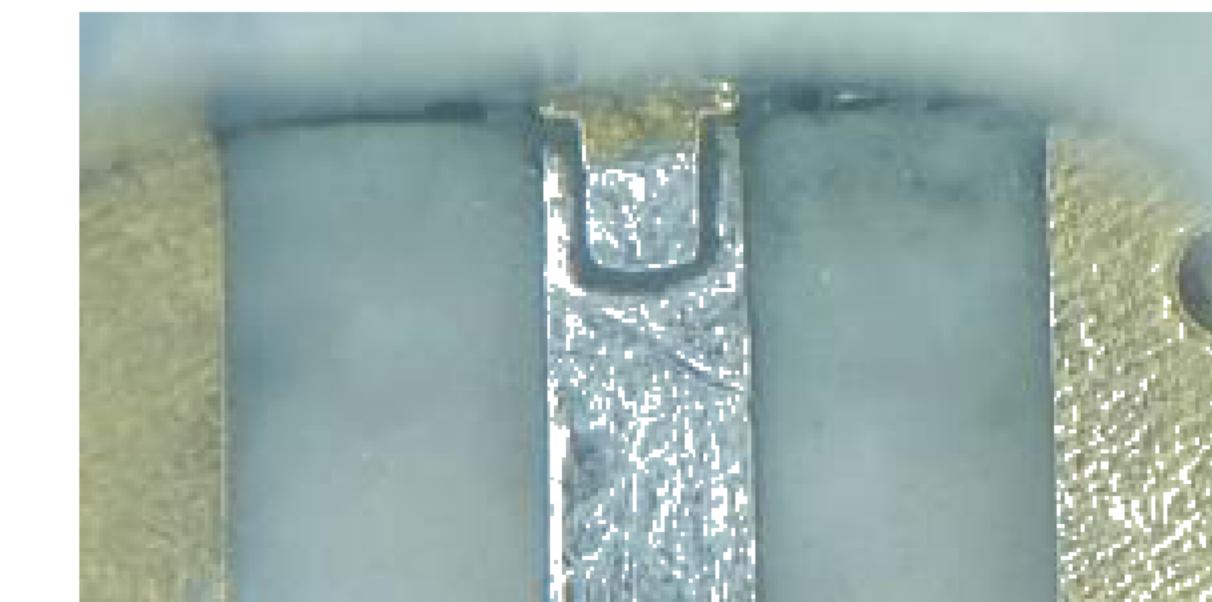

(Substrate shown for assembly instruction purposes only)

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Female Connector Clamp/Solder (Captive Contact) Attachment End Launch PCB, Microstrip/Coplanar Launch, 0.012 inch ET11364

www.ebeestock.com






# RF Connectors Technical Data Sheet

PE45463

#### TYPICAL PCB GEOMETRY

SUBSTRATE THICKNESS: 0.012"
MICROSTRIP WIDTH: 0.027"
SUBSTRATE MATERIAL: RO4003C

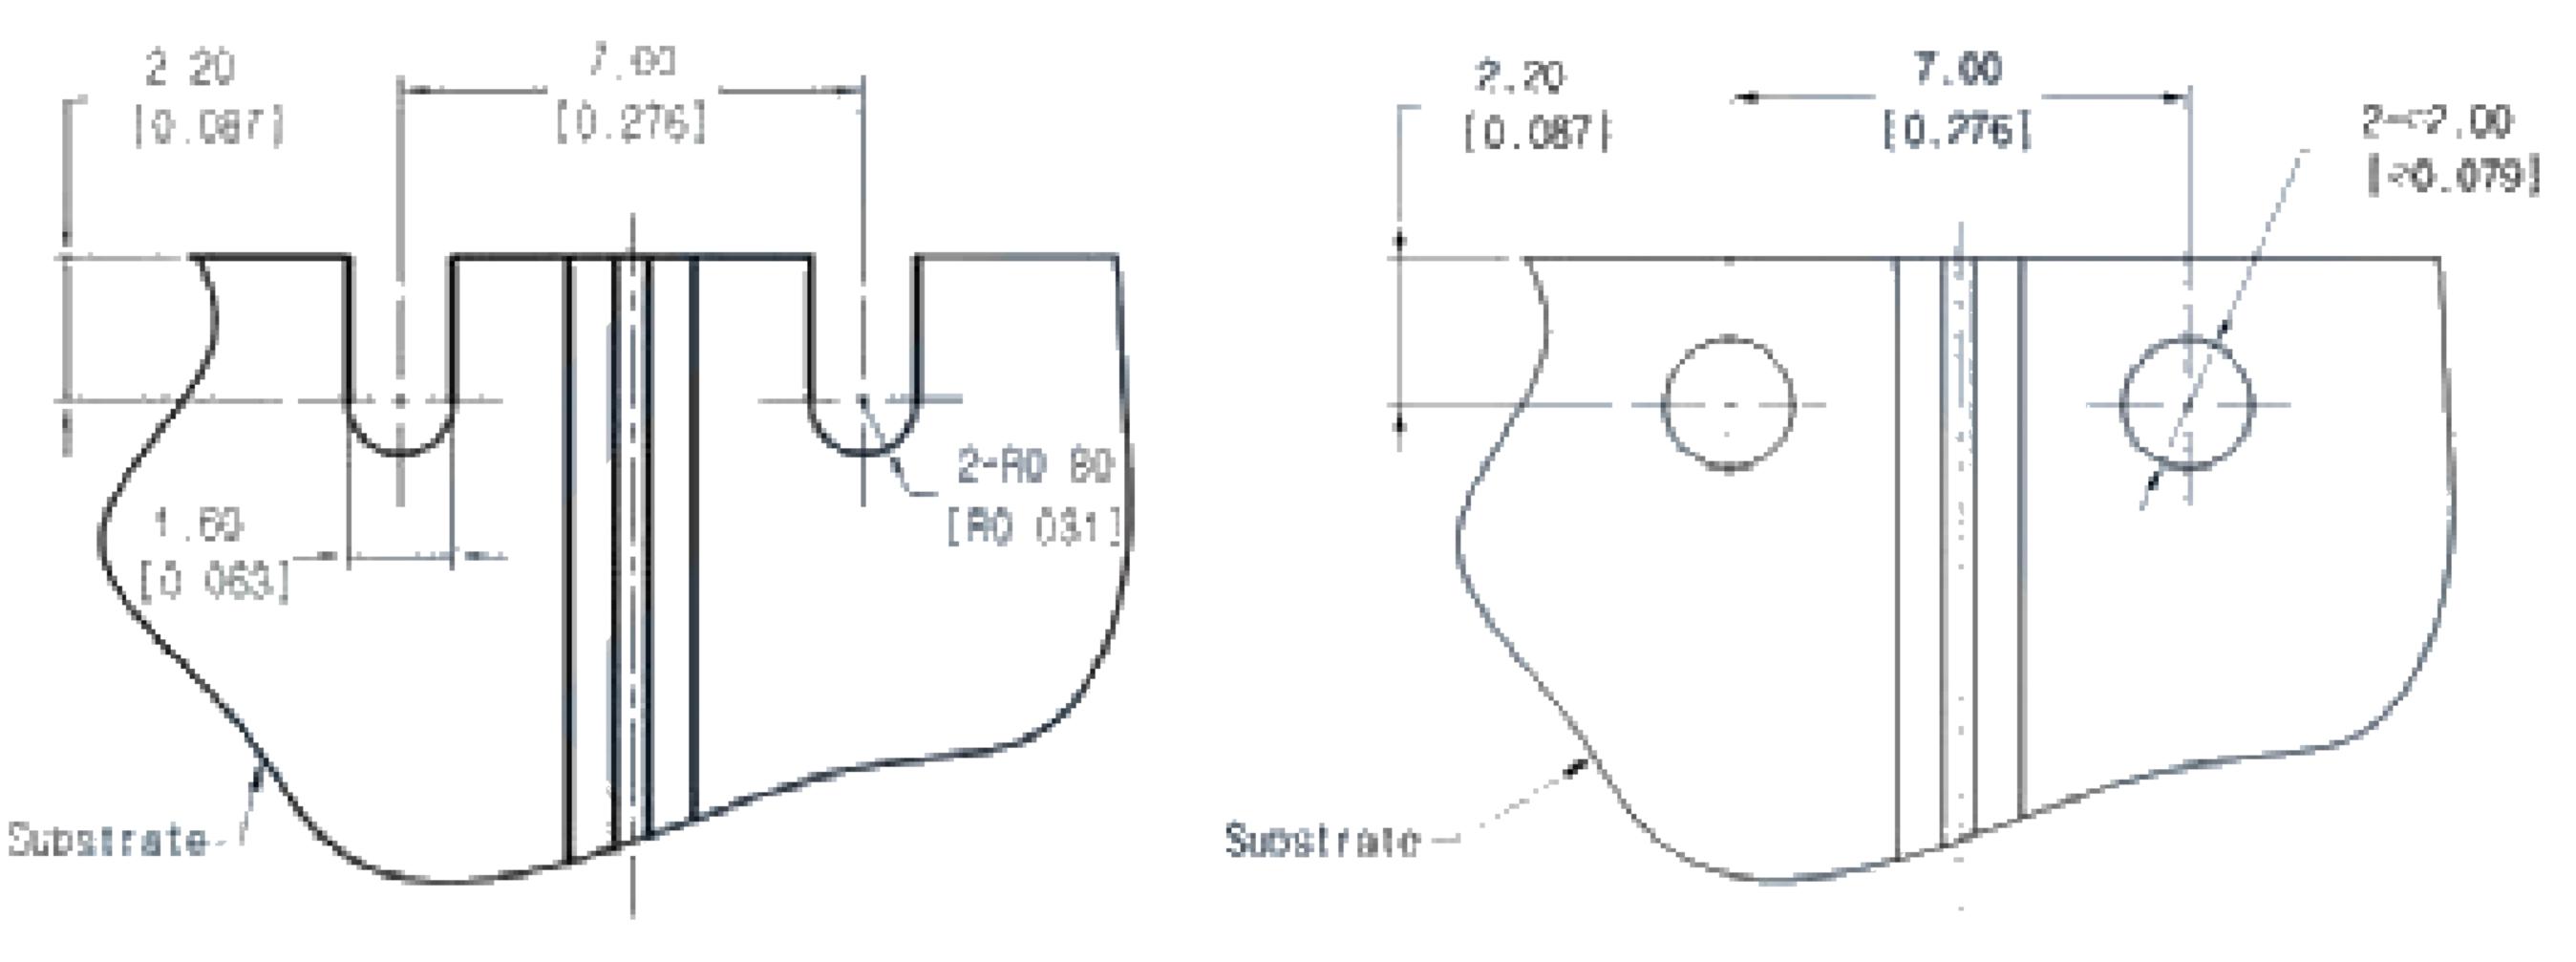

Dimensions shown in mm [inch]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Female Connector Clamp/Solder (Captive Contact) Attachment End Launch PCB, Microstrip/Coplanar Launch, 0.012 inch ET11364







# RF Connectors Technical Data Sheet

PE45463

#### Typical Performance Data

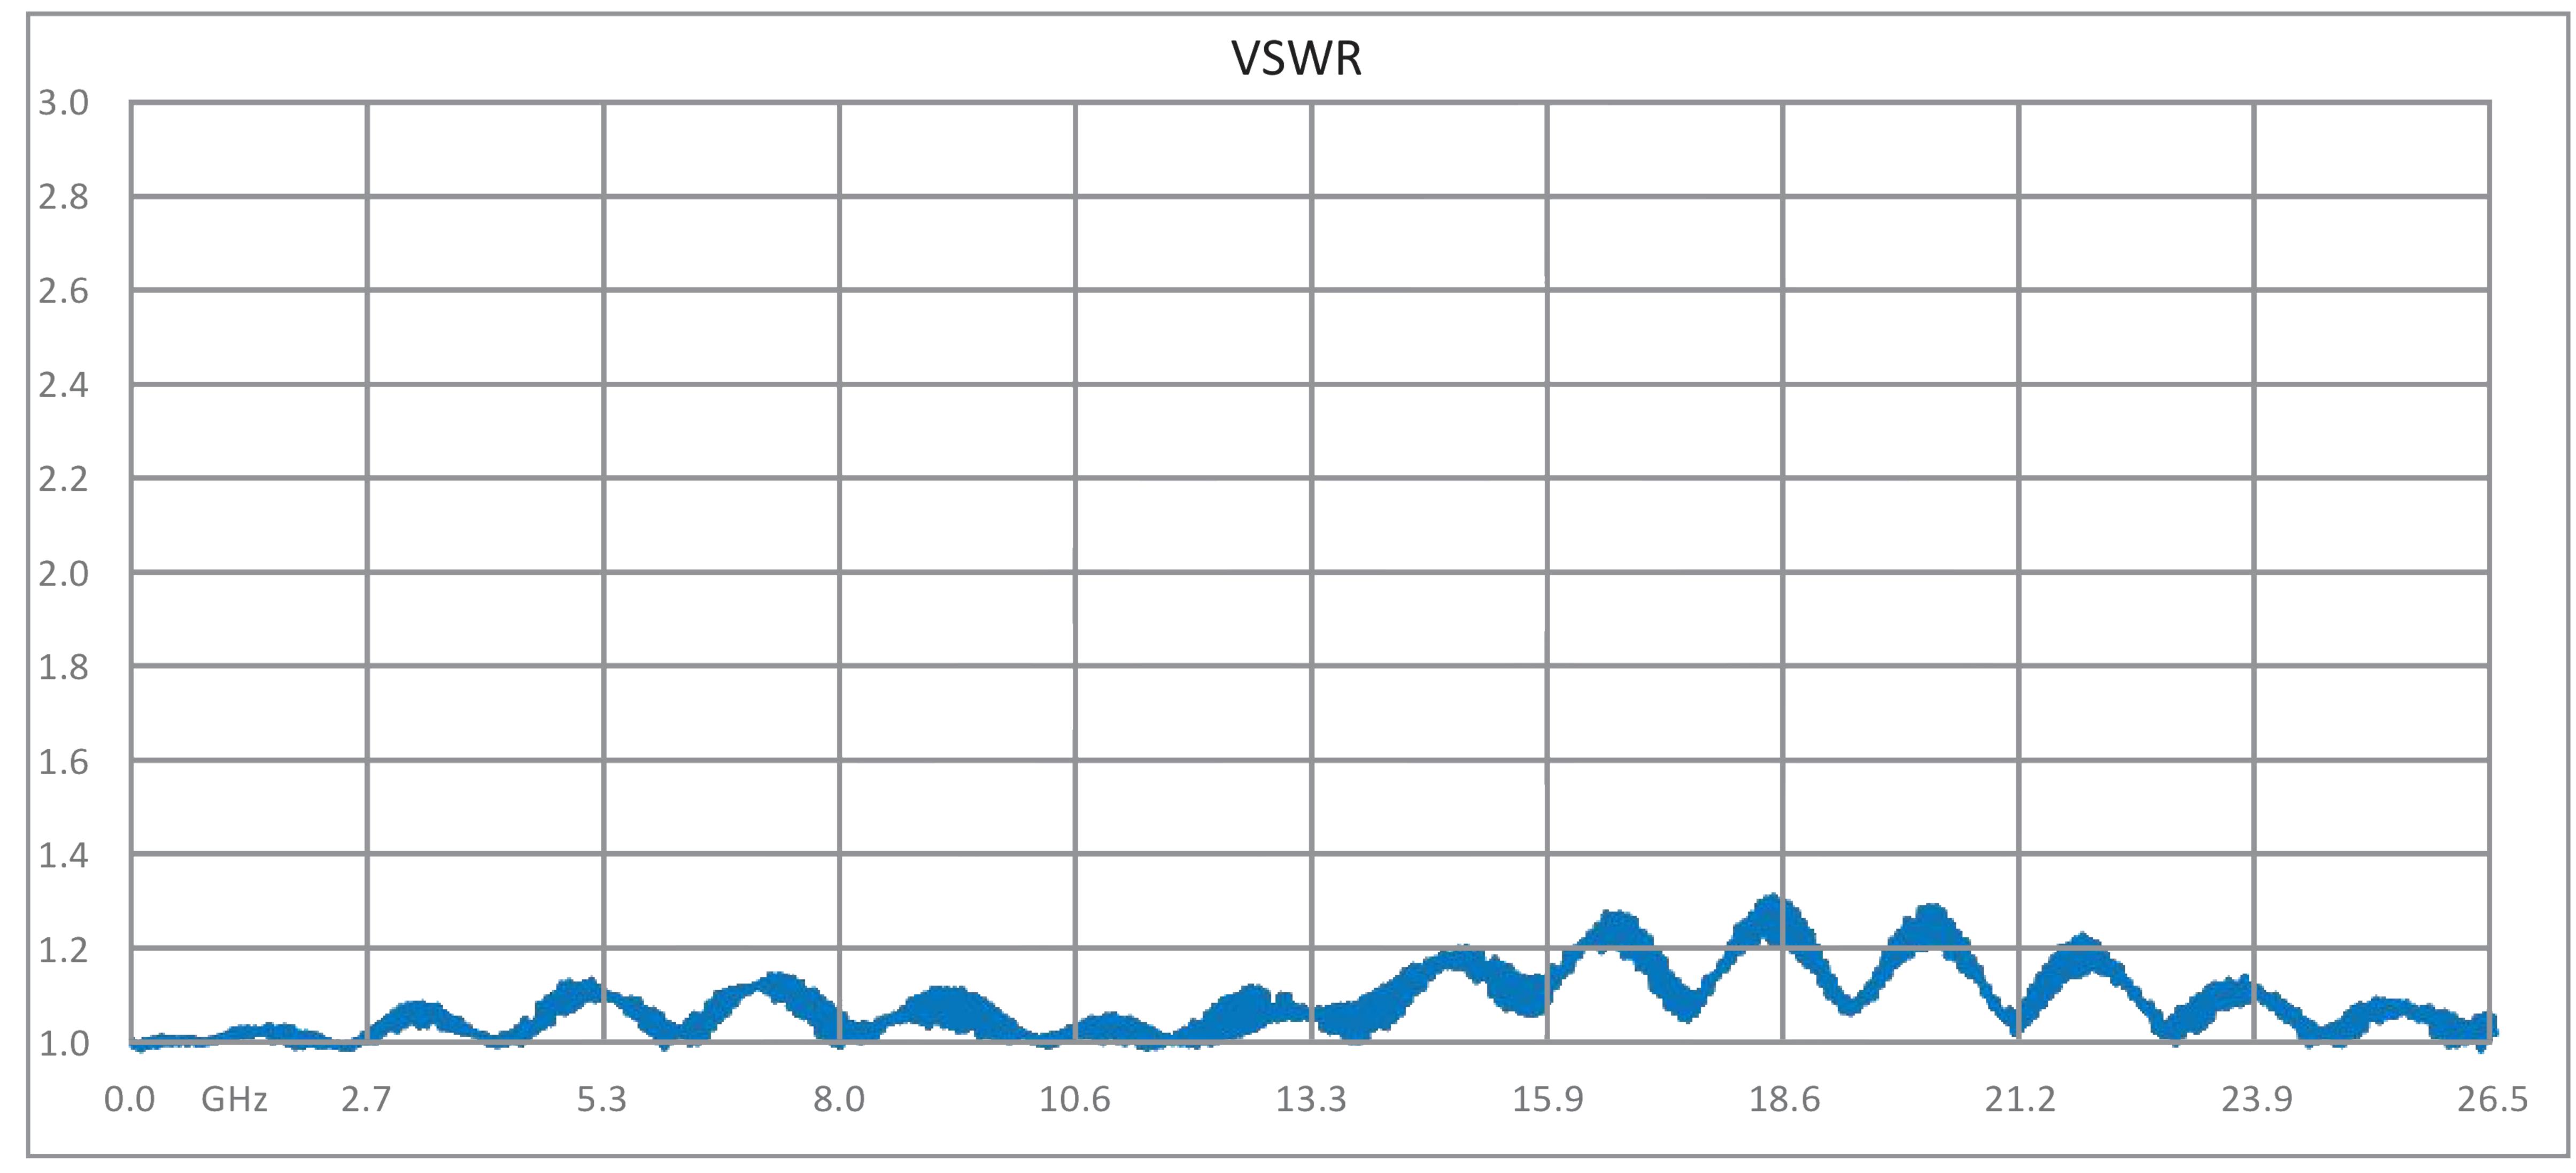

Test data taken with 2 connectors on both ends of test fixture

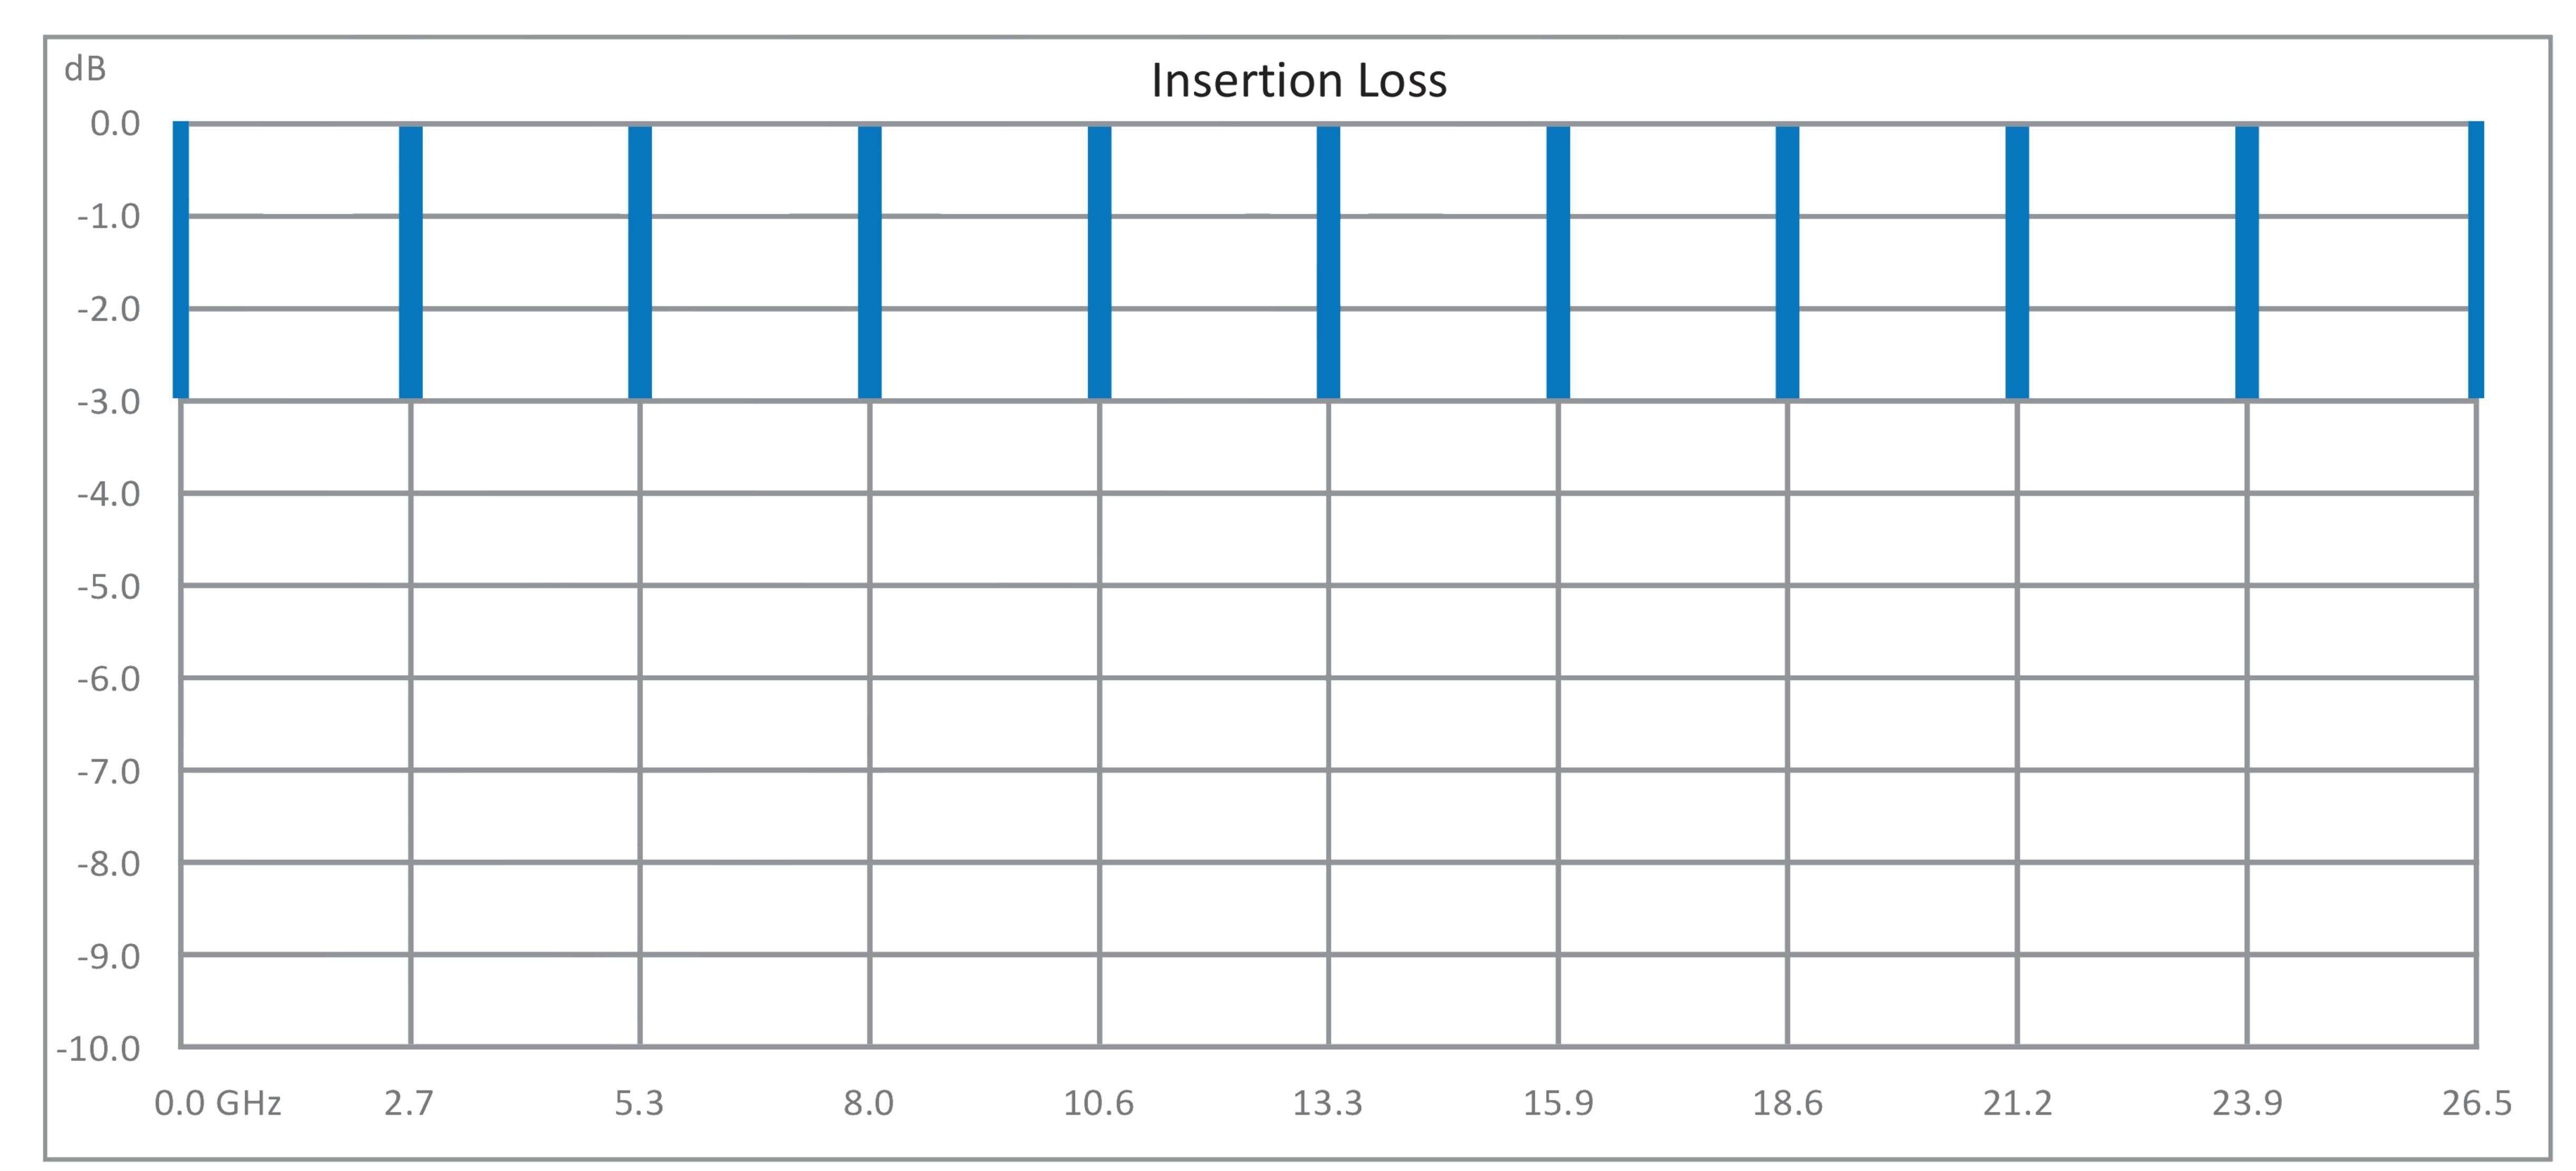

Test data taken with 2 connectors on both ends of test fixture

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Female Connector Clamp/Solder (Captive Contact) Attachment End Launch PCB, Microstrip/Coplanar Launch, 0.012 inch ET11364





# RF Connectors Technical Data Sheet

ET11364

SMA Female Connector Clamp/Solder (Captive Contact) Attachment End Launch PCB, Microstrip/Coplanar Launch, 0.012 inch from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Female Connector Clamp/Solder (Captive Contact) Attachment End Launch PCB, Microstrip/Coplanar Launch, 0.012 inch ET11364

**URL:** https://www.ebeestock.com/sma-female-connector-clamp-solder-captive-contact-attachment-end-launch-pcb-microstrip-coplanar-launch-0-012-inch-0011364

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

