


SMA Female Bulkhead Mount Connector Solder Attachment for ET 38351, .235 inch D Hole

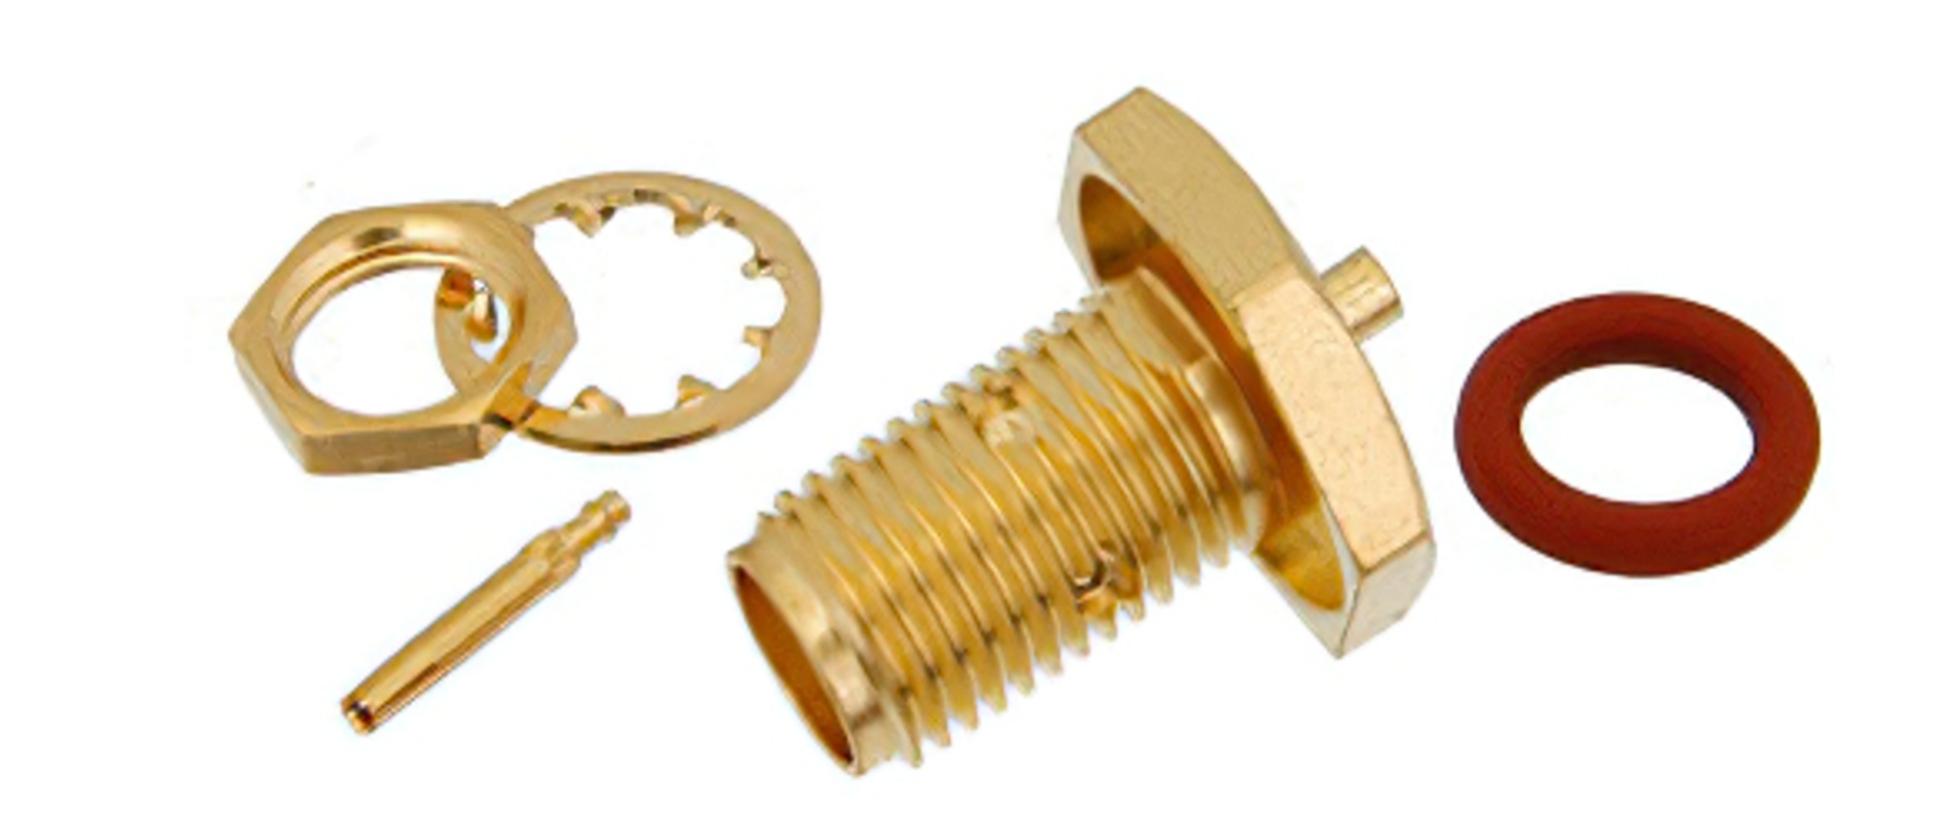

# RF Connectors Technical Data Sheet ET11488

# Configuration

- SMA Female Connector
- MIL-STD-348
- 50 Ohms
- Straight Body Geometry

- ET38351 Interface Type
- Solder/Solder Attachment
- Bulkhead

### Features

Gold Plated Contact

Contact plating according to MIL-G-45204

# Applications

General Purpose Test

Rack and Panel Mount Applications

Custom Cable Assemblies

### Description

Ebeestock's ET11488 SMA female bulkhead mount connector solder attachment for ET38351, .235 inch D hole is part of our full line of RF components available for same-day shipping. This SMA bulkhead connector allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Our SMA female bulkhead connector ET11488 datasheet specifications and drawing with dimensions are shown below in this PDF. Ebeestock's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Ebeestock has the right connector for the job. Ebeestock can also expertly build your custom cable connector assemblies for you and ship same-day.

### Mechanical Specifications

Size

 Length
 0.592 in [15.04 mm]

 Width/Dia.
 0.438 in [11.13 mm]

 Weight
 0.009 lbs [4.08 g]

### Material Specifications


| Description | Material | Plating             |
|-------------|----------|---------------------|
| Contact     |          | Gold<br>MIL-G-45204 |
| Insulation  | PTFE     |                     |
| Body        | Brass    | Gold<br>MIL-G-45204 |
|             |          |                     |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Female Bulkhead Mount Connector Solder Attachment for ET38351, .235 inch D Hole ET11488

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



SMA Female Bulkhead Mount Connector Solder Attachment for ET 38351, .235 inch D Hole

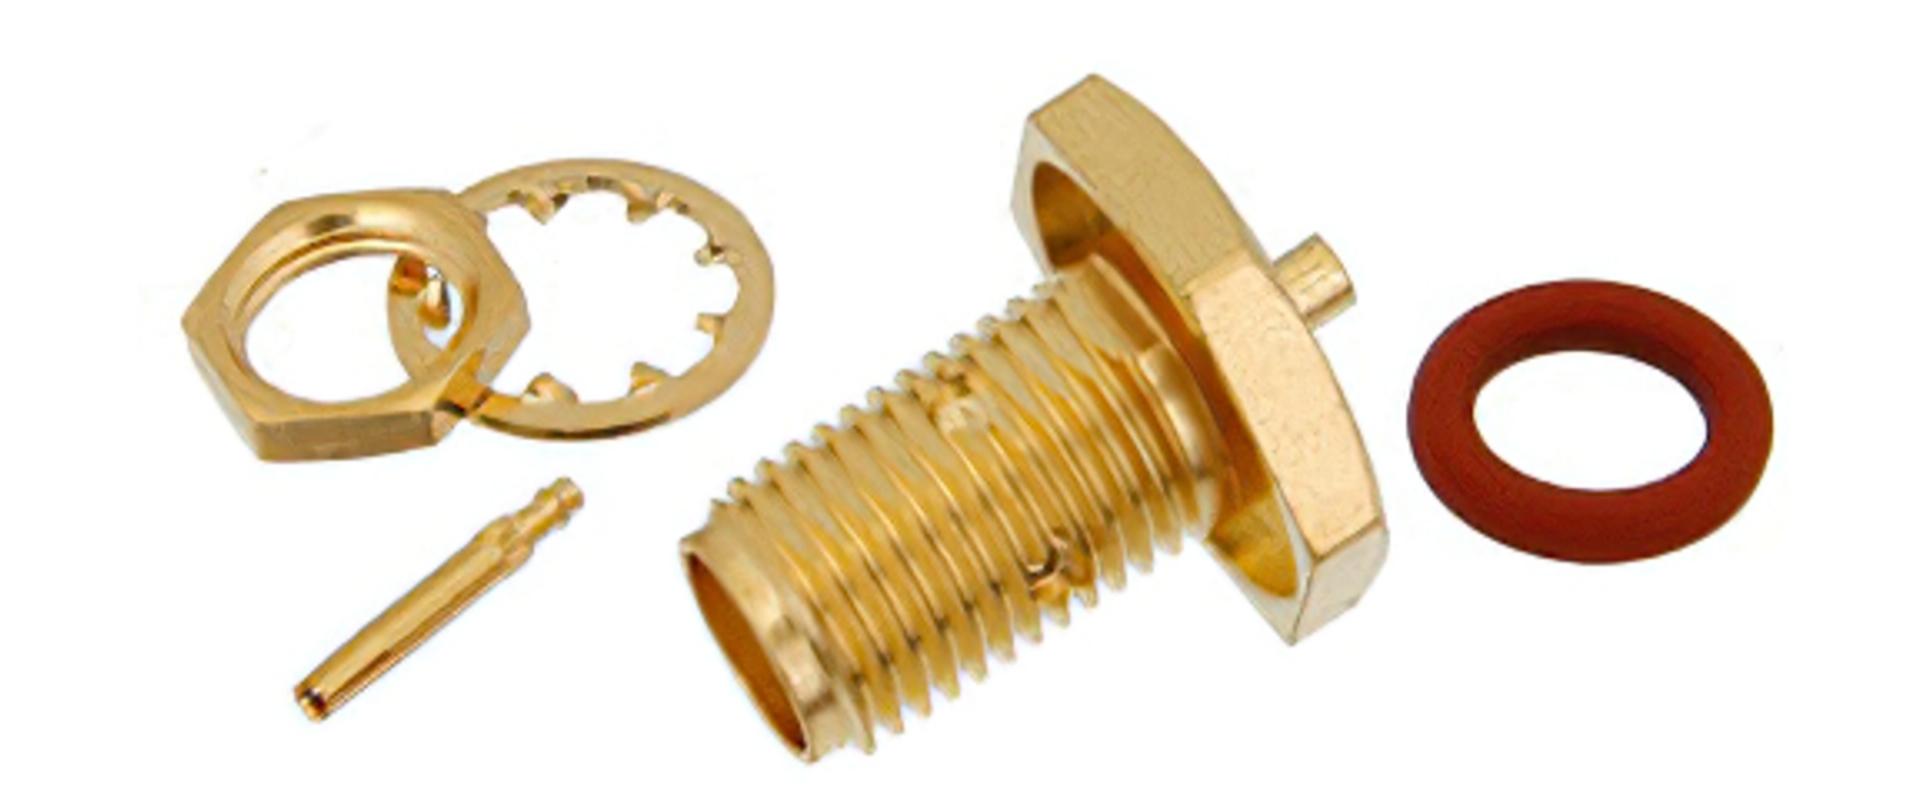

# RF Connectors Technical Data Sheet ET11488

# **Environmental Specifications**

Temperature

Operating Range

-65 to +165 deg C

Compliance Certifications (see product page for current document)

### Plotted and Other Data

Notes:


SMA Female Bulkhead Mount Connector Solder Attachment for ET38351, .235 inch D Hole from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Female Bulkhead Mount Connector Solder Attachment for ET38351, .235 inch D Hole ET11488

**URL:** https://www.ebeestock.com/sma-female-bulkhead-mount-connector-solder-attachment-for-pe-034 sr-235-inch-d-hole-0011488

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.

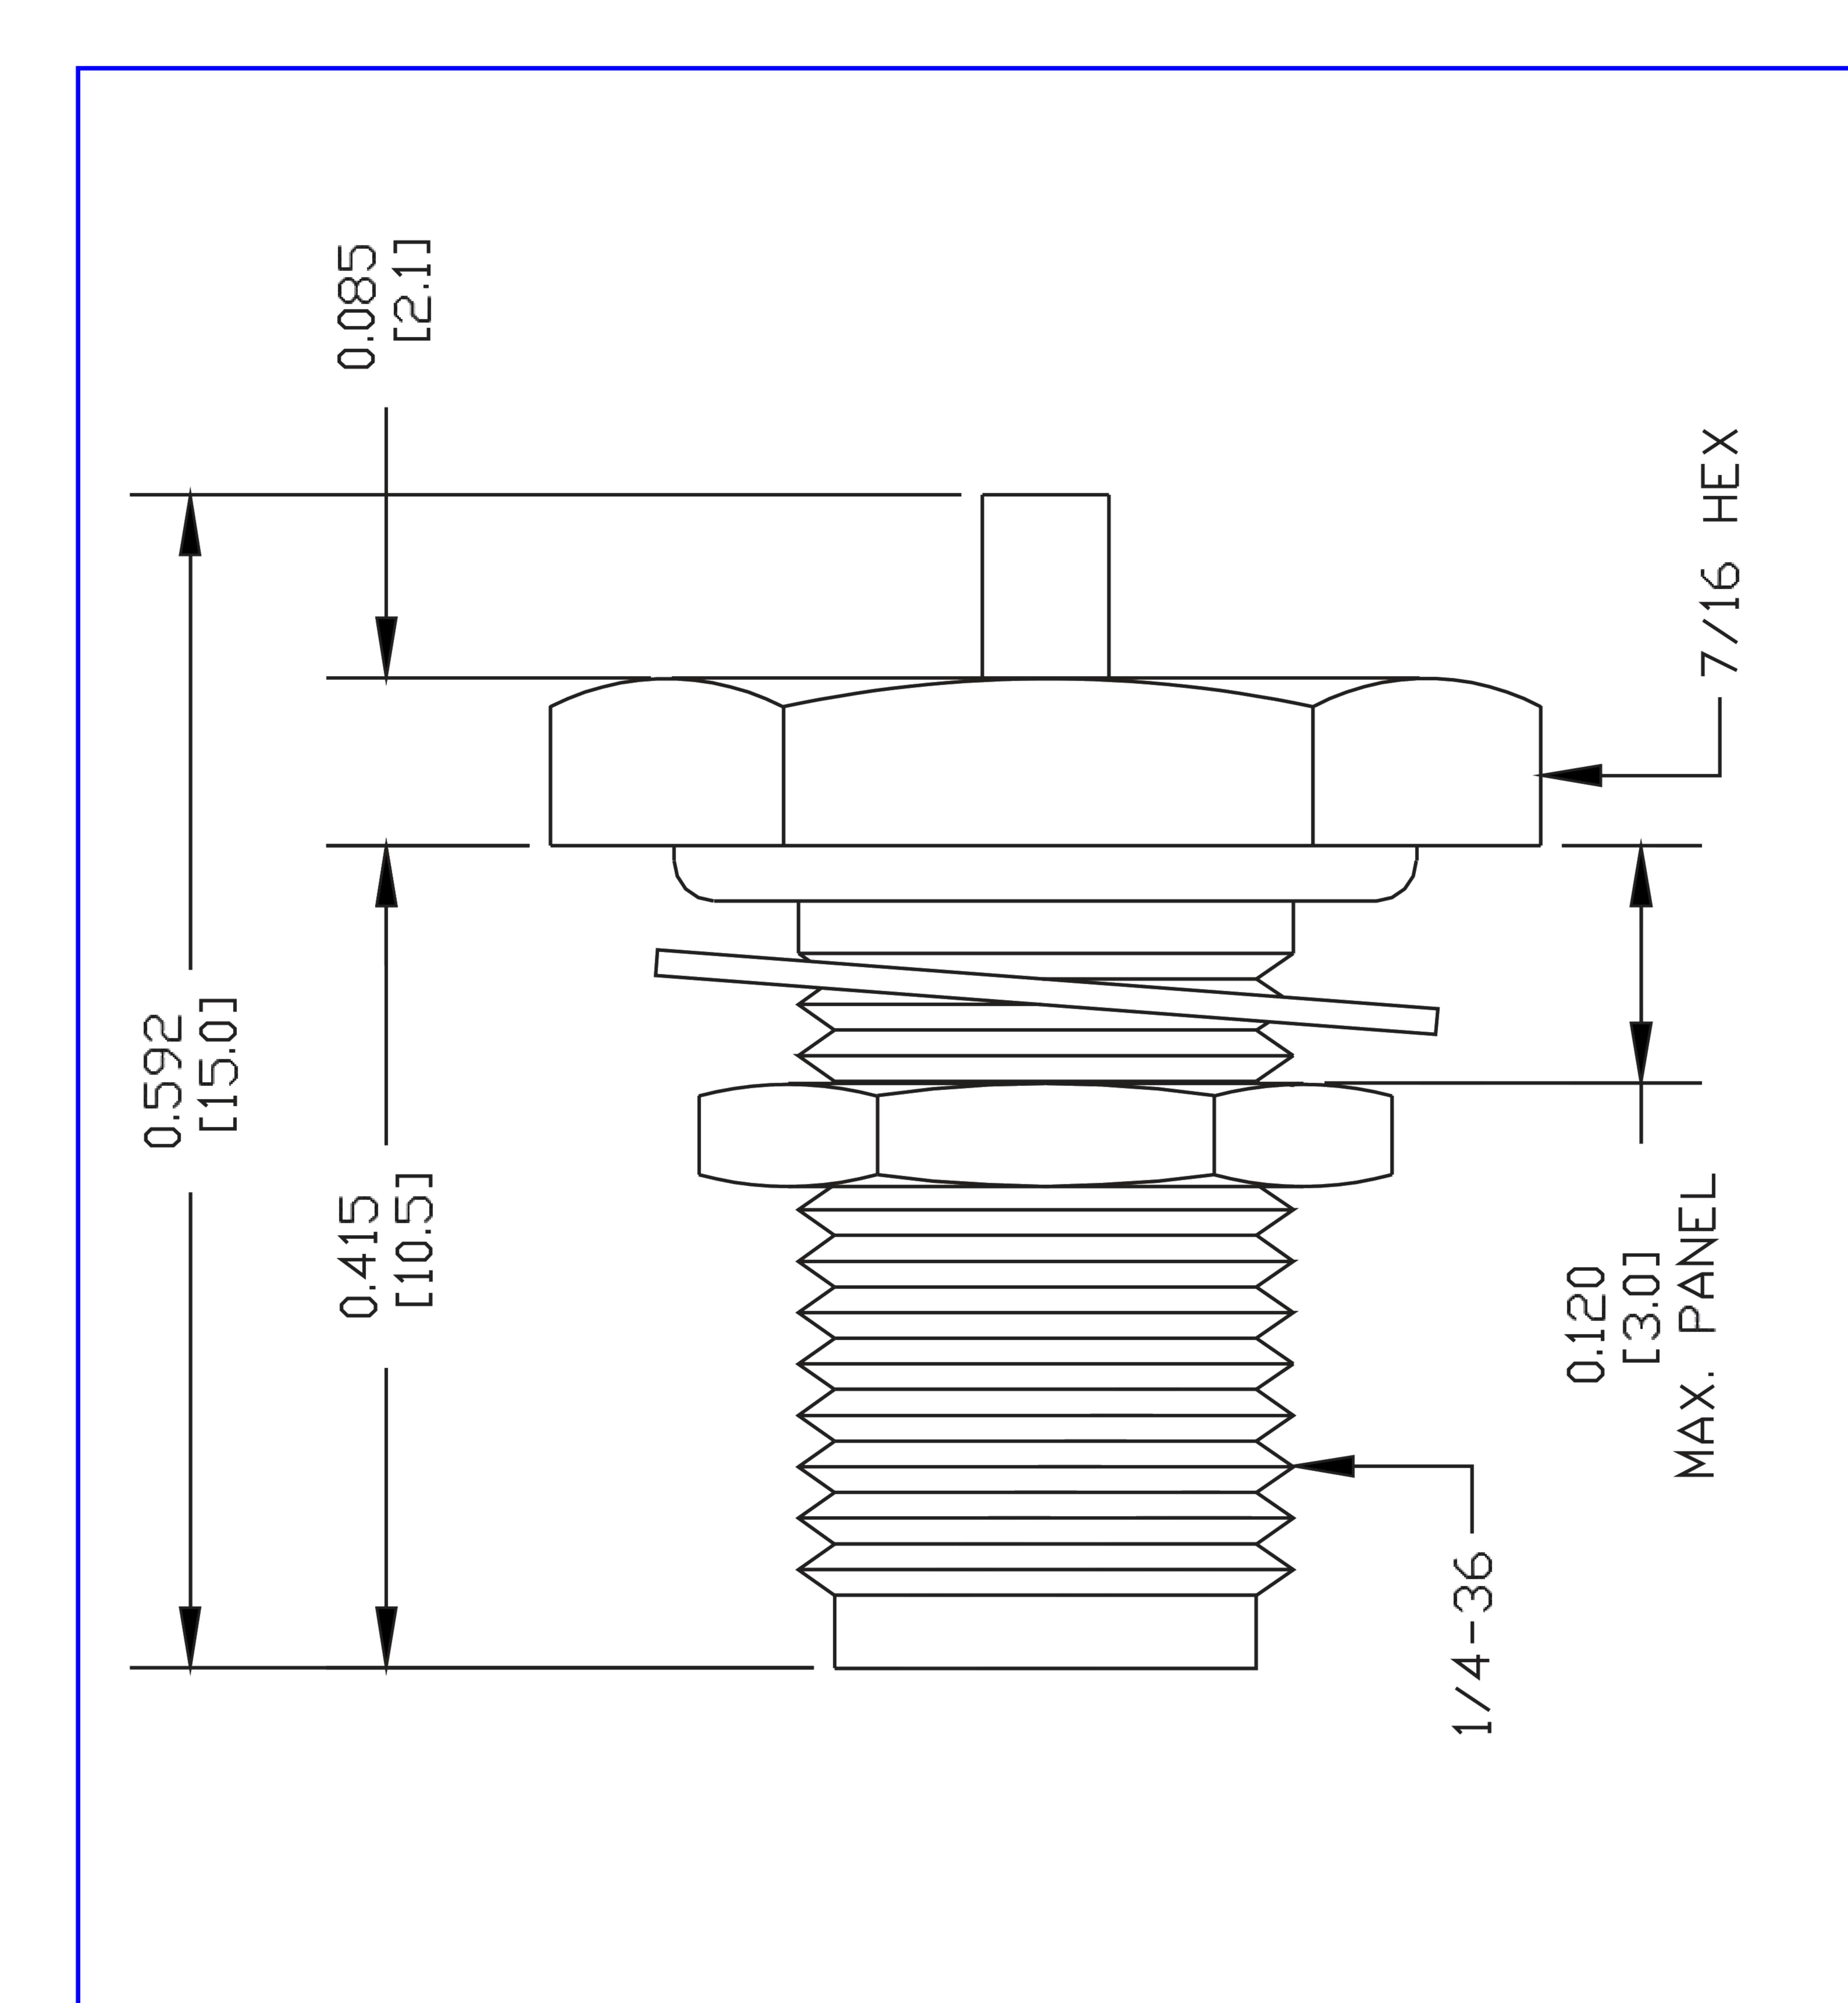

# NNC SINKER

# ASSEMBLY PROCEDURES

- STRIP CABLE AS SHOWN. DO NOT NICK CENTER CONDUCTOR. SLIDE CABLE THROUG
- INSERT CENTER CONDUCTOR INTOCONTAC
  UNTIL DIELECTRIC BOTTOMS TO CENTER
  CONDUCTOR. DO NOT OVER HEAT
  DIELECTRIC.
- USING "PIN" END OF ASSEMBLY TOOL, PRES CONTACT FULLY INTO INSULATOR. SOLDER OUTER CONDUCTOR TO BODY.



| DWG TITLE      | NOTES: 1. UNLESS OTHERWISE SPECIFIED A   | ALL DIMENSIONS ARE NO       | MINAL.          |         |
|----------------|--|-----------------------------|-----------------|---------|
|                | 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE 3. DIMENSIONS ARE IN INCHES [mm]. 4. FITS MIL-C-17 AND EQUIVALENT CABLES. | CT TO CHANGE WITHOUS ABLES. | T NOTICE AT ANY | N TIME. |
|                |  |                             |                 |         |
| FSCM NO. 53919 | <b>CAD FILE</b> 022908   | SCALE N/A                   | SIZE A          | XXX     |
|                |  |                             |                 |         |