

SMA Female Bulkhead Mount Connector Solder Attachment for ET 38350, .235 inch D Hole



RF Connectors Technical Data Sheet ET11489

Configuration

- SMA Female Connector
- MIL-STD-348
- 50 Ohms
- Straight Body Geometry

- ET38350 Interface Type
- Solder/Solder Attachment
- Bulkhead

Features

Gold Plated Contact

Contact plating according to MIL-G-45204

Applications

General Purpose Test

- Rack and Panel Mount Applications
- Custom Cable Assemblies

Description

Ebeestock's ET11489 SMA female bulkhead mount connector solder attachment for ET38350, .235 inch D hole is part of our full line of RF components available for same-day shipping. This SMA bulkhead connector allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Our SMA female bulkhead connector ET11489 datasheet specifications and drawing with dimensions are shown below in this PDF. Ebeestock's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Ebeestock has the right connector for the job. Ebeestock can also expertly build your custom cable connector assemblies for you and ship same-day.

Mechanical Specifications

Size

 Length
 0.592 in [15.04 mm]

 Width/Dia.
 0.438 in [11.13 mm]

 Weight
 0.006 lbs [2.72 g]

Material Specifications

Description	Material	Plating
Contact		Gold MIL-G-45204
Insulation	PTFE	
Body	Brass	Gold MIL-G-45204

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Female Bulkhead Mount Connector Solder Attachment for ET38350, .235 inch D Hole ET11489

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



SMA Female Bulkhead Mount Connector Solder Attachment for ET 38350, .235 inch D Hole



RF Connectors Technical Data Sheet ET11489

Environmental Specifications

Temperature

Operating Range

-65 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:


SMA Female Bulkhead Mount Connector Solder Attachment for ET38350, .235 inch D Hole from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Female Bulkhead Mount Connector Solder Attachment for ET38350, .235 inch D Hole ET11489

URL: https://www.ebeestock.com/sma-female-bulkhead-mount-connector-solder-attachment-for-pe-020 sr-235-inch-d-hole-0011489

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.

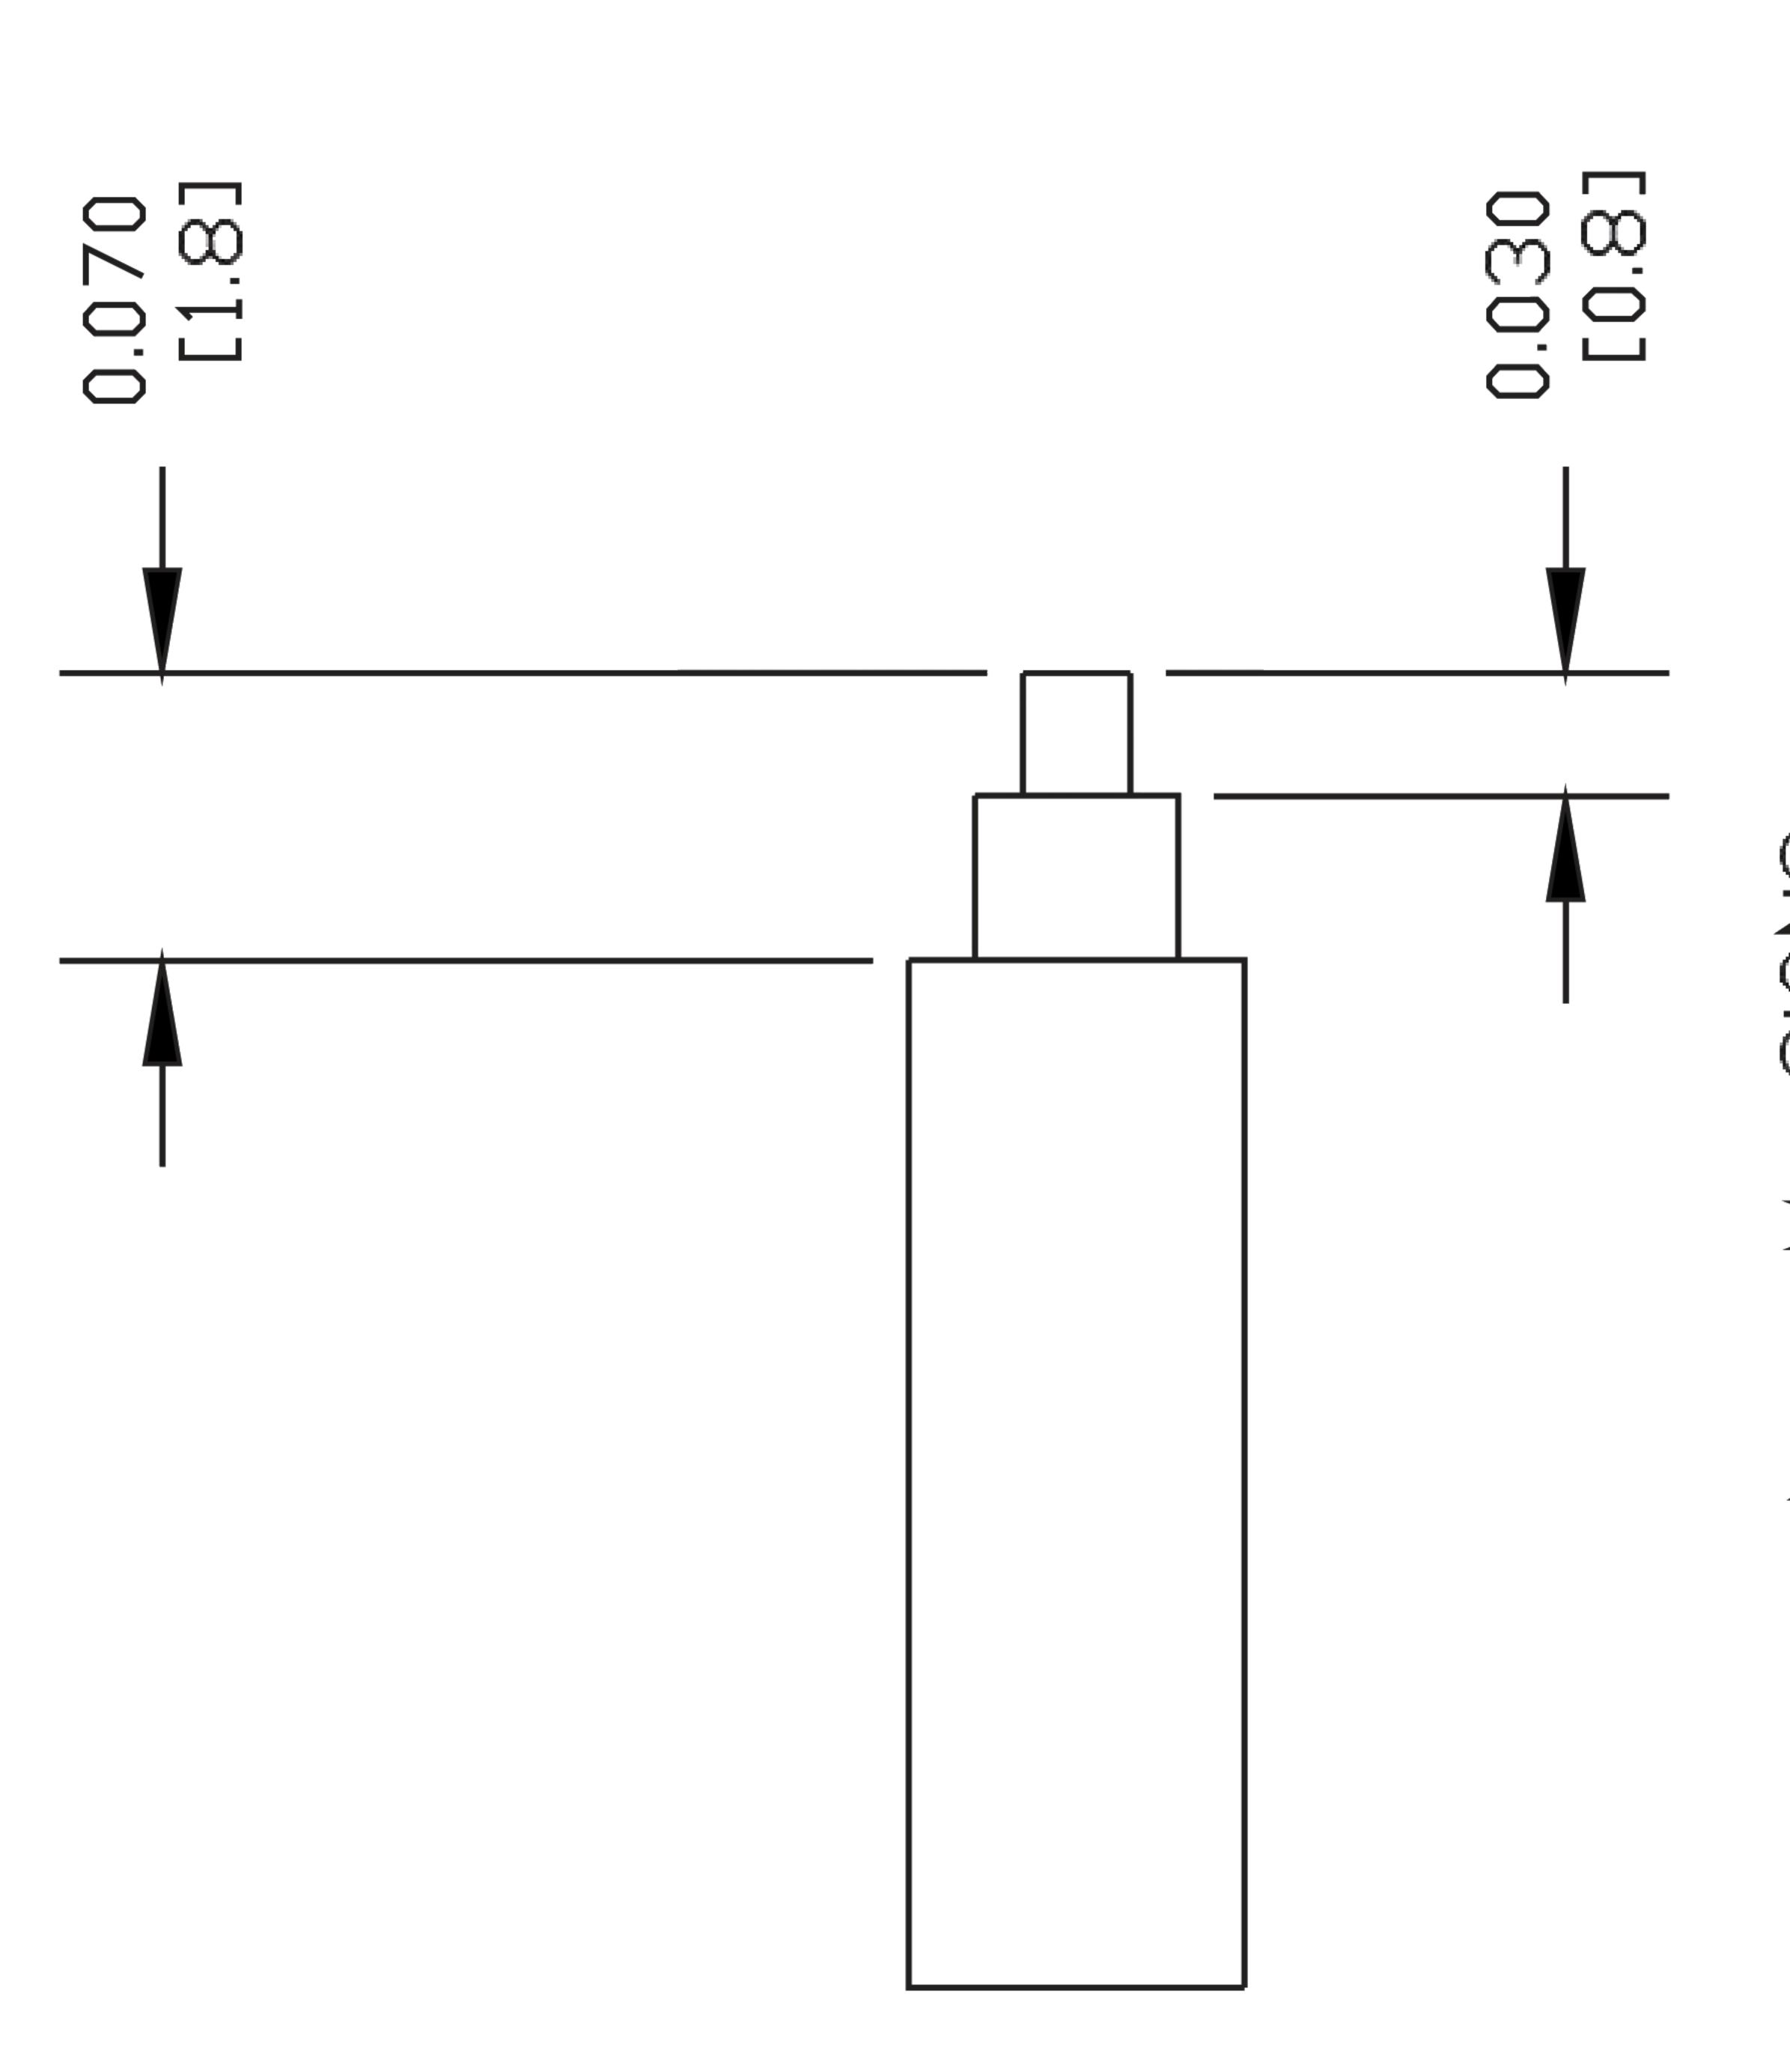


SIDNING DIMENSIONS

ASSEMBLY PROCEDURES

TRIP CABLE AS SHOWN. DO NOT NICK CENTE ONDUCTOR. SLIDE CABLE THROUGH BODY

INSERT CENTER CONDUCTOR INTO. CONTACT
UNTIL DIELECTRIC BOTTOMS INSIDE CONTACT.
SOFT SOLDER CONTACT TO CENTER CONDUCT

JSING ASSEMBLY TOOL, PRESS CONTACT FULLY NTO INSULATOR. SOLDER OUTER CONDUCTOR TA RODY

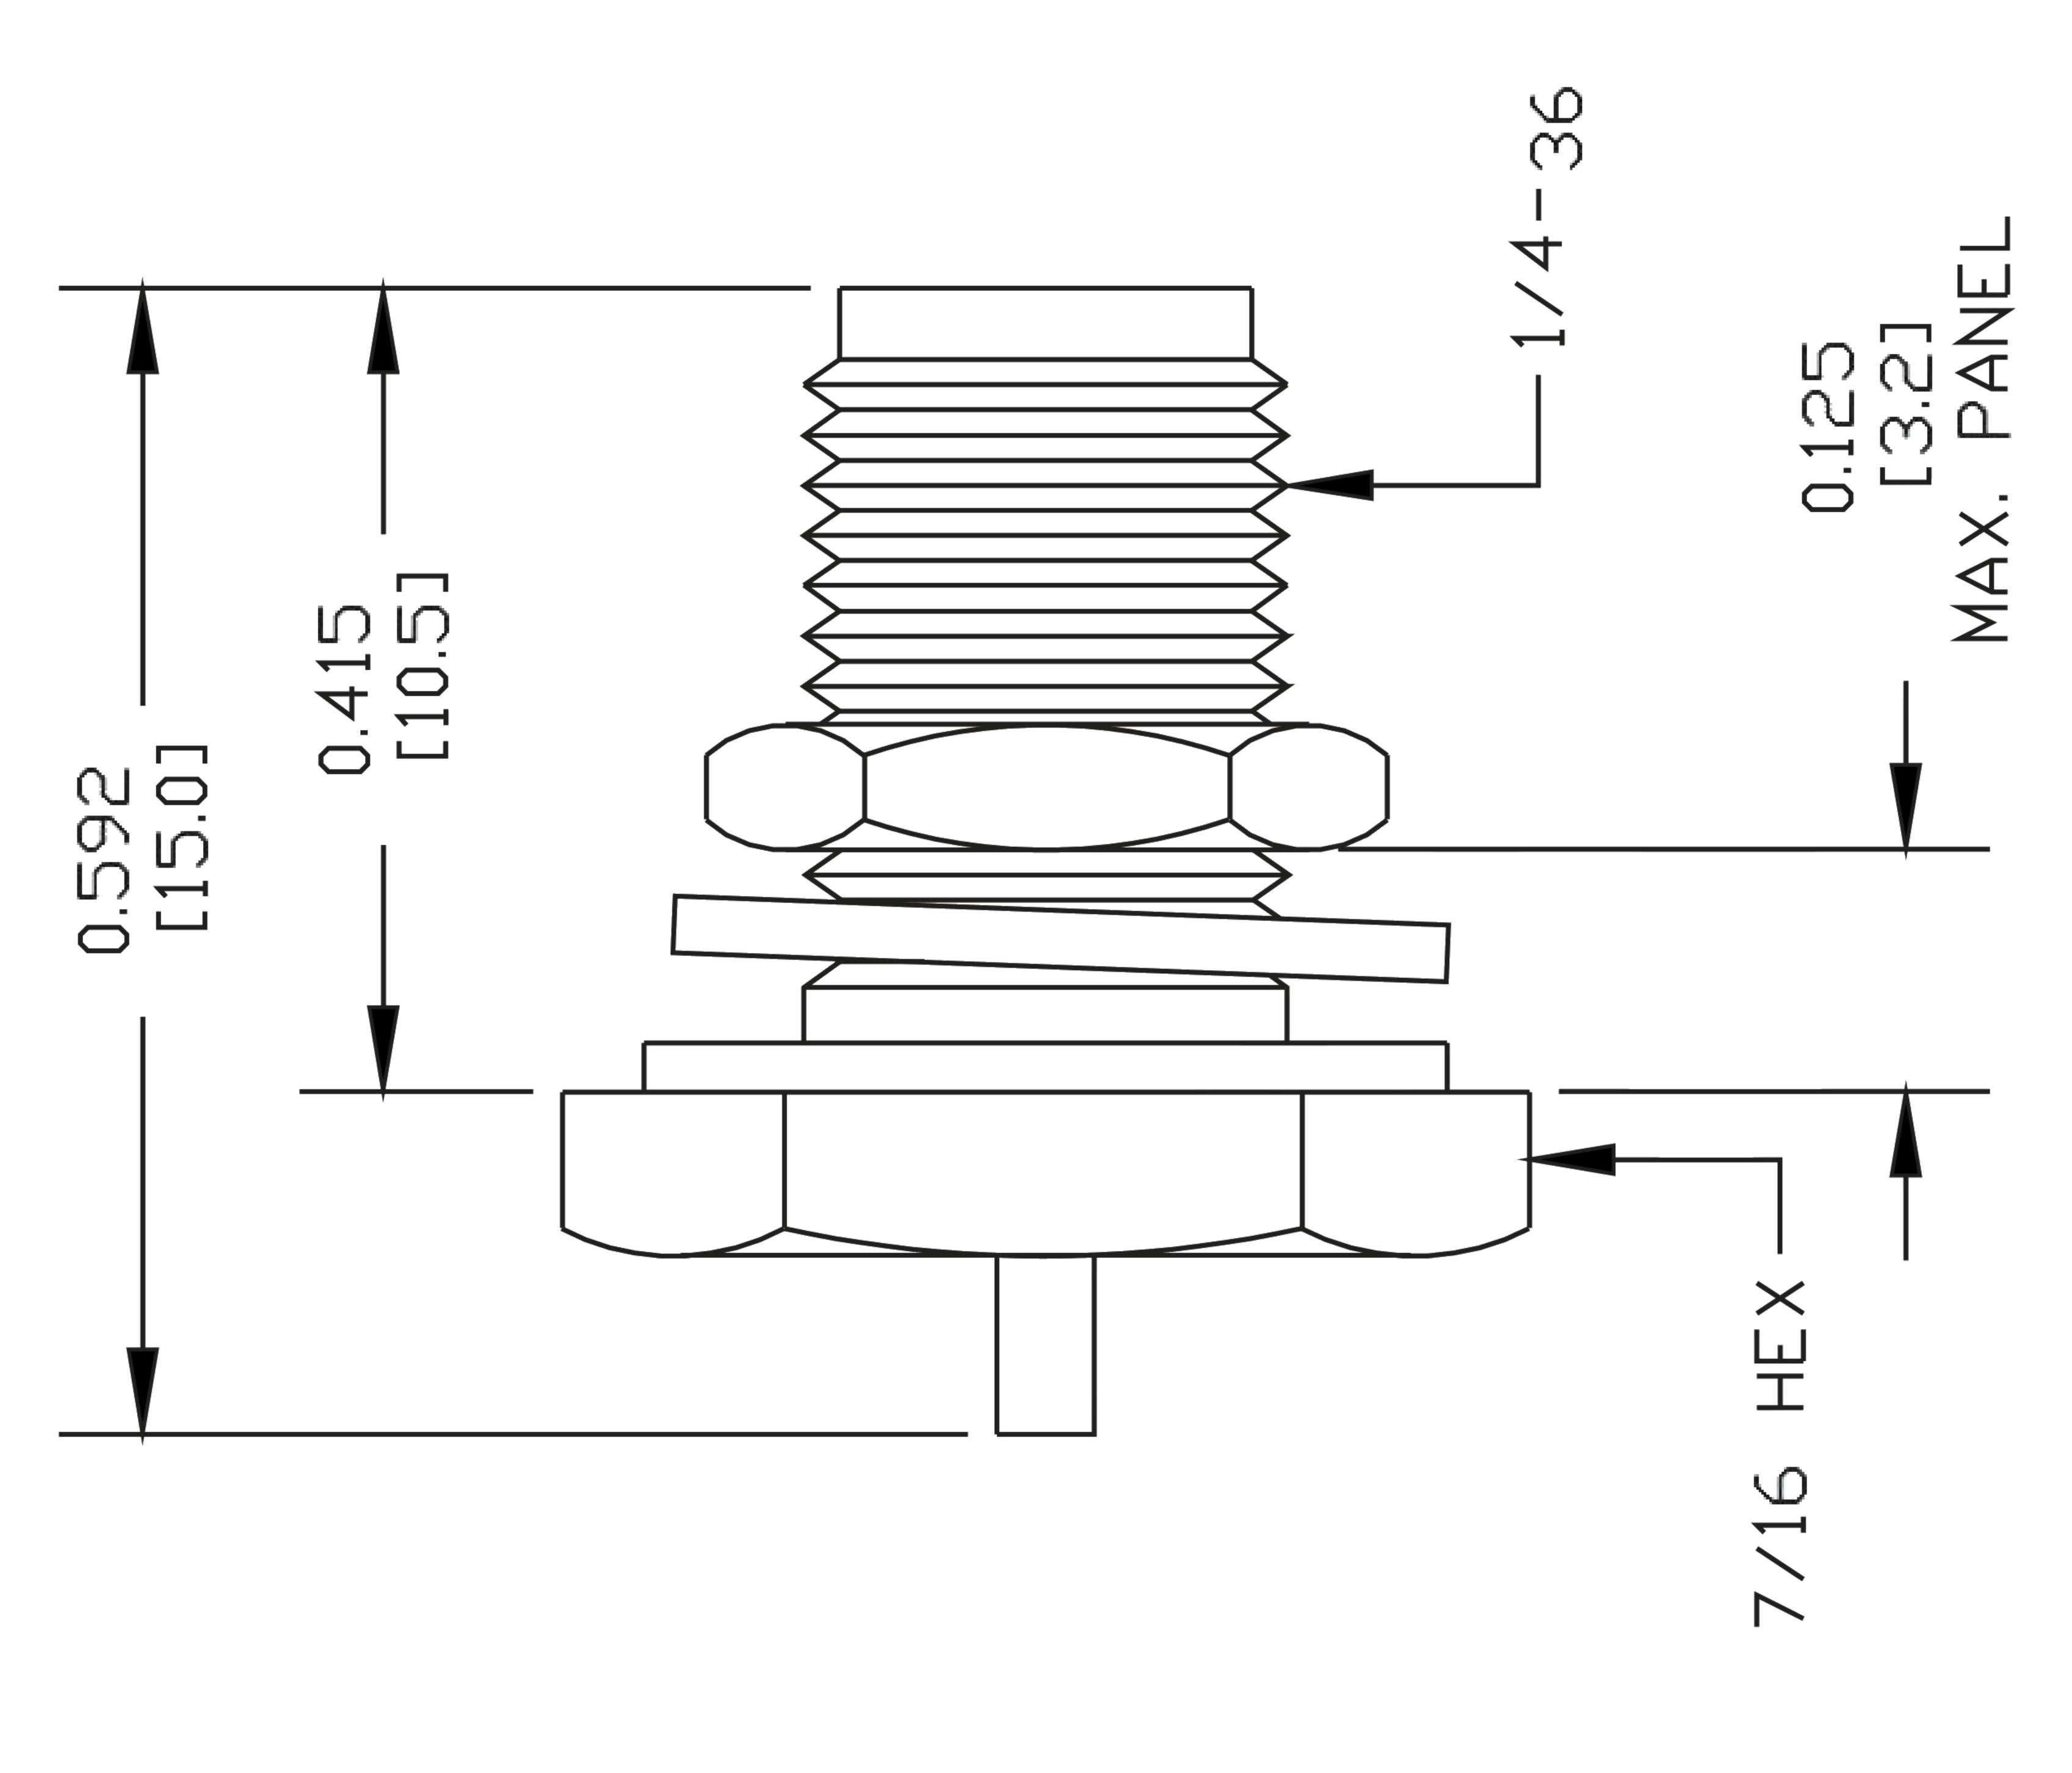

3. DIMENSIONS ARE IN INCHES [mm].
4. FITS MIL-C-17 AND EQUIVALENT CABLES.

NO. 53919 CAD FILE 061302 SCALE N/A

Ebeestock.com

8th Floor, Building 1, Yongfu Science
and Technology Center Industrial Park,
ha District 5, Humen,523900, Dongguan, Guangdong, Chebstie: www.ebeestock.con