

SMP Male Smooth Bore Connector Solder Attachment Surface Mount PCB, with 2 Ground Posts



RF Connectors Technical Data Sheet

ET11557

Configuration

- Smooth Bore SMP Male Connector
- 50 Ohms

Features

- Max. Operating Frequency 18 GHz
- Excellent VSWR of 1.15:1
- Gold Plated Beryllium Copper Contact

- Straight Body Geometry
- Connector Interface Types: Surface Mount
- Contact plating according to MIL-G-45204
- Blind Mate Connector

Applications

General Purpose Test

PCB Applications

Description

Ebeestock's ET11557 SMP male smooth bore connector with solder attachment for Surface Mount PCB is part of our full line of RF components available for same-day shipping. Our SMP male connector operates up to a maximum frequency of 18 GHz and offers excellent VSWR of 1.15:1. The Ebeestock blind mate connector is ideal for applications where direct visual or tactile access to the connection point is not possible, for example, when two circuit boards need to be mated.

Our SMP male connector ET11557 datasheet specifications and drawing with dimensions are shown below in this PDF. Ebeestock's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Ebeestock has the right connector for the job. Ebeestock can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
VSWR			1.15:1	
Insertion Loss			0.13	dB
Dielectric Withstanding Voltage (AC)			500	Vrms
High Potential Voltage			325	Vrms
@ 5 MHz				
Corona Discharge			125	Vrms
@ 70,000 feet				
Inner Conductor DC Resistance			6	mOhms
Outer Conductor DC Resistance			2	mOhms
Insulation Resistance	5,000			MOhms

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMP Male Smooth Bore Connector Solder Attachment Surface Mount PCB, with 2 Ground Posts ET11557

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



SMP Male Smooth Bore Connector Solder Attachment Surface Mount PCB, with 2 Ground Posts



RF Connectors Technical Data Sheet

ET11557

Mechanical Specifications

Size

 Length
 0.24 in [6.1 mm]

 Width/Dia.
 0.22 in [5.59 mm]

 Weight
 0.002 lbs [0.91 g]

Material Specifications

Description	Material	Plating
Contact	Beryllium Copper	Gold MIL-G-45204
Insulation	PAI	
Body	Beryllium Copper	Gold MIL-G-45204

Environmental Specifications

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:


SMP Male Smooth Bore Connector Solder Attachment Surface Mount PCB, with 2 Ground Posts from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMP Male Smooth Bore Connector Solder Attachment Surface Mount PCB, with 2 Ground Posts ET11557

URL: https://www.ebeestock.com/smp-male-smooth-bore-connector-solder-attachment-surface-mount-p cb-with-2-ground-posts-0011557

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.

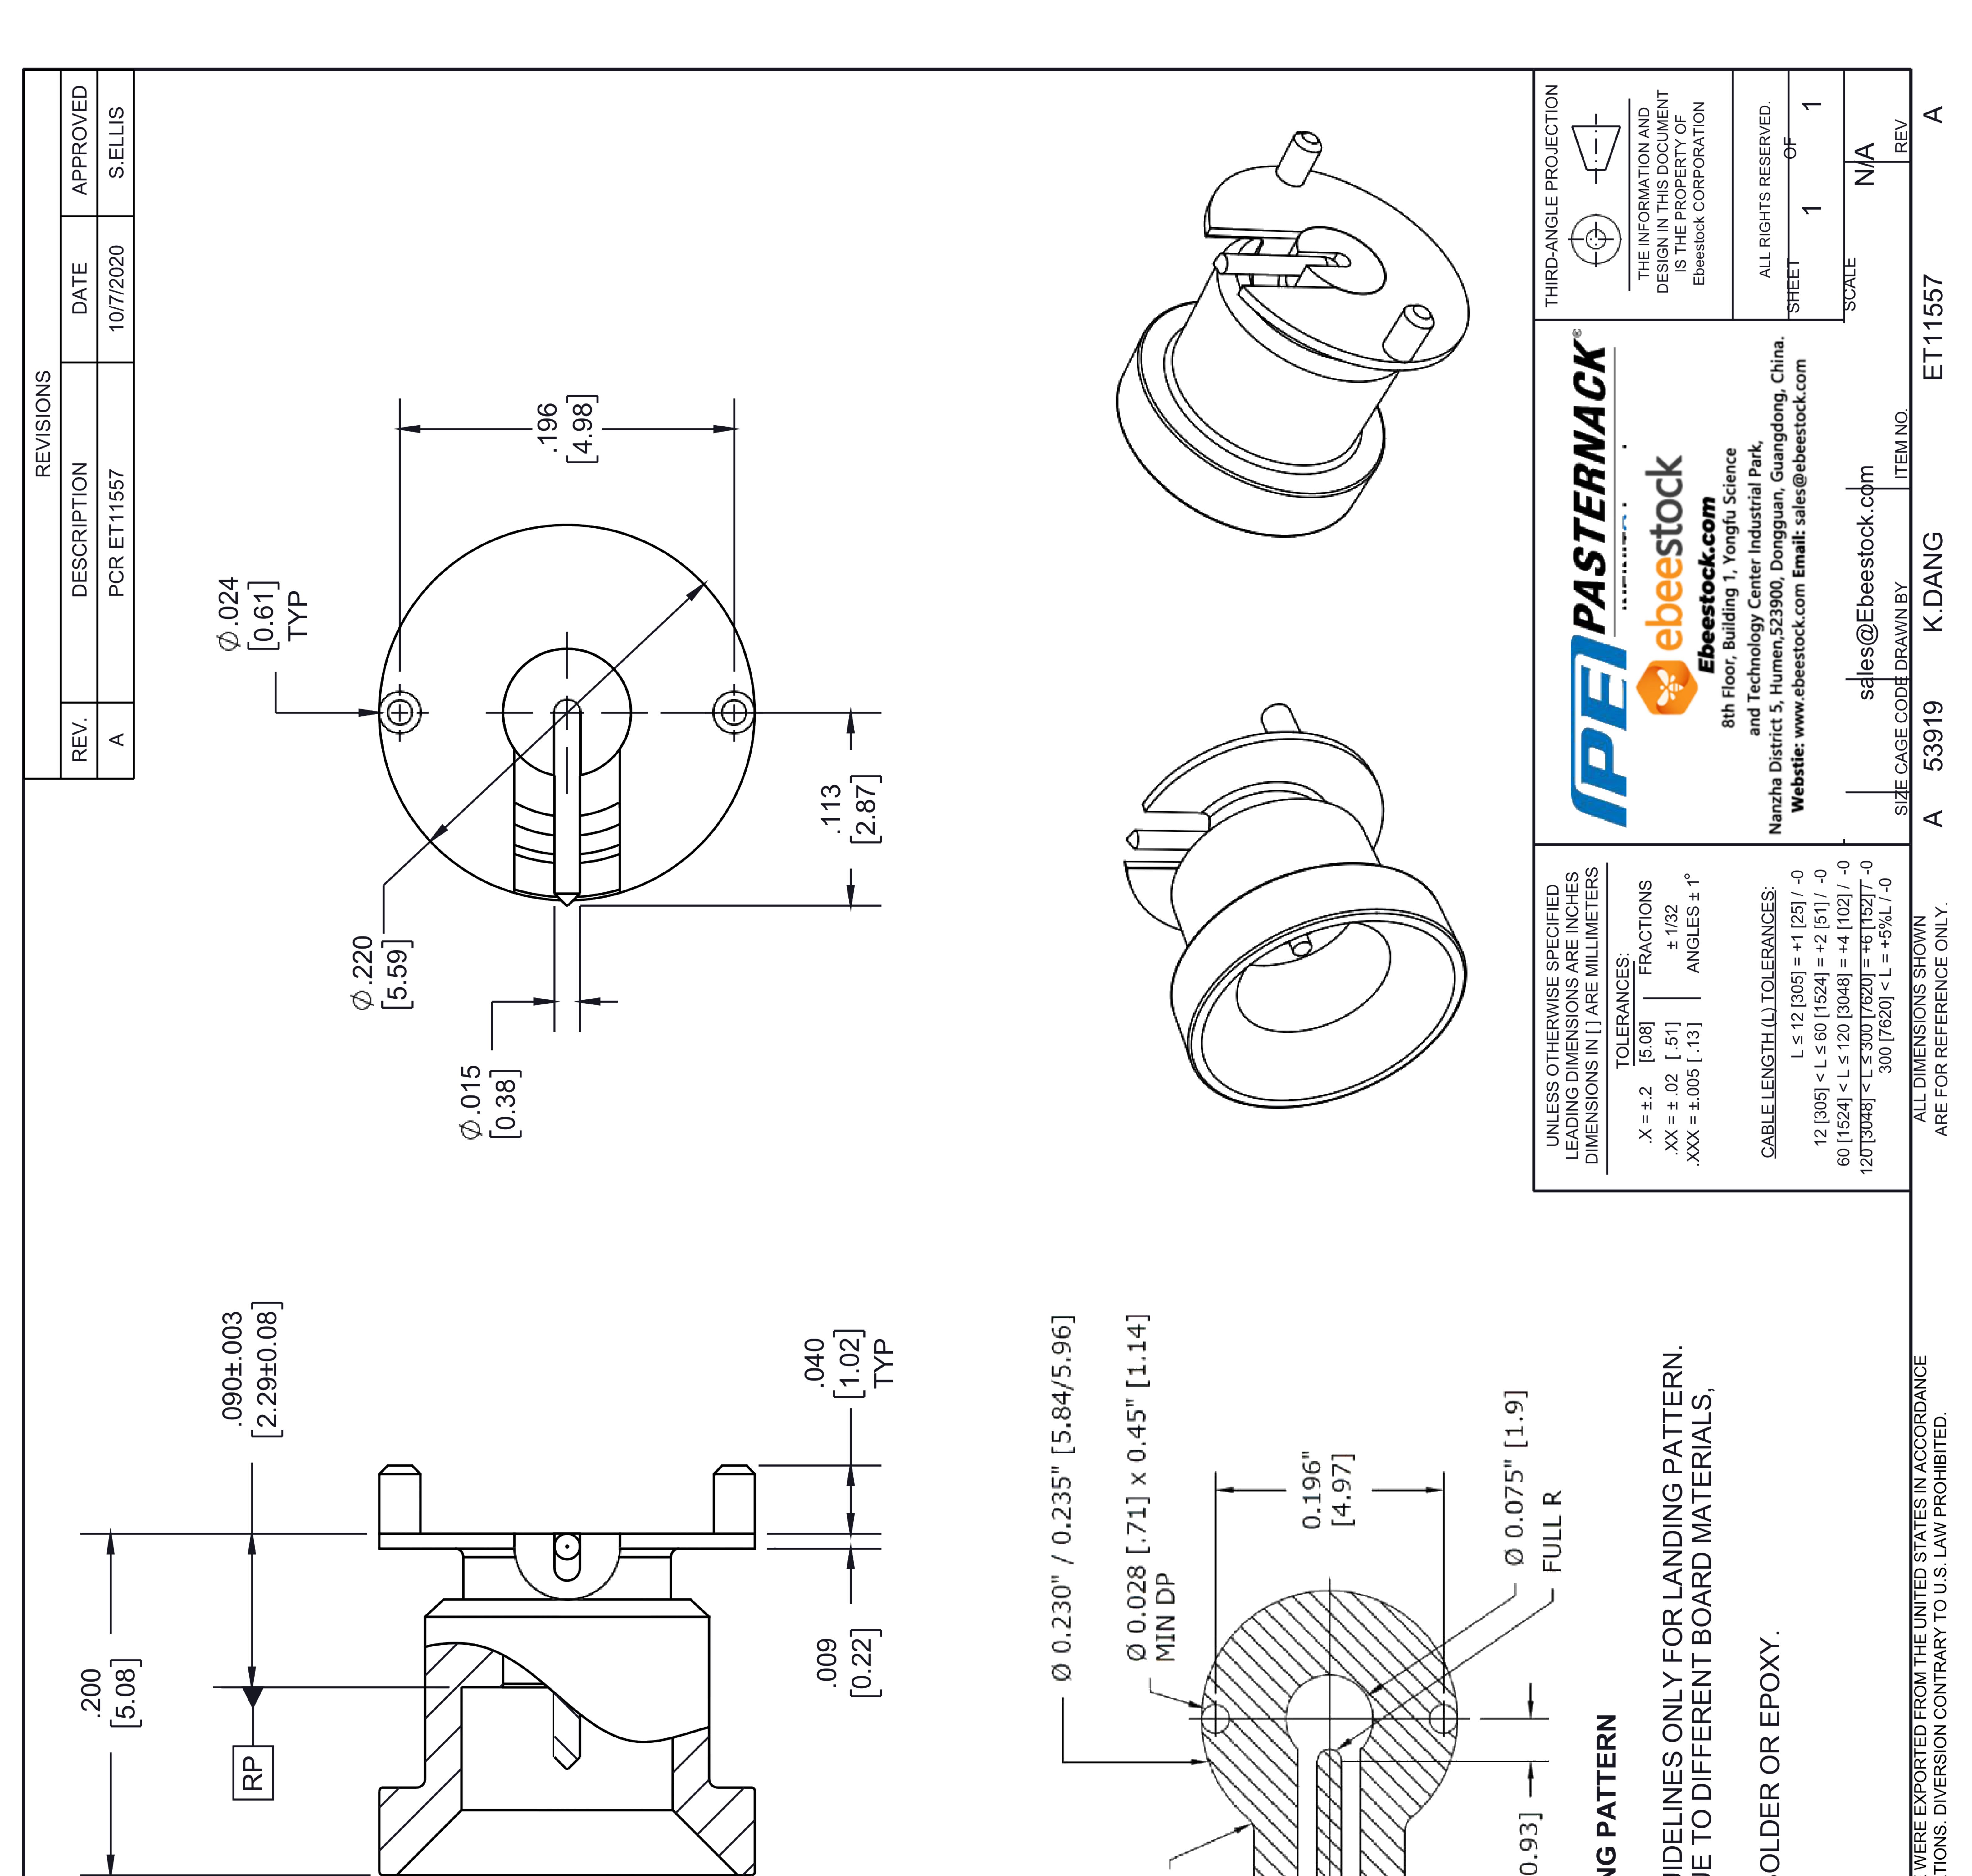

2MOOTH BORE

BJAM 9MS