

SSMA Female Connector Solder Attachment for ET38321, ET38322 , ET38322J, ET-RG405



RF Connectors Technical Data Sheet

ET11601

Configuration

- SSMA Female Connector
- MIL-STD-348
- 50 Ohms
- Straight Body Geometry

- ET38321, ET38322, ET38323, ET-RG405 Interface Type
- Solder/Solder Attachment

Features

- Max. Operating Frequency 26 GHz
- Gold Plated Beryllium Copper Contact

Contact plating according to MIL-G-45204

Applications

General Purpose Test

Custom Cable Assemblies

Description

Ebeestock's ET11601 SSMA female connector with solder/solder attachment for ET38321, ET38322, ET38323 and ET-RG405 is part of our full line of RF components available for same-day shipping. Our SSMA female connector operates up to a maximum frequency of 26 GHz.

Our SSMA female connector ET11601 datasheet specifications and drawing with dimensions are shown below in this PDF. Ebeestock's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Ebeestock has the right connector for the job. Ebeestock can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		26	GHz
Dielectric Withstanding Voltage (AC)			750	Vrms
Insulation Resistance	5,000			MOhms

Mechanical Specifications

Size

 Length
 0.5 in [12.7 mm]

 Width/Dia.
 0.187 in [4.75 mm]

 Weight
 0.004 lbs [1.81 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SSMA Female Connector Solder Attachment for ET38321, ET38322, ET38323, ET-RG405 ET11601

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



SSMA Female Connector Solder Attachment for ET38321, ET38322, ET-RG405



RF Connectors Technical Data Sheet

ET11601

Material Specifications

Description	Material	Plating
Contact	Beryllium Copper	Gold MIL-G-45204
Insulation	PTFE	
Body	Brass	Gold MIL-G-45204

Environmental Specifications

Temperature

Operating Range

-65 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data


Notes:


SSMA Female Connector Solder Attachment for ET38321, ET38322, ET38323, ET-RG405 from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SSMA Female Connector Solder Attachment for ET38321, ET38322, ET38323, ET-RG405 ET11601

URL: https://www.ebeestock.com/ssma-female-connector-solder-attachment-for-pe-sr405al-pe-sr405f l-pe-sr405flj-rg405-0011601

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

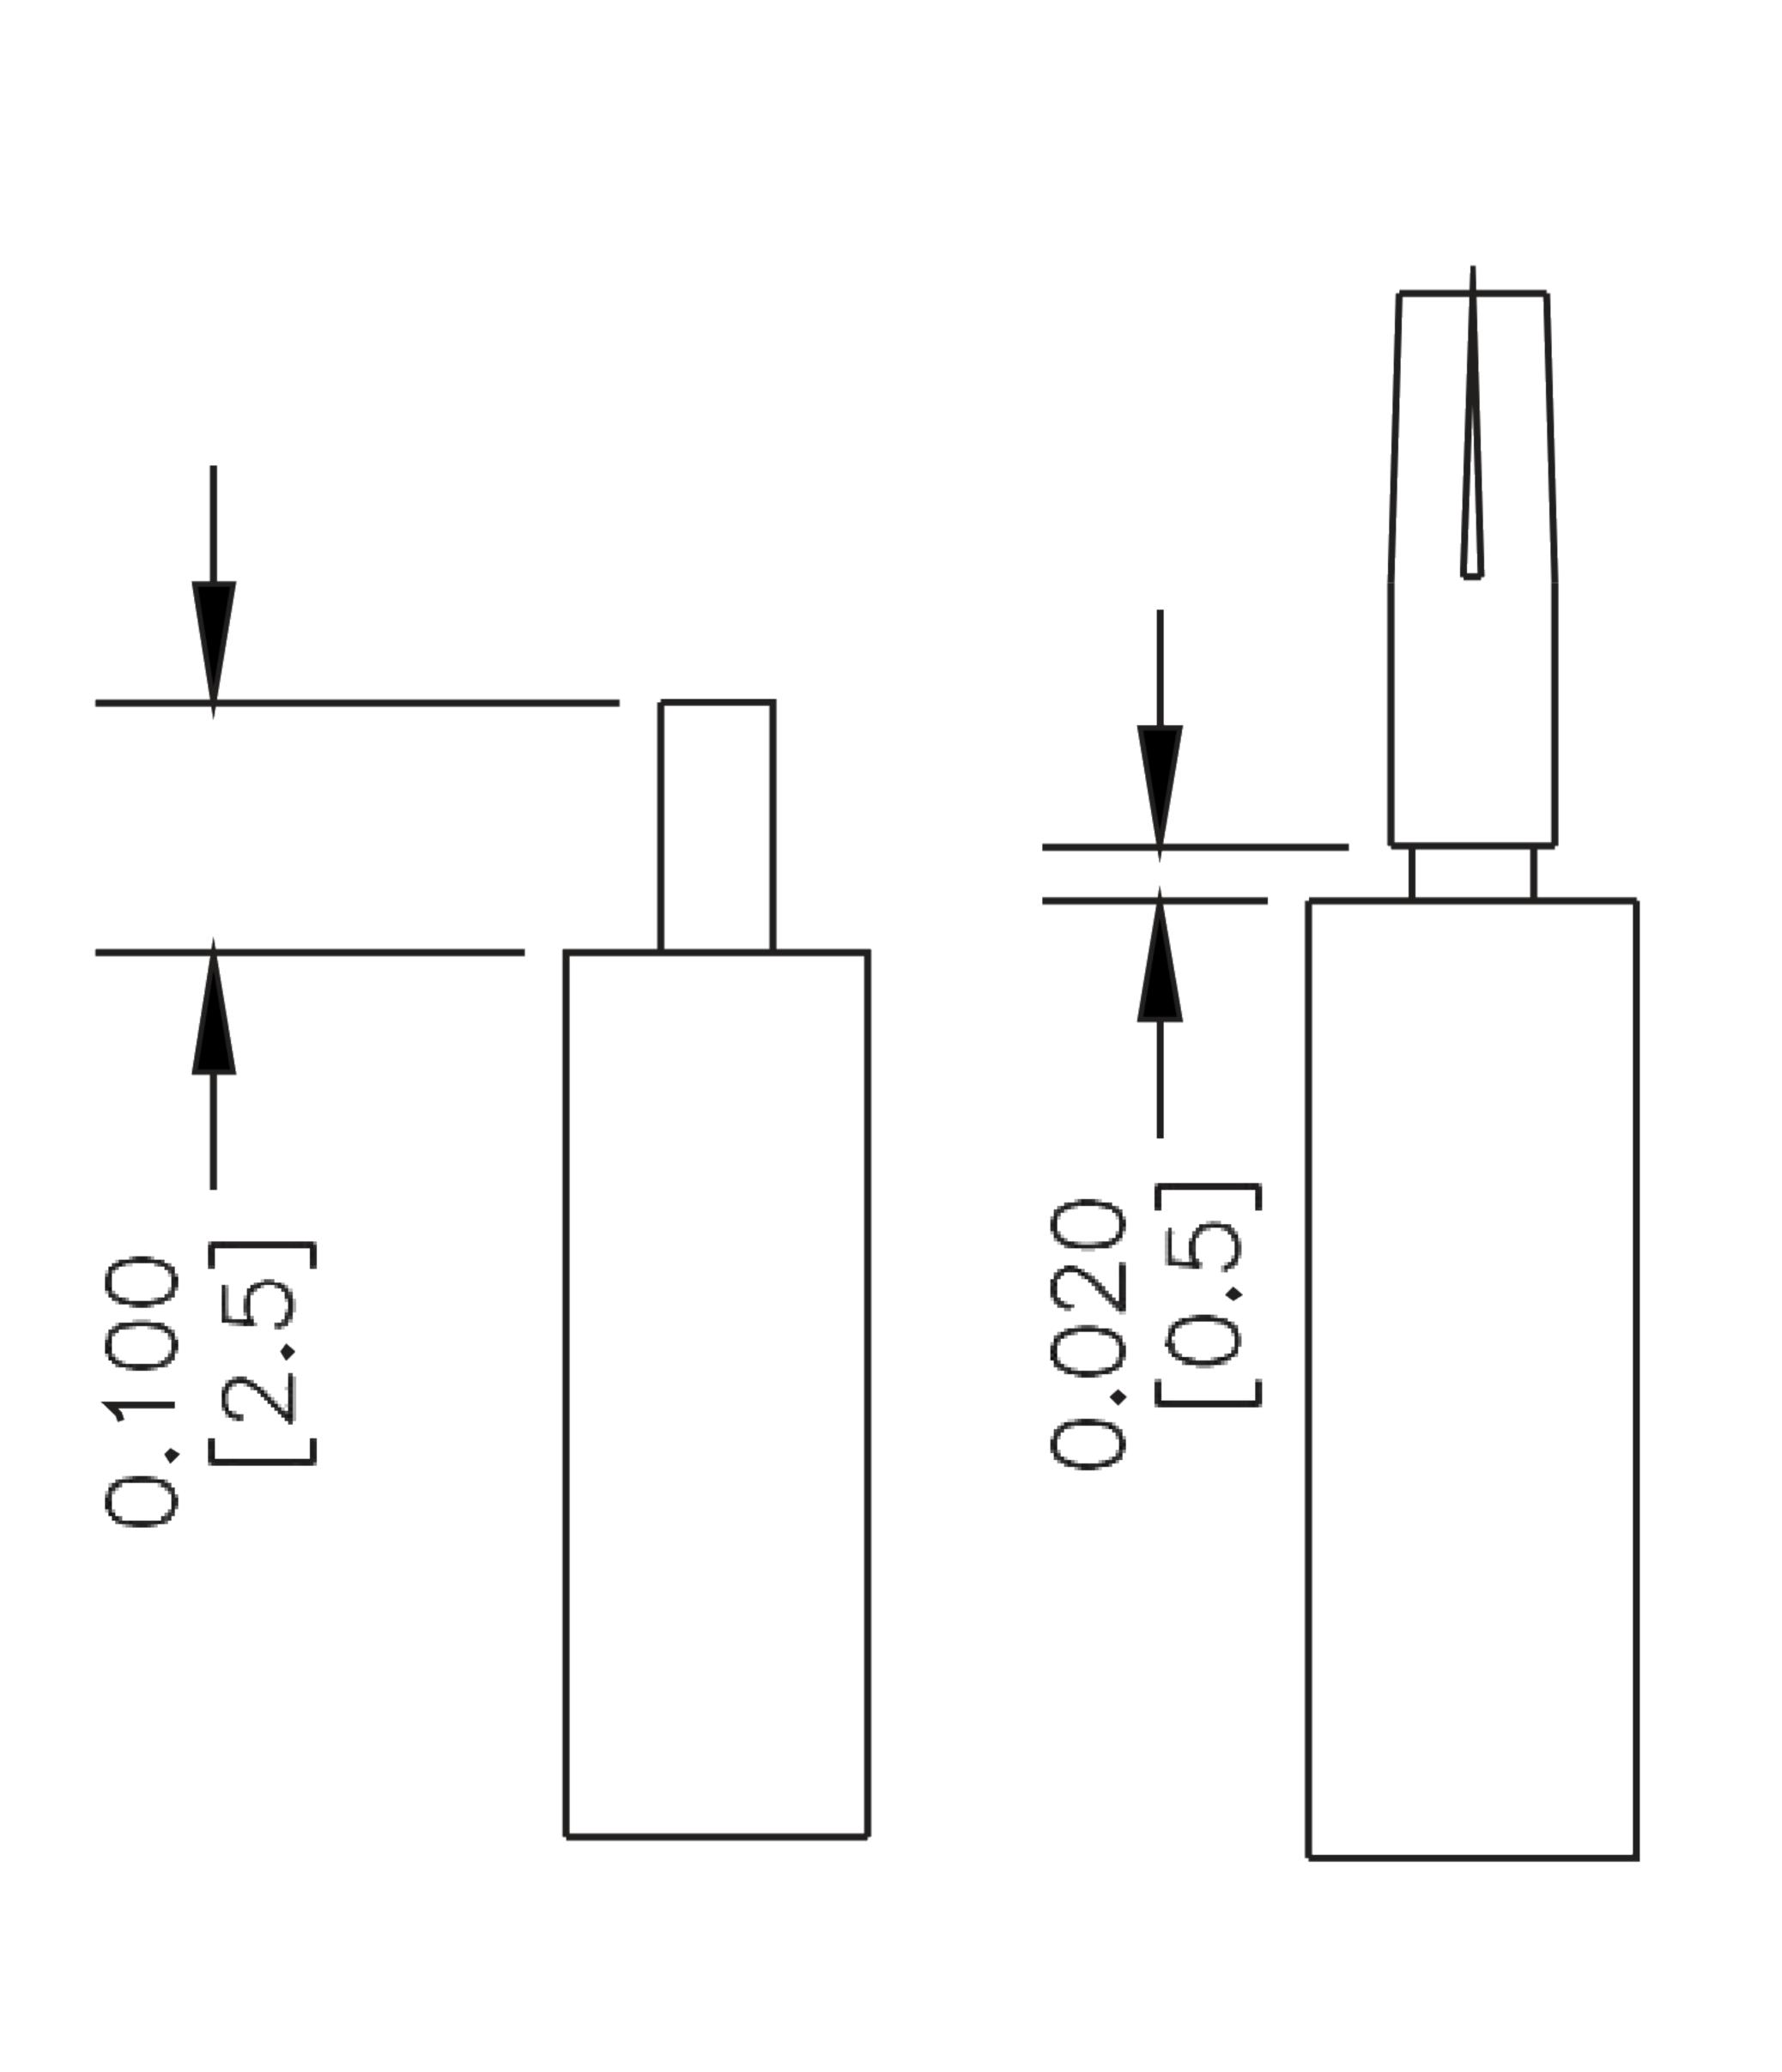

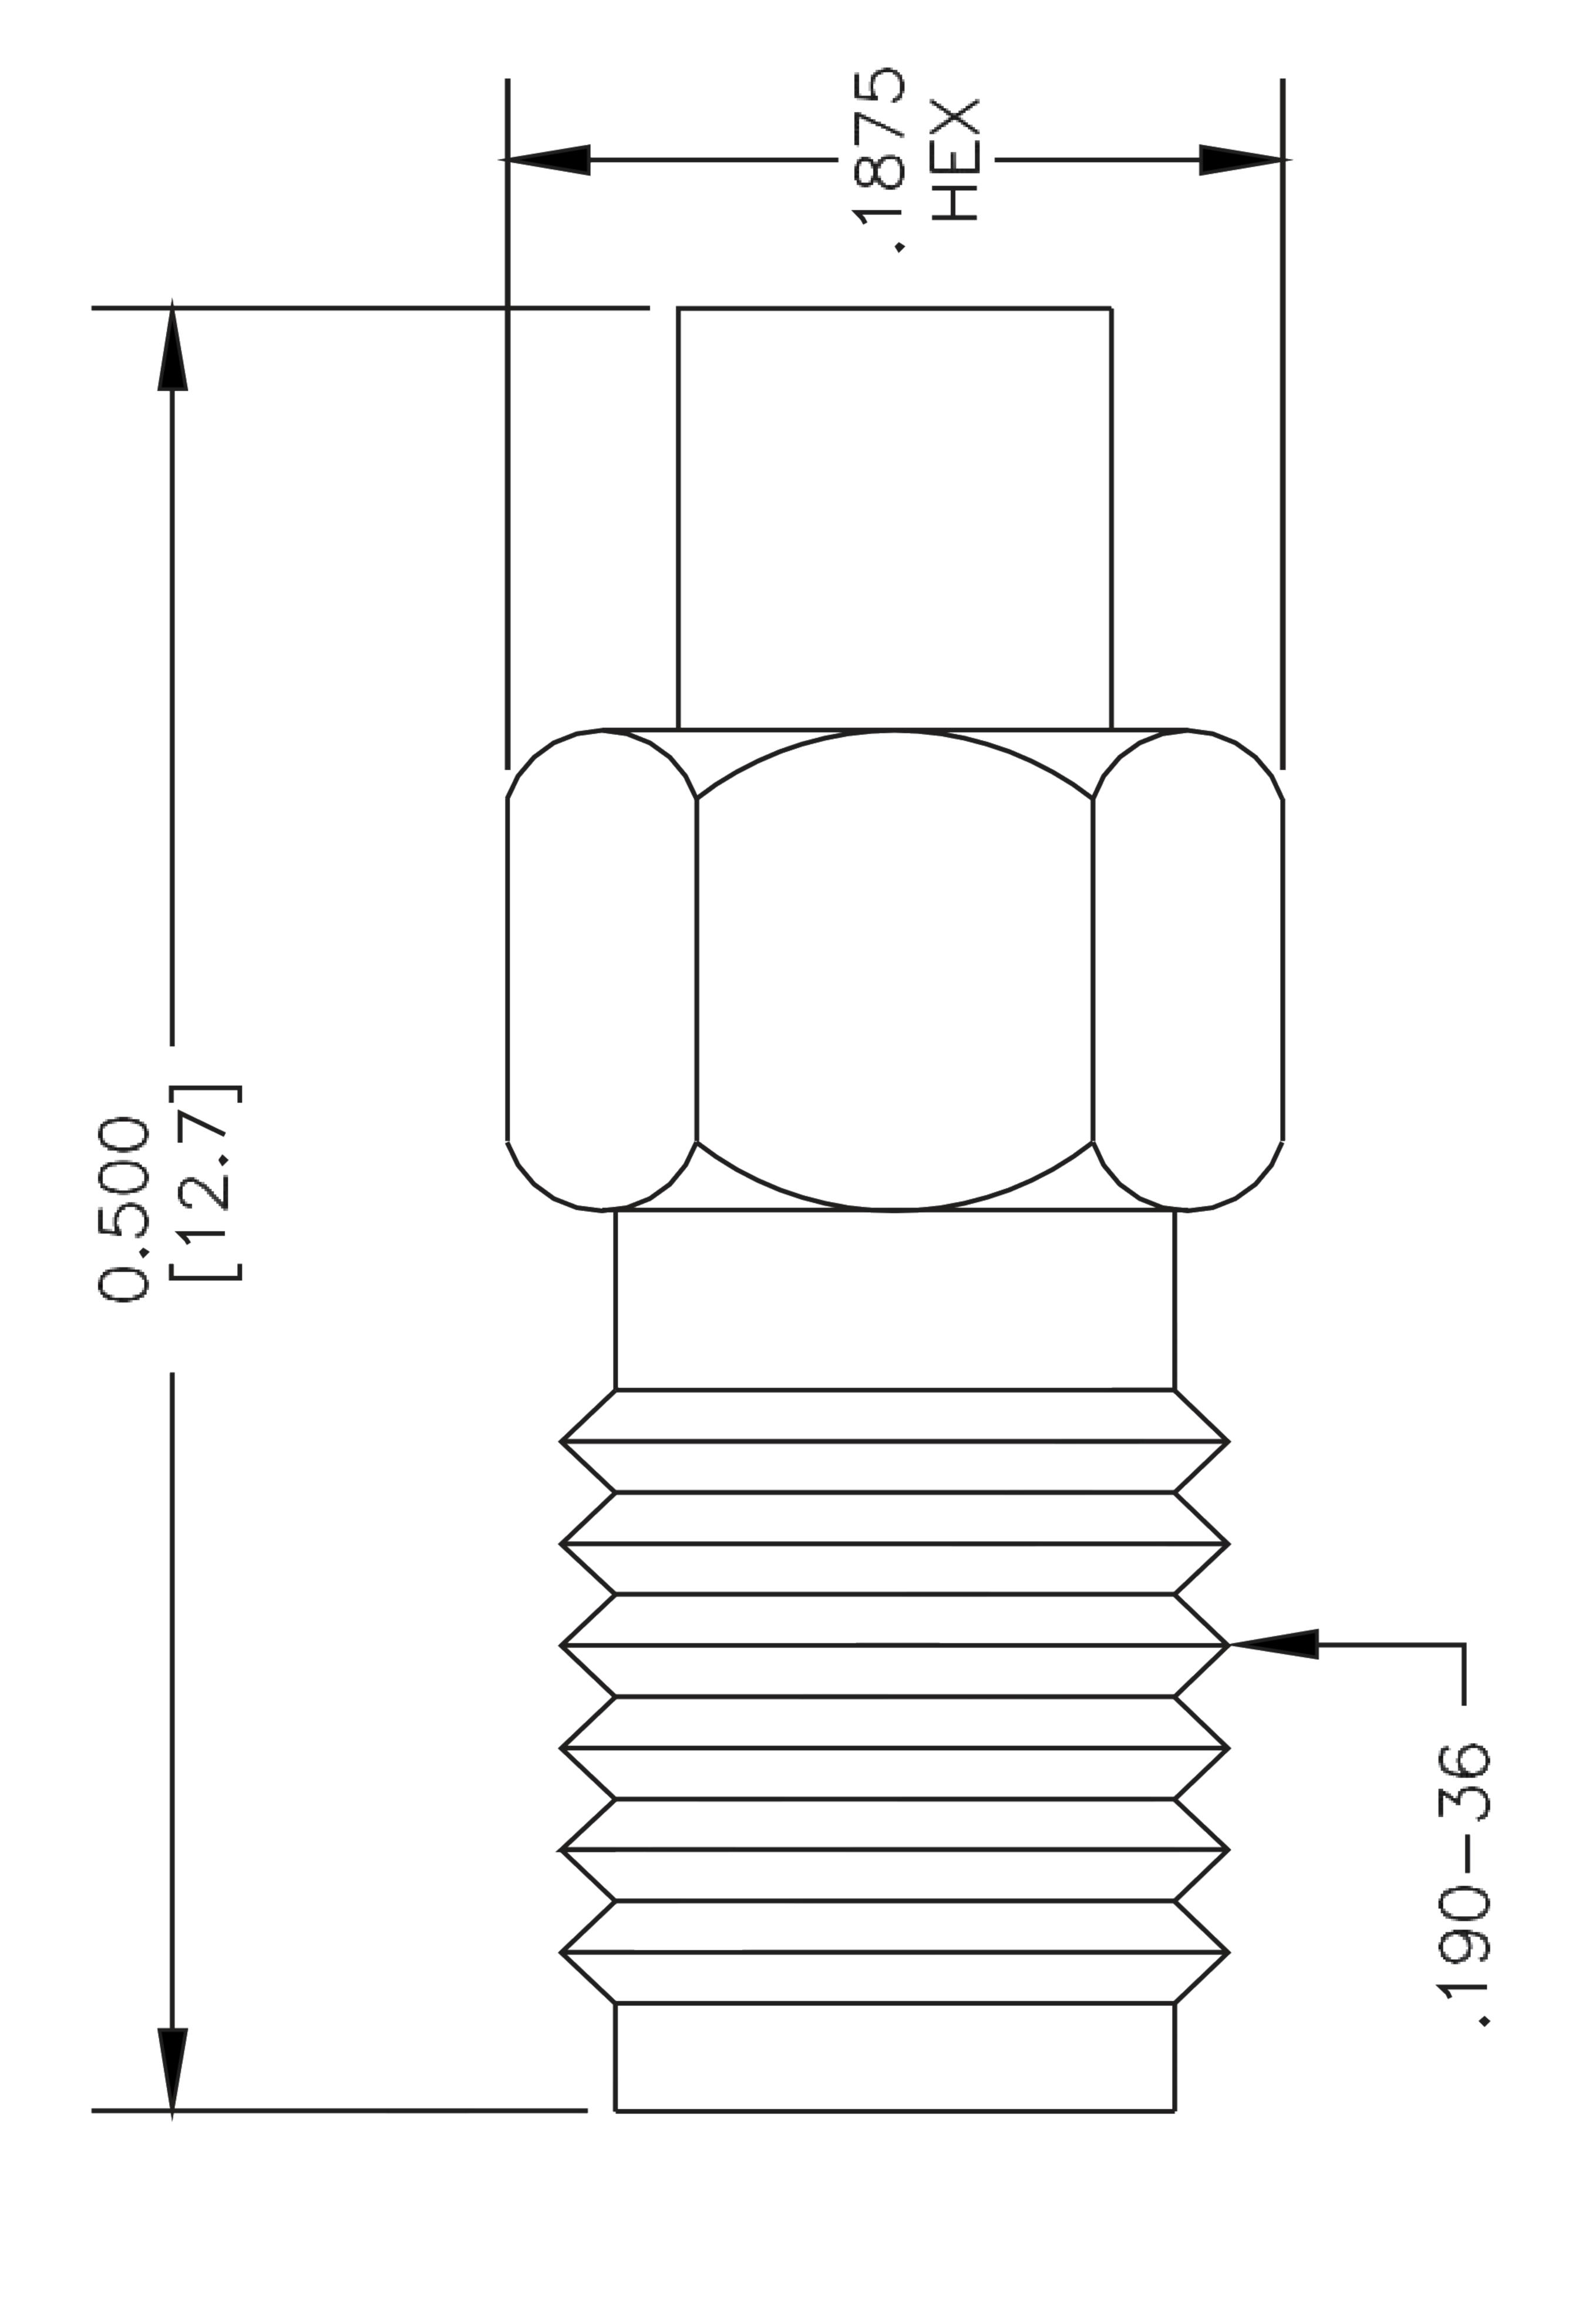

Ebeestock.com

8th Floor, Building 1, Yongfu Science
and Technology Center Industrial Park,
trict 5, Humen,523900, Dongguan, Guange: www.ebeestock.com Email: sales@ebees