

SSMA Female Connector Solder Attachment 2 Hole Flange Mount for ET38325, ET38324, ET38342, .328 inch Hole Spacing



# RF Connectors Technical Data Sheet

ET11633

## Configuration

- SSMA Female Connector
- MIL-STD-348
- 50 Ohms
- Straight Body Geometry

- ET38325, ET38324, ET38342 Interface Type
- Solder/Solder Attachment
- 2 Hole Flange

### Features

Gold Plated Contact

Contact plating according to MIL-G-45204

# Applications

General Purpose Test

- Rack and Panel Mount Applications
- Custom Cable Assemblies

### Description

Ebeestock's ET11633 SSMA female 2 hole flange mount connector with solder/solder attachment for ET38325, ET-SR047AL and ET38342 (.328 inch hole spacing) is part of our full line of RF components available for same-day shipping. This SSMA 2 hole flange connector allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Our SSMA female 2 hole flange connector ET11633 datasheet specifications and drawing with dimensions are shown below in this PDF. Ebeestock's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Ebeestock has the right connector for the job. Ebeestock can also expertly build your custom cable assemblies for you and ship same-day.

## Mechanical Specifications

S	Z	e
		V

 Length
 0.495 in [12.57 mm]

 Width/Dia.
 0.469 in [11.91 mm]

 Height
 0.188 in [4.78 mm]

 Weight
 0.004 lbs [1.81 g]

## Material Specifications

Description	Material	Plating
Contact		Gold MIL-G-45204
Insulation	PTFE	
Body	Stainless Steel	Gold MIL-G-45204

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SSMA Female Connector Solder Attachment 2 Hole Flange Mount for ET38325, ET-SR047AL, ET38342, .328 inch Hole Spacing ET11633

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



SSMA Female Connector Solder Attachment 2 Hole Flange Mount for ET38325, ET38324, ET38342, .328 inch Hole Spacing



## RF Connectors Technical Data Sheet

ET11633

Compliance Certifications (see product page for current document)

#### Plotted and Other Data

Notes:


SSMA Female Connector Solder Attachment 2 Hole Flange Mount for ET38325, ET38324, ET38342, .328 inch Hole Spacing from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SSMA Female Connector Solder Attachment 2 Hole Flange Mount for ET38325, ET38324, ET38342, .328 inch Hole Spacing ET11633

**URL:** https://www.ebeestock.com/ssma-female-connector-solder-attachment-2-hole-flange-mount-for-pe-047sr-pe-sr047al-pe-sr047fl-328-inch-hole-spacing-0011633

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.

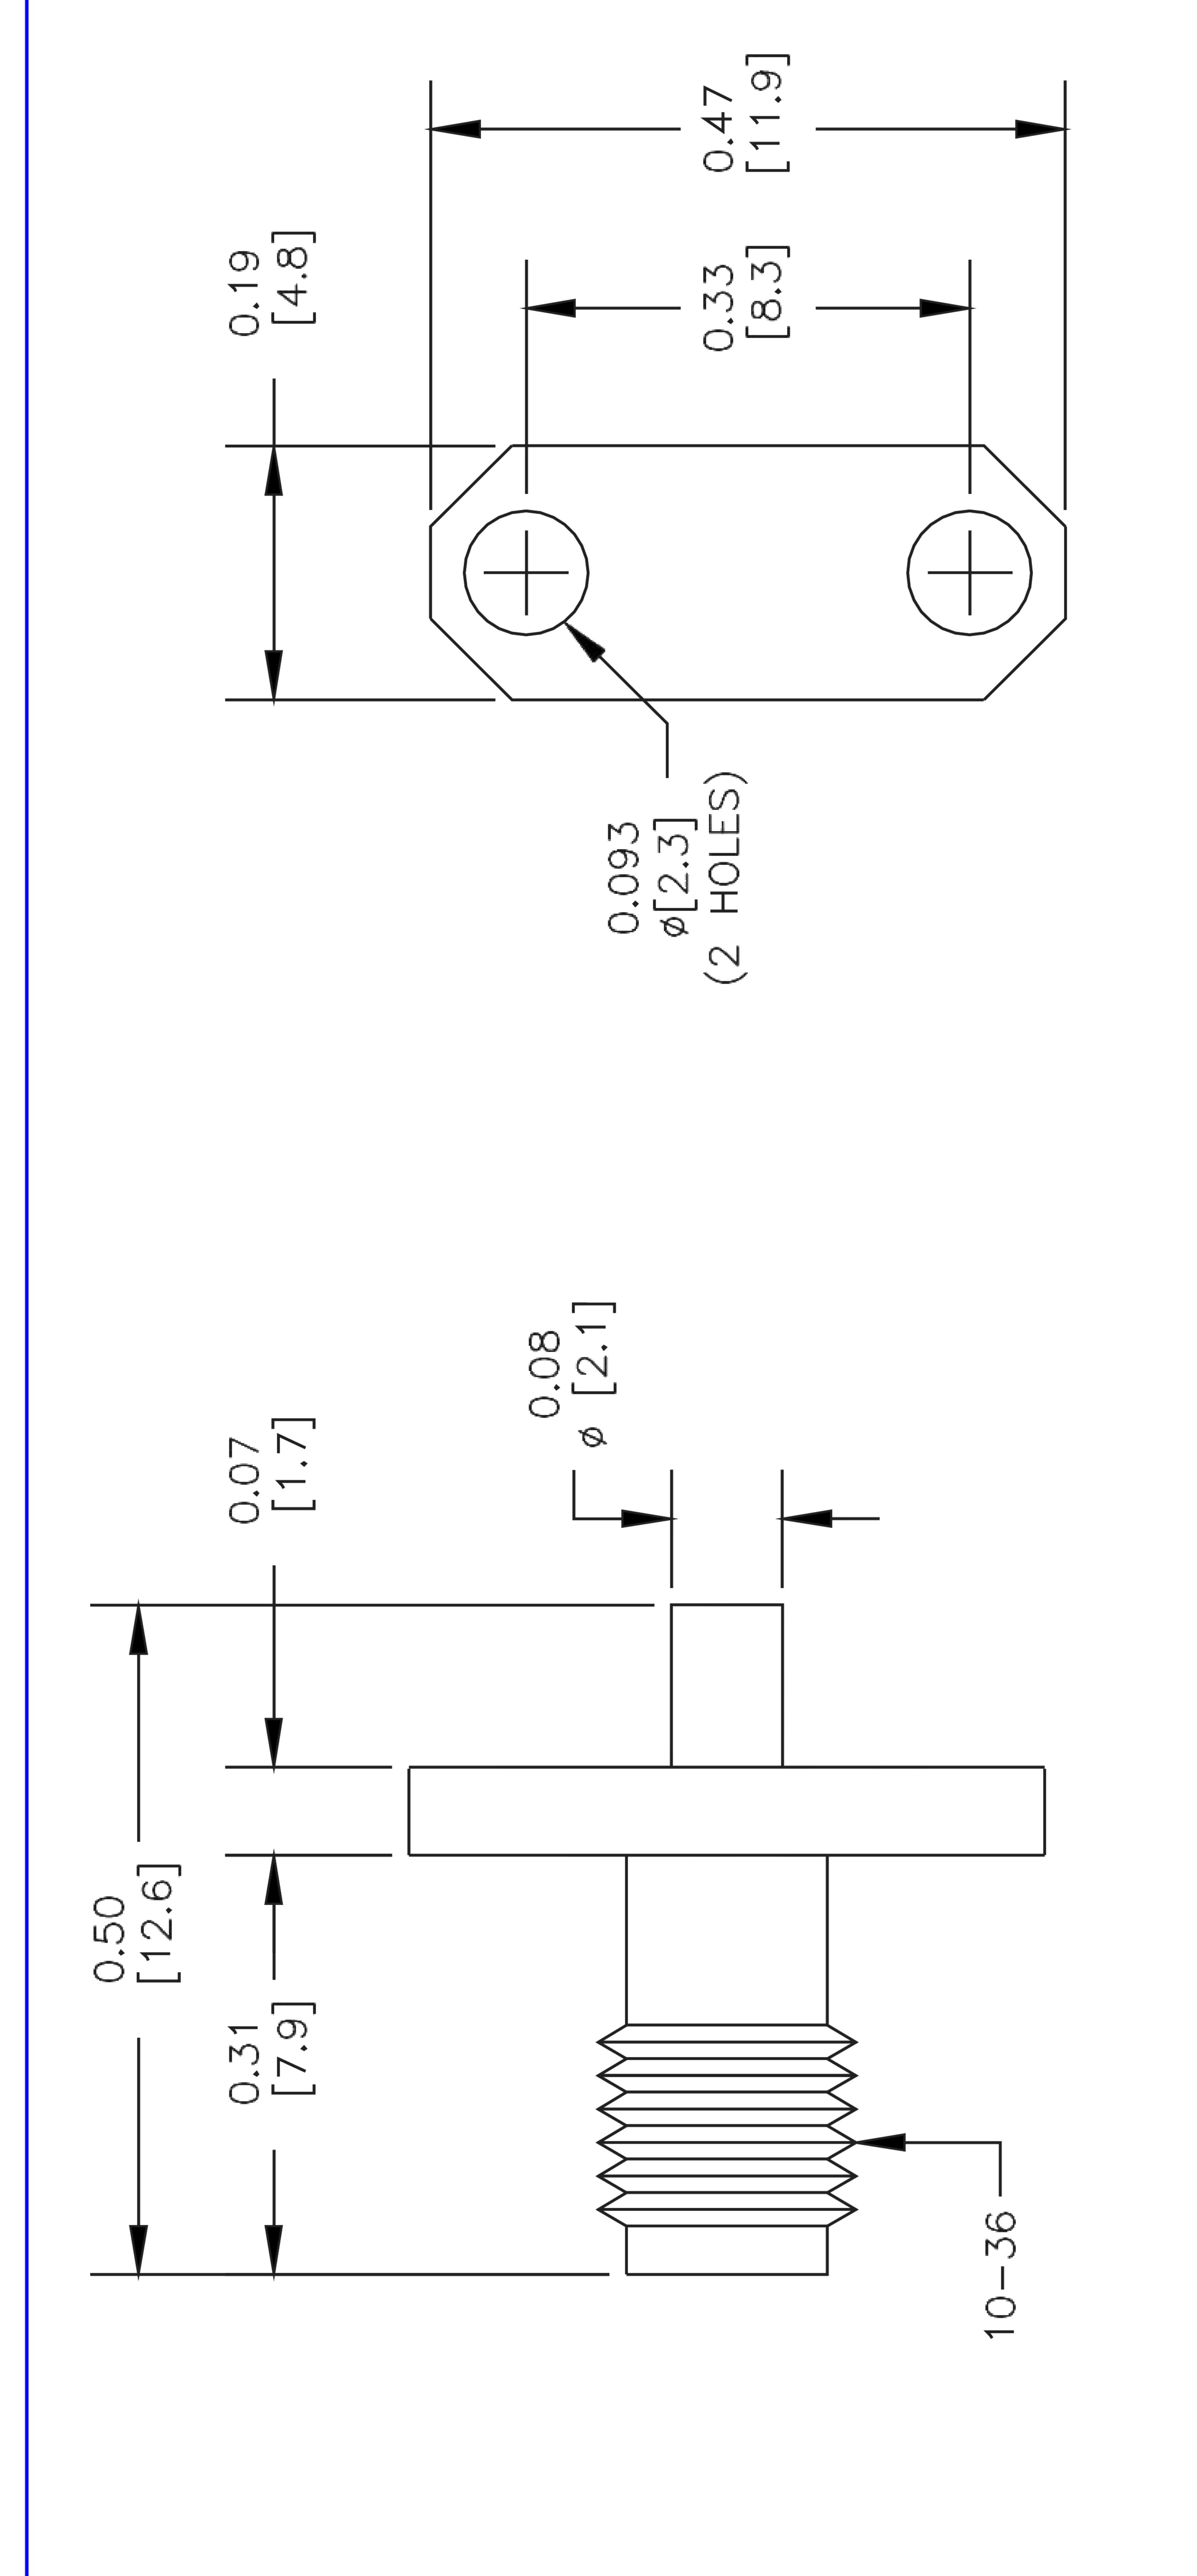

MONTINGME

ASSEMBLI PROCEDURES

STRIP CABLE TO DIMENSION SHOWN, DO NOT NICK CENTER CONDUCTOR & DIELECTRIC.

CONDUCTOR, INSERT CABLE INTO
BODY UNTIL CONTACT SETS IN
PLACE. SOLDER OUTER CONDUCTOF
TO BODY.

ebeestock.com

Building 1 Yourfu Science

	ARE IN INCHES [mm]. 7 AND EQUIVALENT CA
CM NO. 53919 CAD FILE 03180	031804