

SSMC Plug Right Angle Connector Solder Attachment for ET3832

1, ET38322, ET38322J, ET38340, ET-RG405



RF Connectors Technical Data Sheet

PE45384

Configuration

- SSMC Plug Connector
- 50 Ohms
- Right Angle Body Geometry

Features

- Max. Operating Frequency 10 GHz
- Good VSWR of 1.5:1
- Gold Plated Beryllium Copper Contact
- Contact plating according to MIL-G-45204
- Reliable threaded coupling

- ET38321, ET38322, ET38323, ET-SR405TN, ET-RG405 Interface Type
- Solder/Solder Attachment
- Small SSMC connector form factor (50% smaller than SMA, radially)
- IEC 60169-20 SSMC connector interface
- In stock and ready to ship

Applications

- General Purpose Test
- Custom Cable Assemblies
- Avionics

- A/D Modules
- Data Acquisition
- Software defined radio (SDR)
- RADAR/SONAR
- Ultra Wideband Digital Receivers
- Medical equipment

Description

Ebeestock's ET11652 SSMC plug right angle connector with solder/solder attachment for ET38321, ET38322, ET-SR405FLJ, ET38340 and ET-RG405 is part of our full line of RF components available for same-day shipping. Our SSMC plug connector operates up to a maximum frequency of 10 GHz and offers good VSWR of 1.5:1. Its right angle body geometry allows for easier connections in tight spaces.

Our SSMC plug right angle connector ET11652 datasheet specifications and drawing with dimensions are shown below in this PDF. Ebeestock's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Ebeestock has the right connector for the job. Ebeestock can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------------|---------|---------|---------|-------|
| Frequency Range | DC | | 10 | GHz |
| VSWR | | | 1.5:1 | |
| Insertion Loss | | | 0.3 | dB |
| Operating Voltage (AC) | | | 250 | Vrms |
| High Potential Voltage | | | 400 | Vrms |
| 5 MHz | | | | |
| Inner Conductor DC Resistance | | | 4 | mOhms |
| Outer Conductor DC Resistance | | | 1 | mOhms |
| Insulation Resistance | 1,000 | | | MOhms |
| RF Leakage | -50 | | | dB |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SSMC Plug Right Angle Connector Solder Attachment for ET38321, ET38322, ET- SR405FLJ, ET38340, ET-RG405 ET11652

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



SSMC Plug Right Angle Connector Solder Attachment for ET3832 1, ET38322, ET38322J, ET38340, ET-RG405



RF Connectors Technical Data Sheet

PE45384

Mechanical Specifications

Size

 Length
 0.421 in [10.69 mm]

 Width/Dia.
 0.156 in [3.96 mm]

 Height
 0.322 in [8.18 mm]

Mating Cycles 500 Cycles

1.75 to 2 in-lbs [0.20 to 0.23 Nm]

Material Specifications

| Description | Material | Plating |
|--------------|------------------|---------------------|
| Contact | Beryllium Copper | Gold MIL-G-45204 |
| Insulation | Teflon | |
| Body | Brass | Gold MIL-G-45204 |
| Coupling Nut | Beryllium Copper | Gold MIL-G-45204 |

Environmental Specifications

Temperature

Operating Range -65 to +165 deg C

Shock Method 213, Condition B, 75G @6ms @1/2 sine

Vibration Method 204, Condition D (20G)

Salt Spray Method 101, Condition B, 5% salt solution

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SSMC Plug Right Angle Connector Solder Attachment for ET38321, ET38322, ET- SR405FLJ, ET38340, ET-RG405 ET11652

www.ebeestock.com

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



SSMC Plug Right Angle Connector Solder Attachment for ET3832

1, ET38322, ET38322J, ET38340, ET-RG405




RF Connectors Technical Data Sheet


PE45384

Assembly Instruction


Assembly Instructions

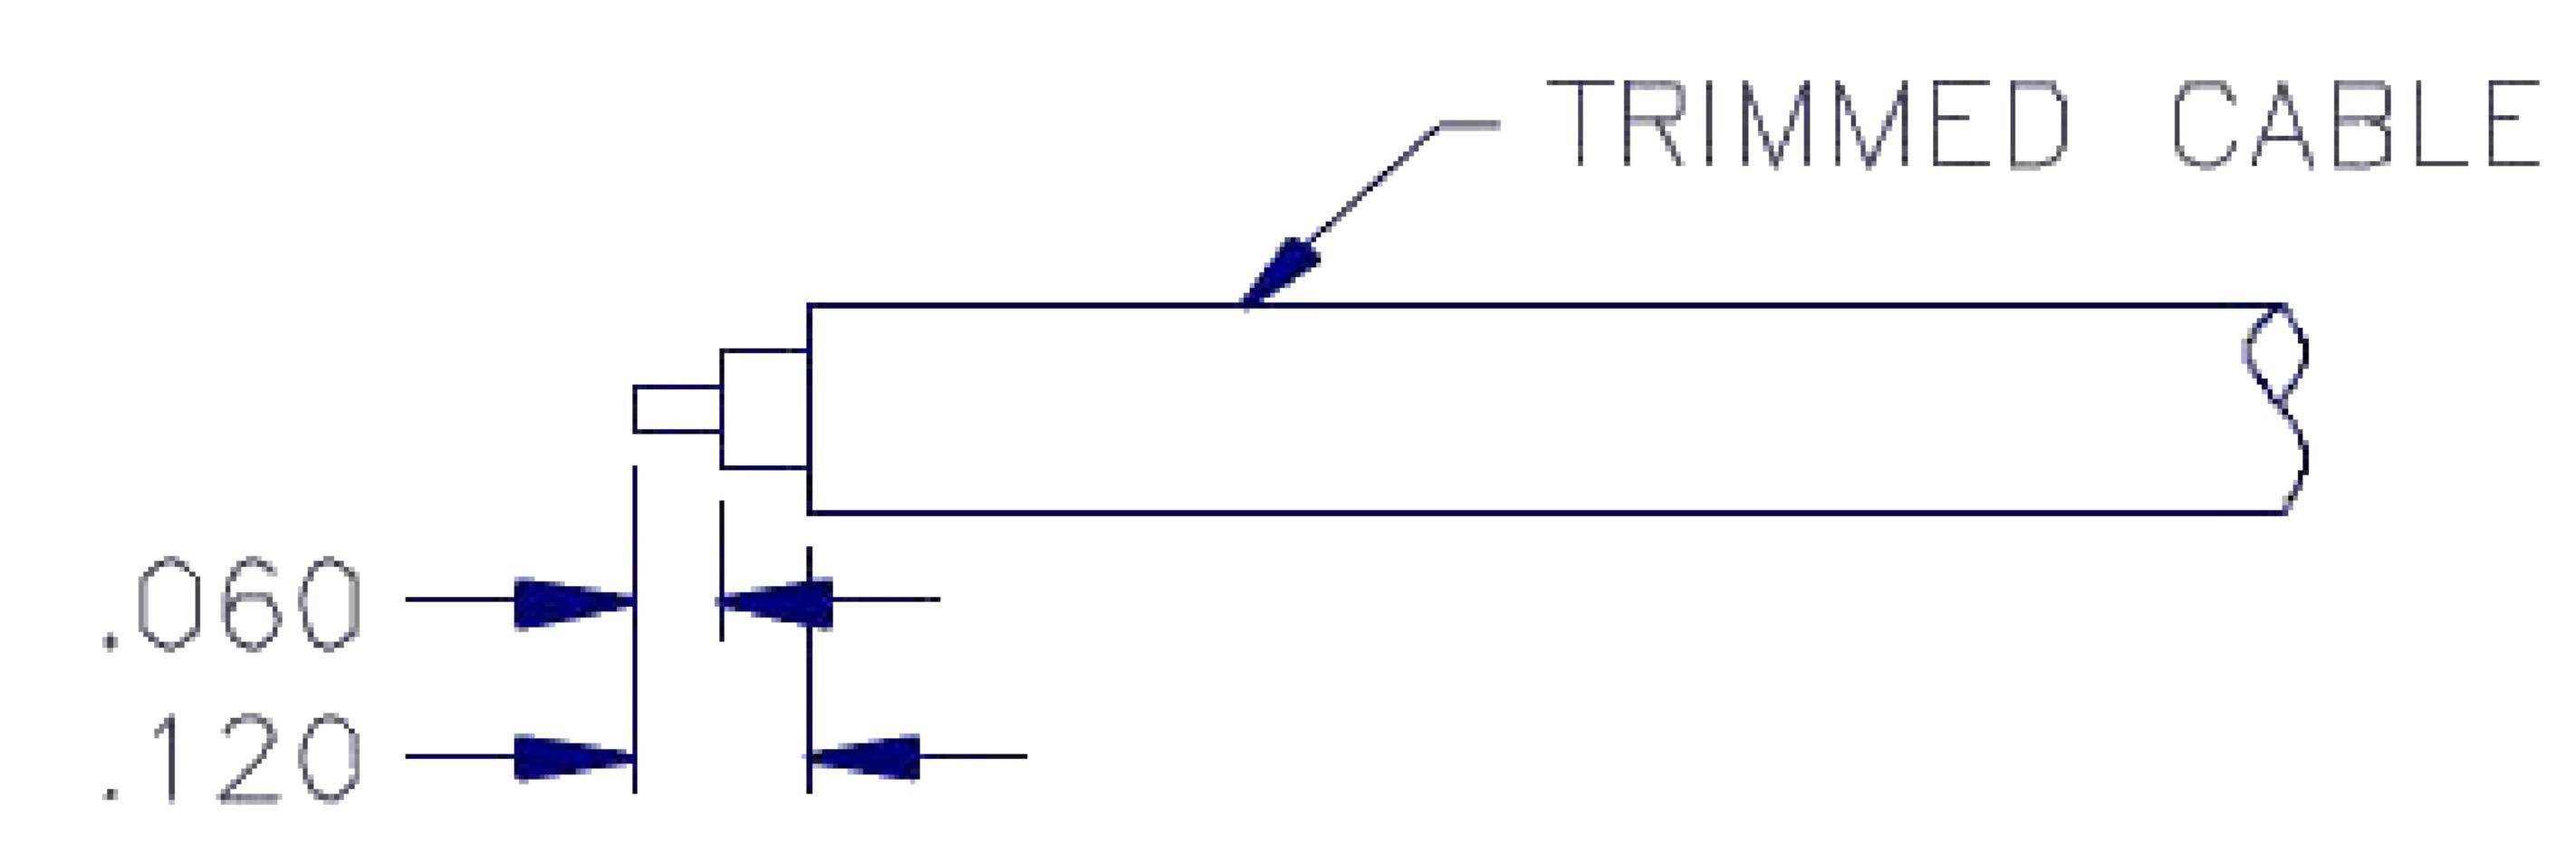

- 1. TRIM CABLE AS SHOWN ABOVE.
- 2. INSERT CABLE INTO BODY. CABLE JACKET SHOULD BOTTOM ON STEP INSIDE BODY AND CENTER CONDUCTOR SHOULD LIE IN SLOT OF CONTACT. FIXTURE IN THIS POSITION.

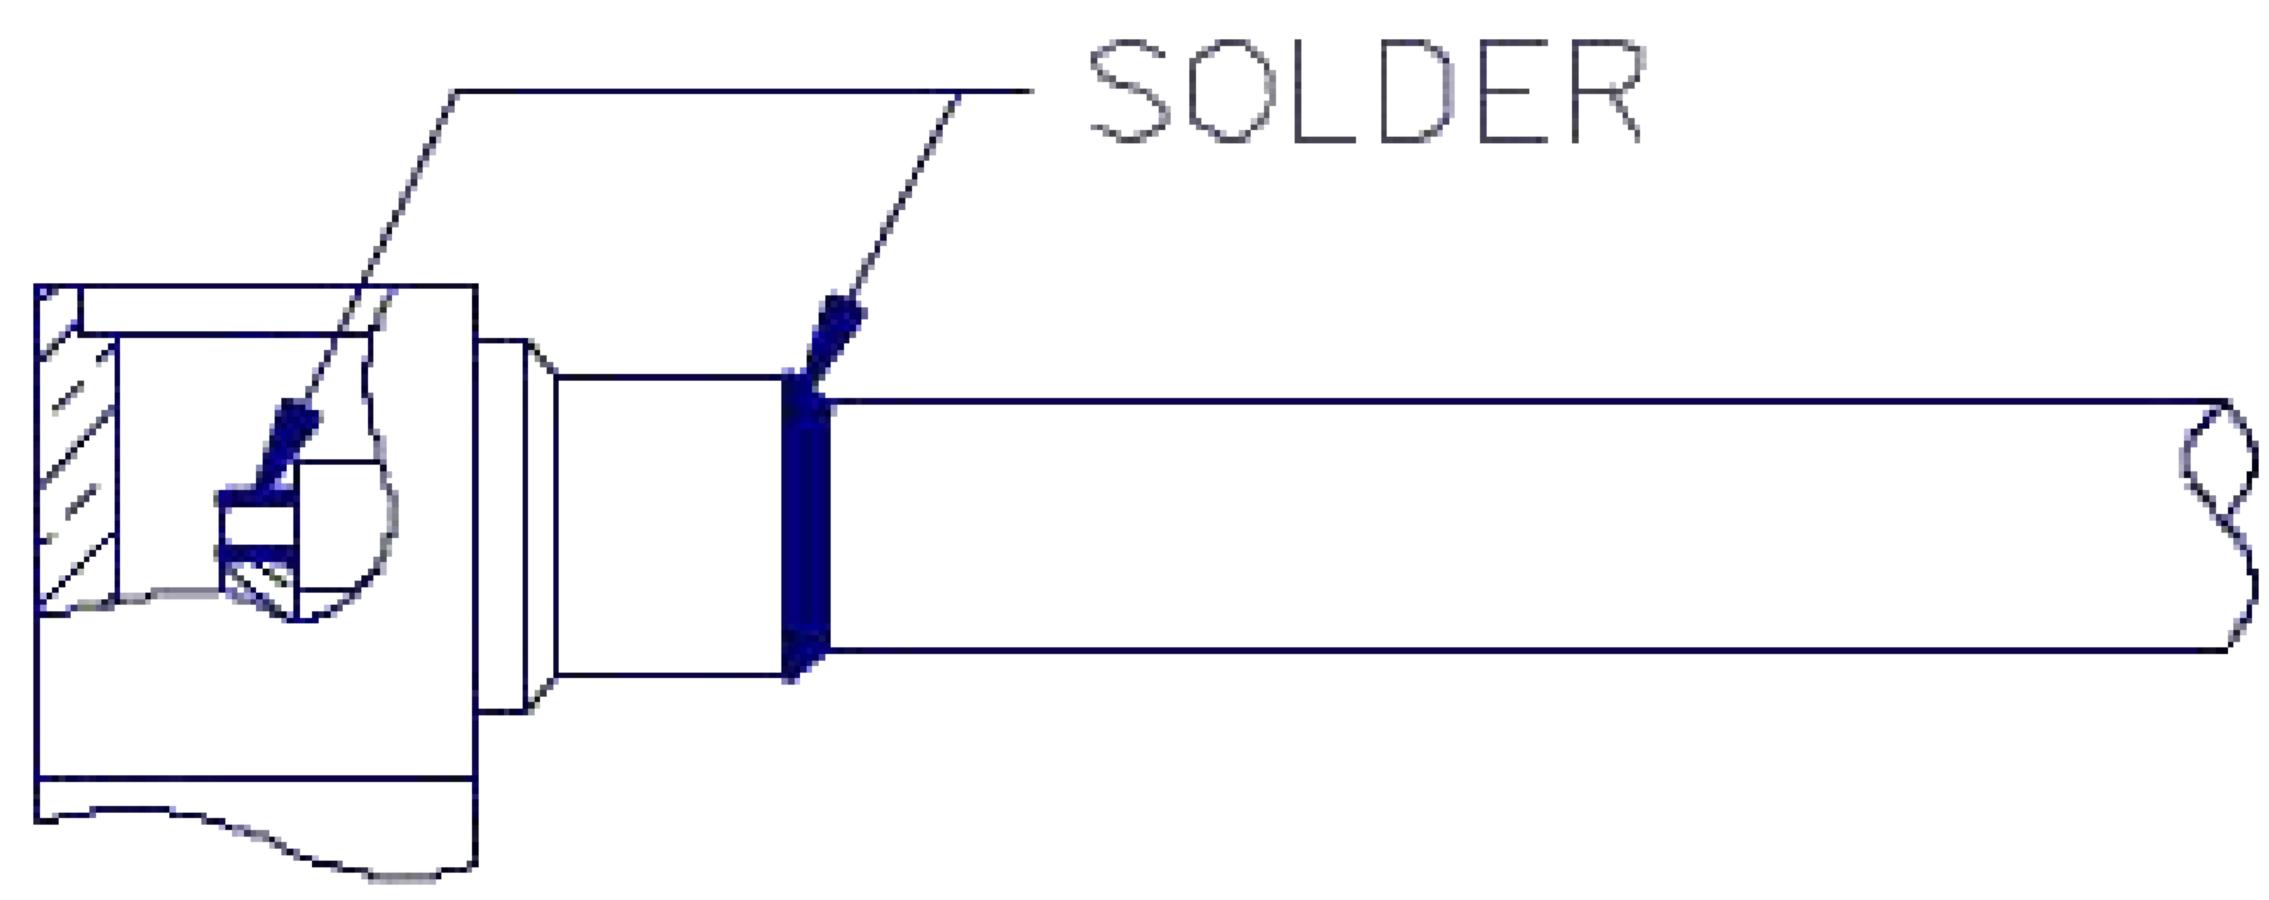

- 3. SOLDER CENTER CONDUCTOR TO CONTACT.
- 4. SOLDER CABLE JACKET TO CONNECTOR BODY. DO NOT DISTURB JOINT UNTIL IT HAS COOLED. CLEAN FLUX RESIDUE.

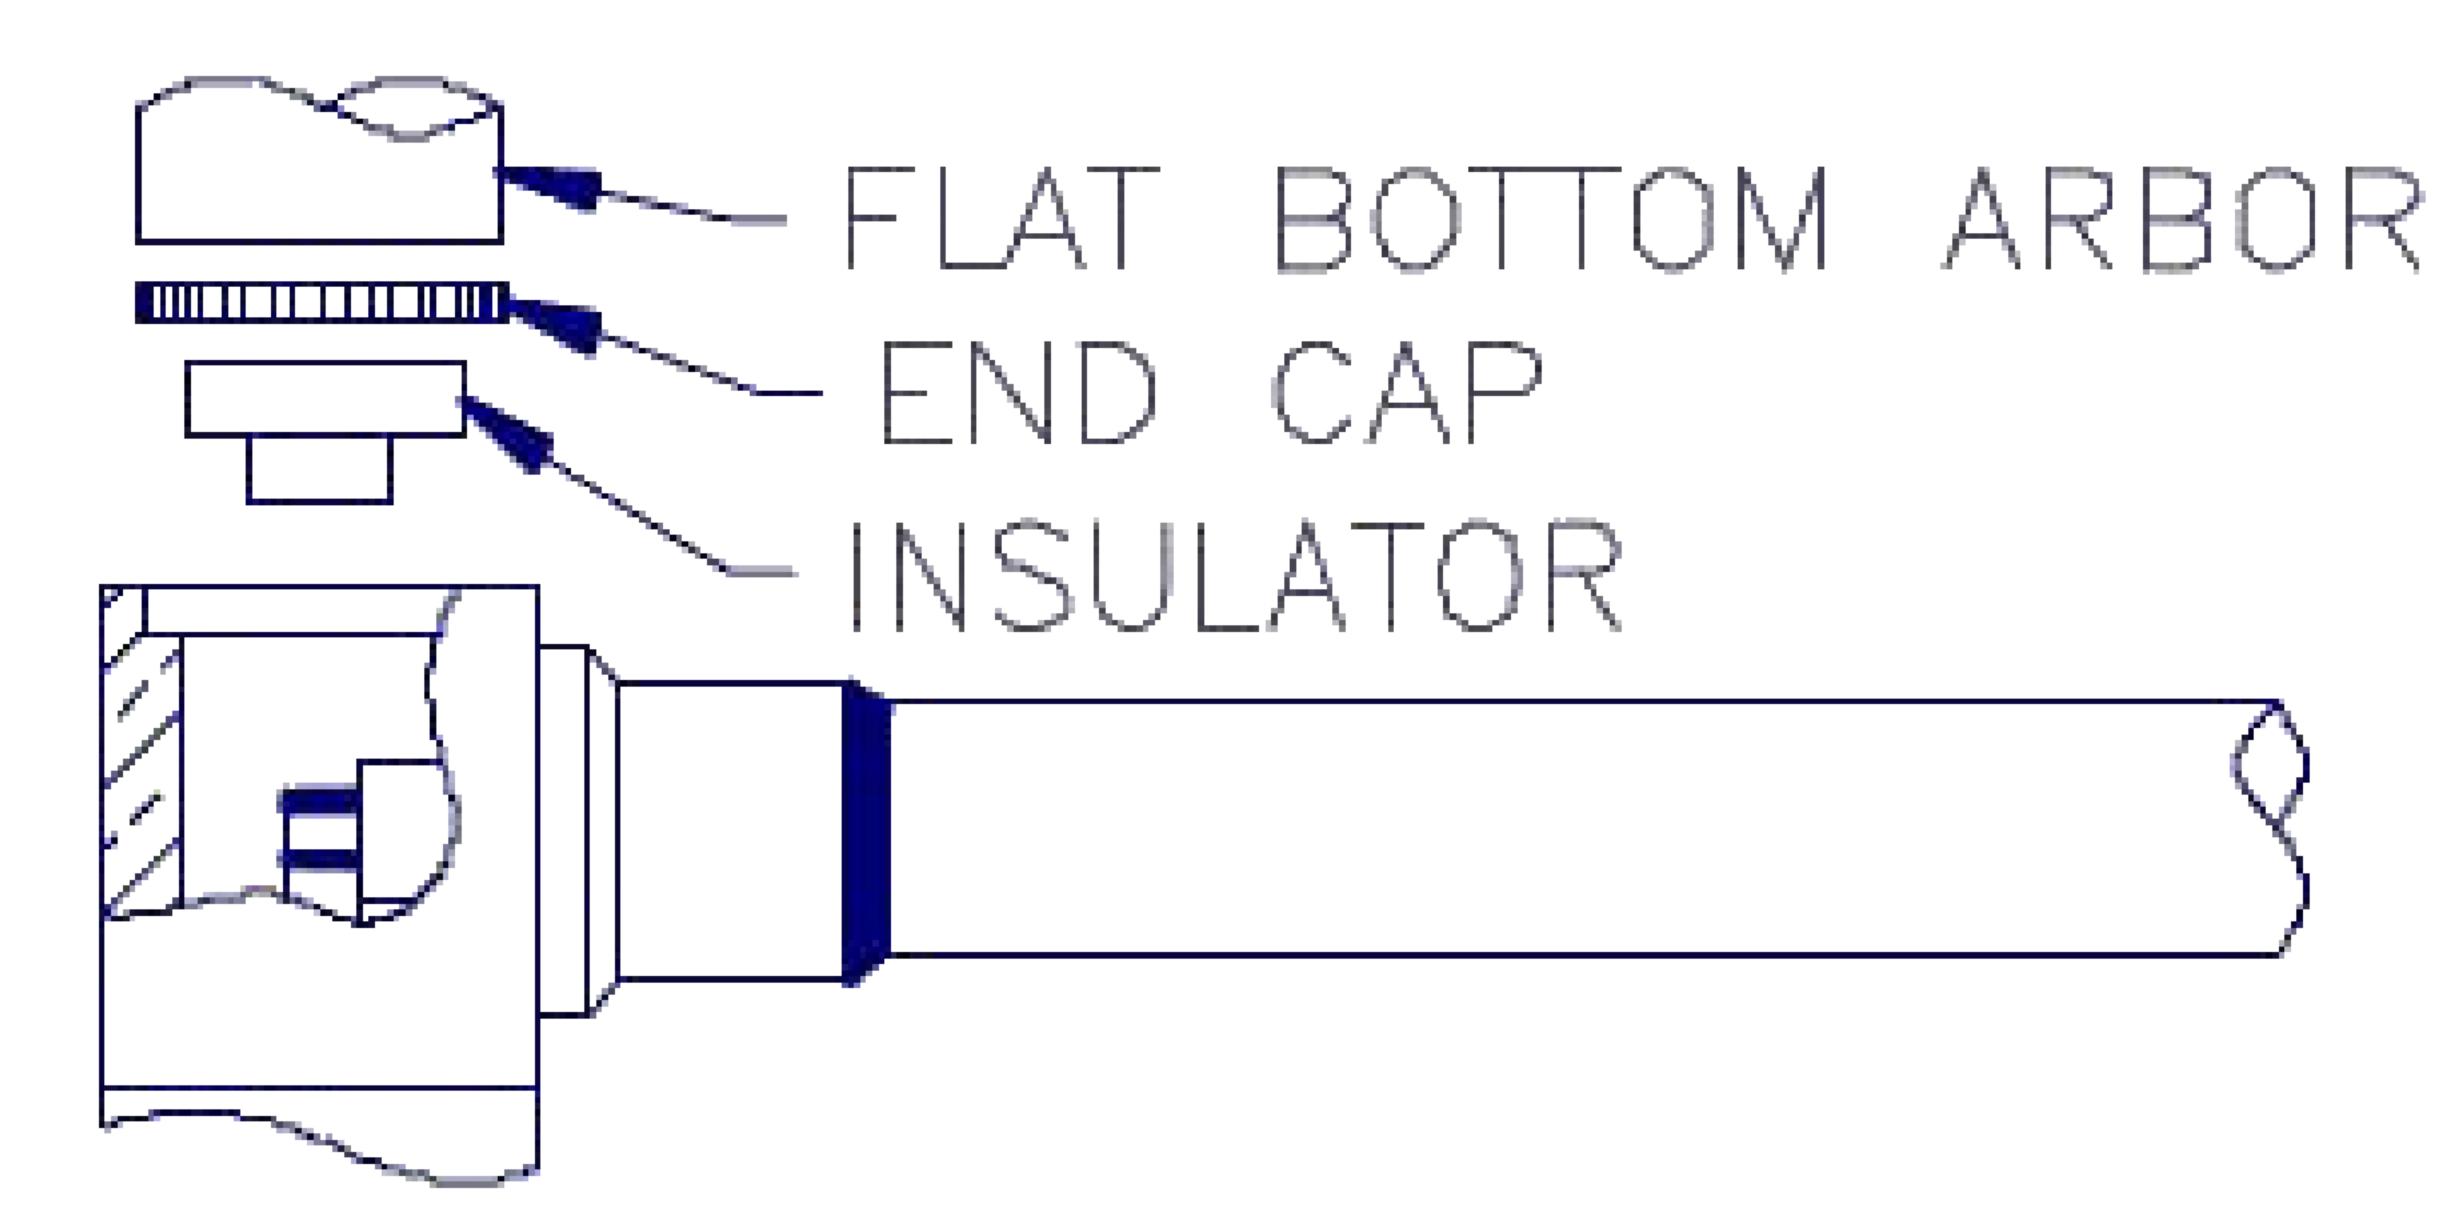

5. PRESS INSULATOR AND END CAP INTO CONNECTOR BODY AND USE A FLAT BOTTOM ARBOR TO PRESS CAP IN PLACE. CAP MUST BE BELOW BODY SURFACE TO SEAT PROPERLY.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SSMC Plug Right Angle Connector Solder Attachment for ET38321, ET38322, ET- SR405FLJ, ET38340, ET-RG405 ET11652

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



SSMC Plug Right Angle Connector Solder Attachment for ET3832 1, ET38322, ET38322J, ET38340, ET-RG405



RF Connectors Technical Data Sheet

ET11652

SSMC Plug Right Angle Connector Solder Attachment for ET38321, ET38322, ET38323, ET38340, ET-RG405 from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SSMC Plug Right Angle Connector Solder Attachment for ET38321, ET38322, ET- SR405FLJ, ET38340, ET-RG405 ET11652

URL: https://www.ebeestock.com/ssmc-plug-right-angle-connector-solder-attachment-for-pe-sr405al -pe-sr405fl-pe-sr405flj-pe-sr405tn-rg405-0011652

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

