

RP-TNC Female Connector Crimp/Non-Solder Contact Attachment for ET38369, ET38356



# RF Connectors Technical Data Sheet



# Times Microwave Systems Connector Specification

# Configuration

- TNC Female Reverse Polarity Connector
- 50 Ohms

- Straight Body Geometry
- Connector Interface Types: ET38369, ET38356

## Features

- Max. Operating Frequency 3 GHz
- Excellent VSWR of 1.25:1

- Gold Plated Beryllium Copper Contact
- Reverse Polarity

## Applications

General Purpose Test

Custom Cable Assemblies

#### Description

Ebeestock's ET11668 RP TNC female connector with crimp/non-solder contact attachment for ET38369 and ET38356 is part of our full line of RF components available for same-day shipping. The female reverse polarity configuration uses a female connector body with a male inner contact pin. Our TNC female connector operates up to a maximum frequency of 3 GHz and offers excellent VSWR of 1.25:1.

Our reverse polarity TNC female connector ET11668 datasheet specifications and drawing with dimensions are shown below in this PDF. Ebeestock's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Ebeestock has the right connector for the job. Ebeestock can also expertly build your custom cable assemblies for you and ship same-day.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.25:1	
Insertion Loss			0.17	dB
Operating Voltage (AC)			500	Vrms

#### Mechanical Specifications

## Size

Length 1.26 in [32 mm] 0.57 in [14.48 mm] Width/Dia.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: RP-TNC Female Connector Crimp/Non-Solder Contact Attachment for ET38369, ET-C200 ET11668

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



RP-TNC Female Connector Crimp/Non-Solder Contact Attachment for ET38369, ET38356



# RF Connectors Technical Data Sheet



## Material Specifications

Description	Material	Plating	
Contact	Beryllium Copper	Gold	
Insulation	PTFE		
Outer Conductor	Brass	Tri-Metal	
Body	Brass	Tri-Metal	
Crimp Sleeve	Copper	Tri-Metal	

## **Environmental Specifications**

Compliance Certifications (see product page for current document)

#### Plotted and Other Data

Notes:


RP-TNC Female Connector Crimp/Non-Solder Contact Attachment for ET38369, ET38356 from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: RP-TNC Female Connector Crimp/Non-Solder Contact Attachment for ET38369, ET38356 EZ-200-TF-RP

**URL:** https://www.ebeestock.com/rp-tnc-female-connector-crimp-non-solder-contact-attachment-forlmr-200-pe-c200-0011668

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen, 523900, Dongguan, Guangdong, China.

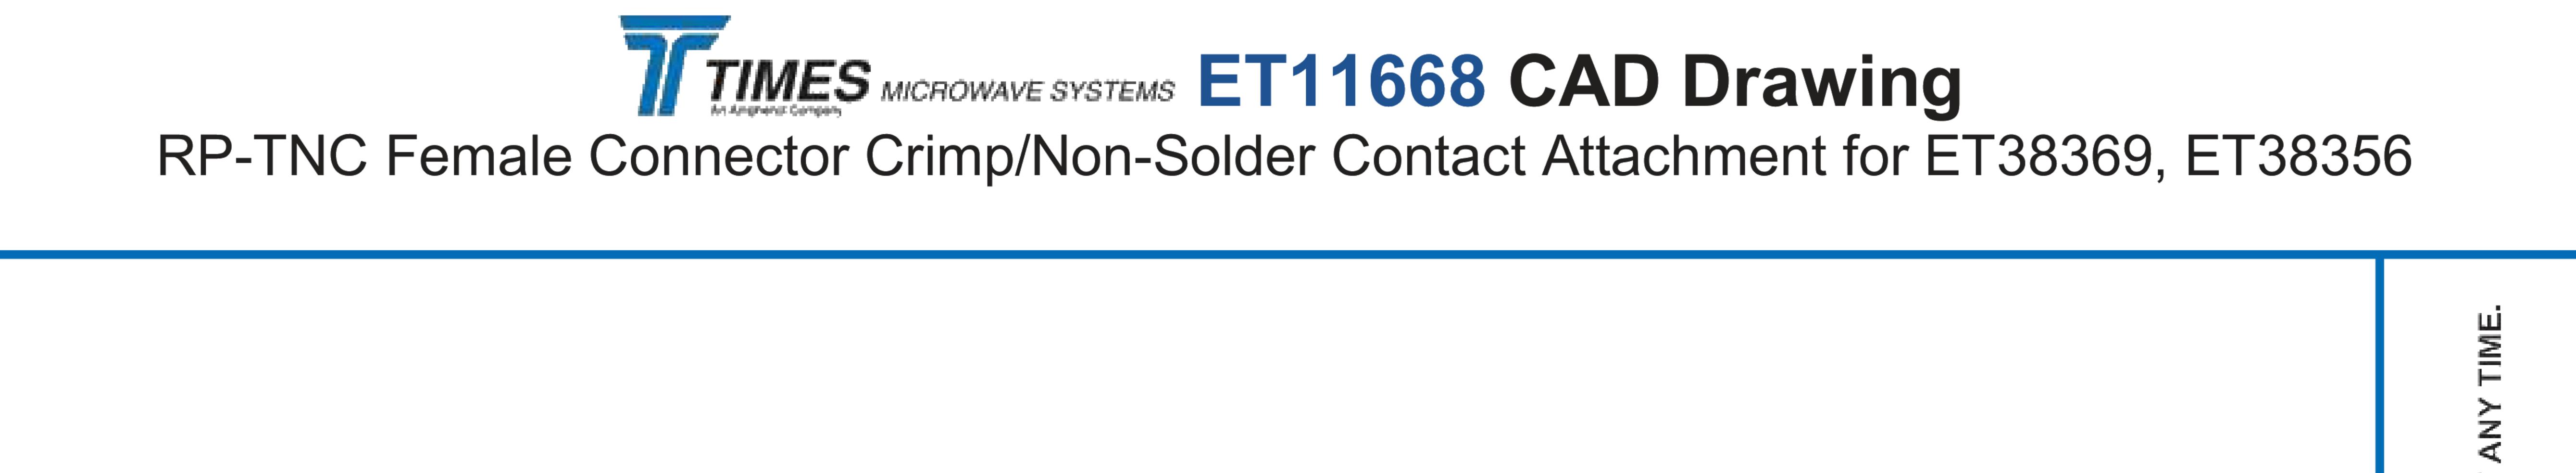

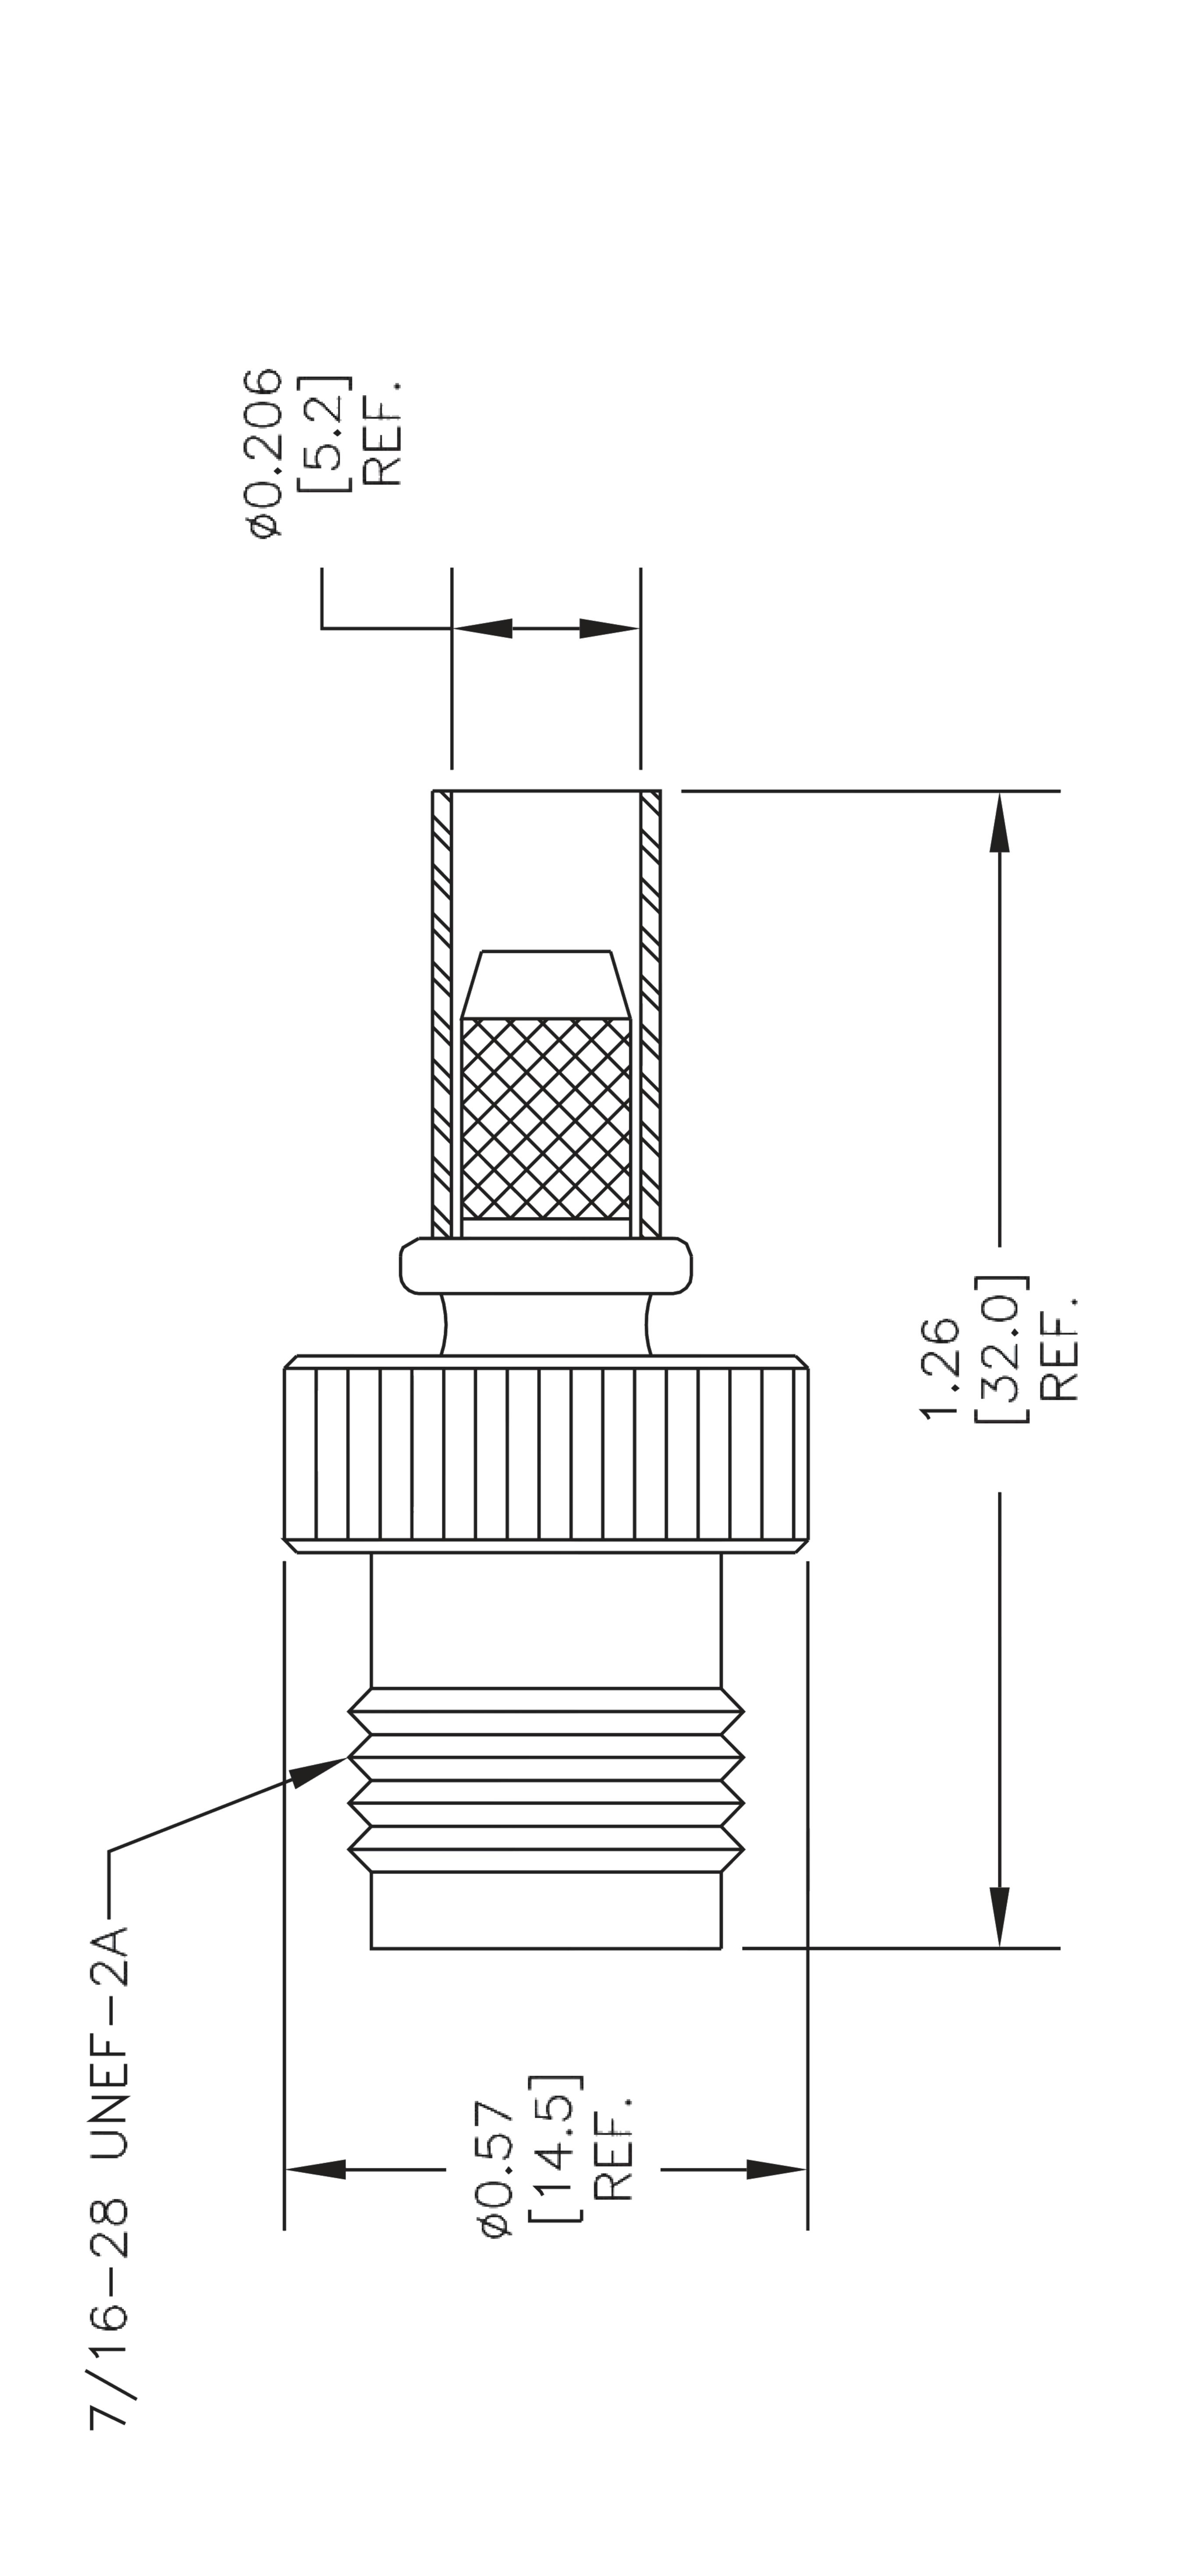

DIMENSIONS ARE NOMINAI TO CHANGE WITHOUT NOT

or, Building