

TNC Male Right Angle Connector Crimp/Solder Attachment for E T-ET-RG174, ET-RG316, ET-RG188, 0.100 inch, ET-B100, ET-C100, ET-LMR-100



RF Connectors Technical Data Sheet ET11714

Configuration

- TNC Male Connector
- 50 Ohms
- Right Angle Body Geometry

Features

• Max. Operating Frequency 11 GHz

- ET-RG174, ET-RG316, ET-RG188, 0.100 inch, ET-B100, ET-
- C100, ET-LMR-100 Interface Type
- Crimp/Solder Attachment
- Gold Plated Brass Contact

Applications

General Purpose Test

Custom Cable Assemblies

Description

Ebeestock's ET11714 TNC male right angle connector with crimp/solder attachment for ET-RG174, ET-RG316, ET-RG188, 0.100 inch, ET-B100, ET-C100 and ET-LMR-100 is part of our full line of RF components available for same-day shipping. Our TNC male connector operates up to a maximum frequency of 11 GHz. Its right angle body geometry allows for easier connections in tight spaces.

Our TNC male right angle connector ET11714 datasheet specifications and drawing with dimensions are shown below in this PDF. Ebeestock's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Ebeestock has the right connector for the job. Ebeestock can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		11	GHz

Mechanical Specifications


Size	
Length	1.08 in [27.43 mm]
Width/Dia.	0.57 in [14.48 mm]
Height	0.92 in [23.37 mm]
Weight	0.049 lbs [22.23 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: TNC Male Right Angle Connector Crimp/Solder Attachment for ET-RG174, ET-RG316, ET-RG188, 0.100 inch, ET-B100, ET-C100, ET-LMR-100 ET11714

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



TNC Male Right Angle Connector Crimp/Solder Attachment for E T-ET-RG174, ET-RG316, ET-RG188, 0.100 inch, ET-B100, ET-C100, ET-LMR-100

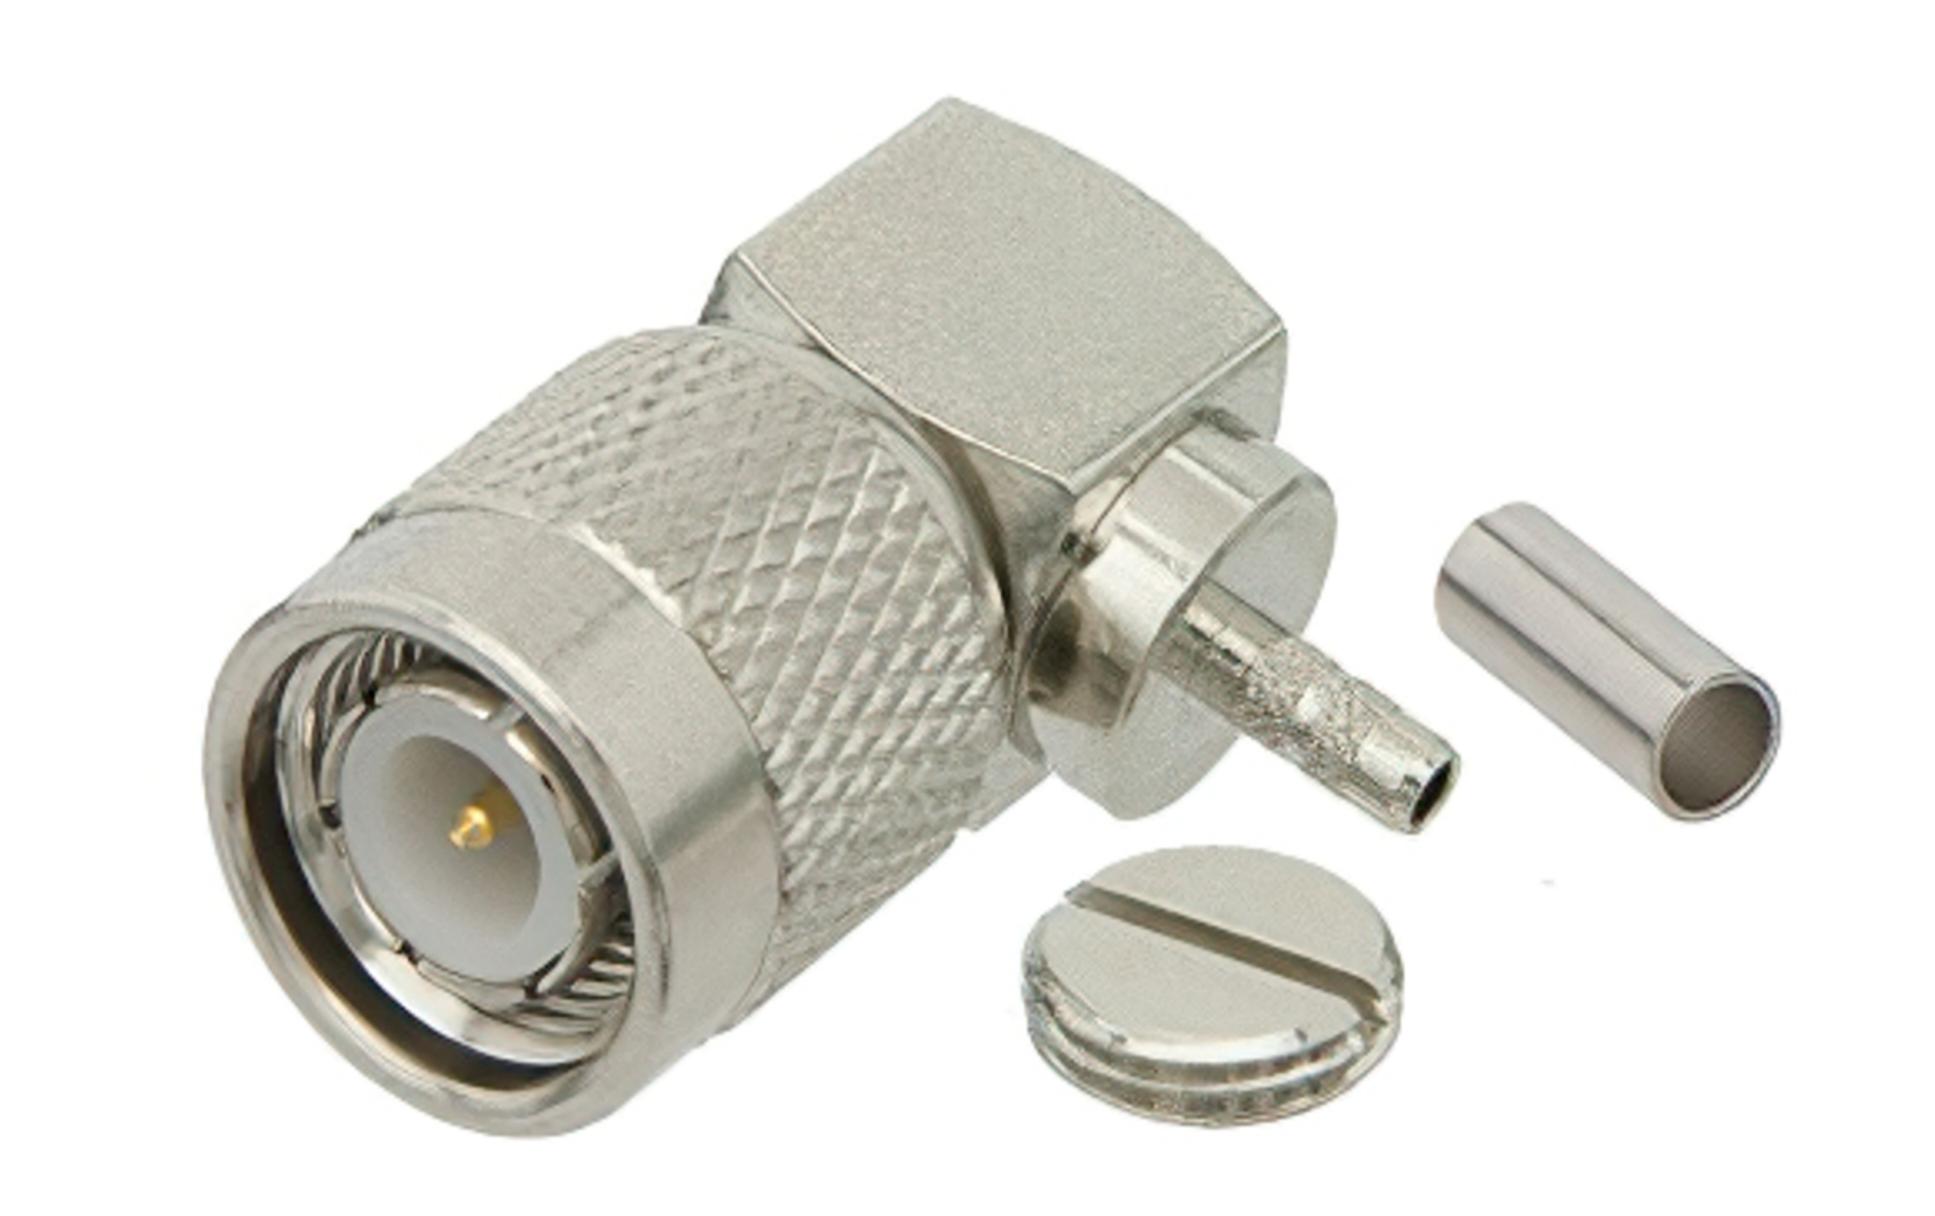

RF Connectors Technical Data Sheet ET11714

Material Specifications

Description	Material	Plating
Contact	Brass	Gold
Insulation	POM	
Body	Brass	Nickel

Environmental Specifications

Temperature

Operating Range

-40 to +85 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:


TNC Male Right Angle Connector Crimp/Solder Attachment for ET-RG174, ET-RG316, ET-RG188, 0.100 inch, ET-B100, ET-C100, ET-LMR-100 from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: TNC Male Right Angle Connector Crimp/Solder Attachment for ET-RG174, ET-RG316, ET-RG188, 0.100 inch, ET-B100, ET-C100, ET-LMR-100 ET11714

URL: https://www.ebeestock.com/tnc-male-right-angle-connector-crimp-solder-attachment-for-rg174 -rg316-rg188-0-100-inch-pe-b100-pe-c100-lmr-100-0011714


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. <a href="Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.

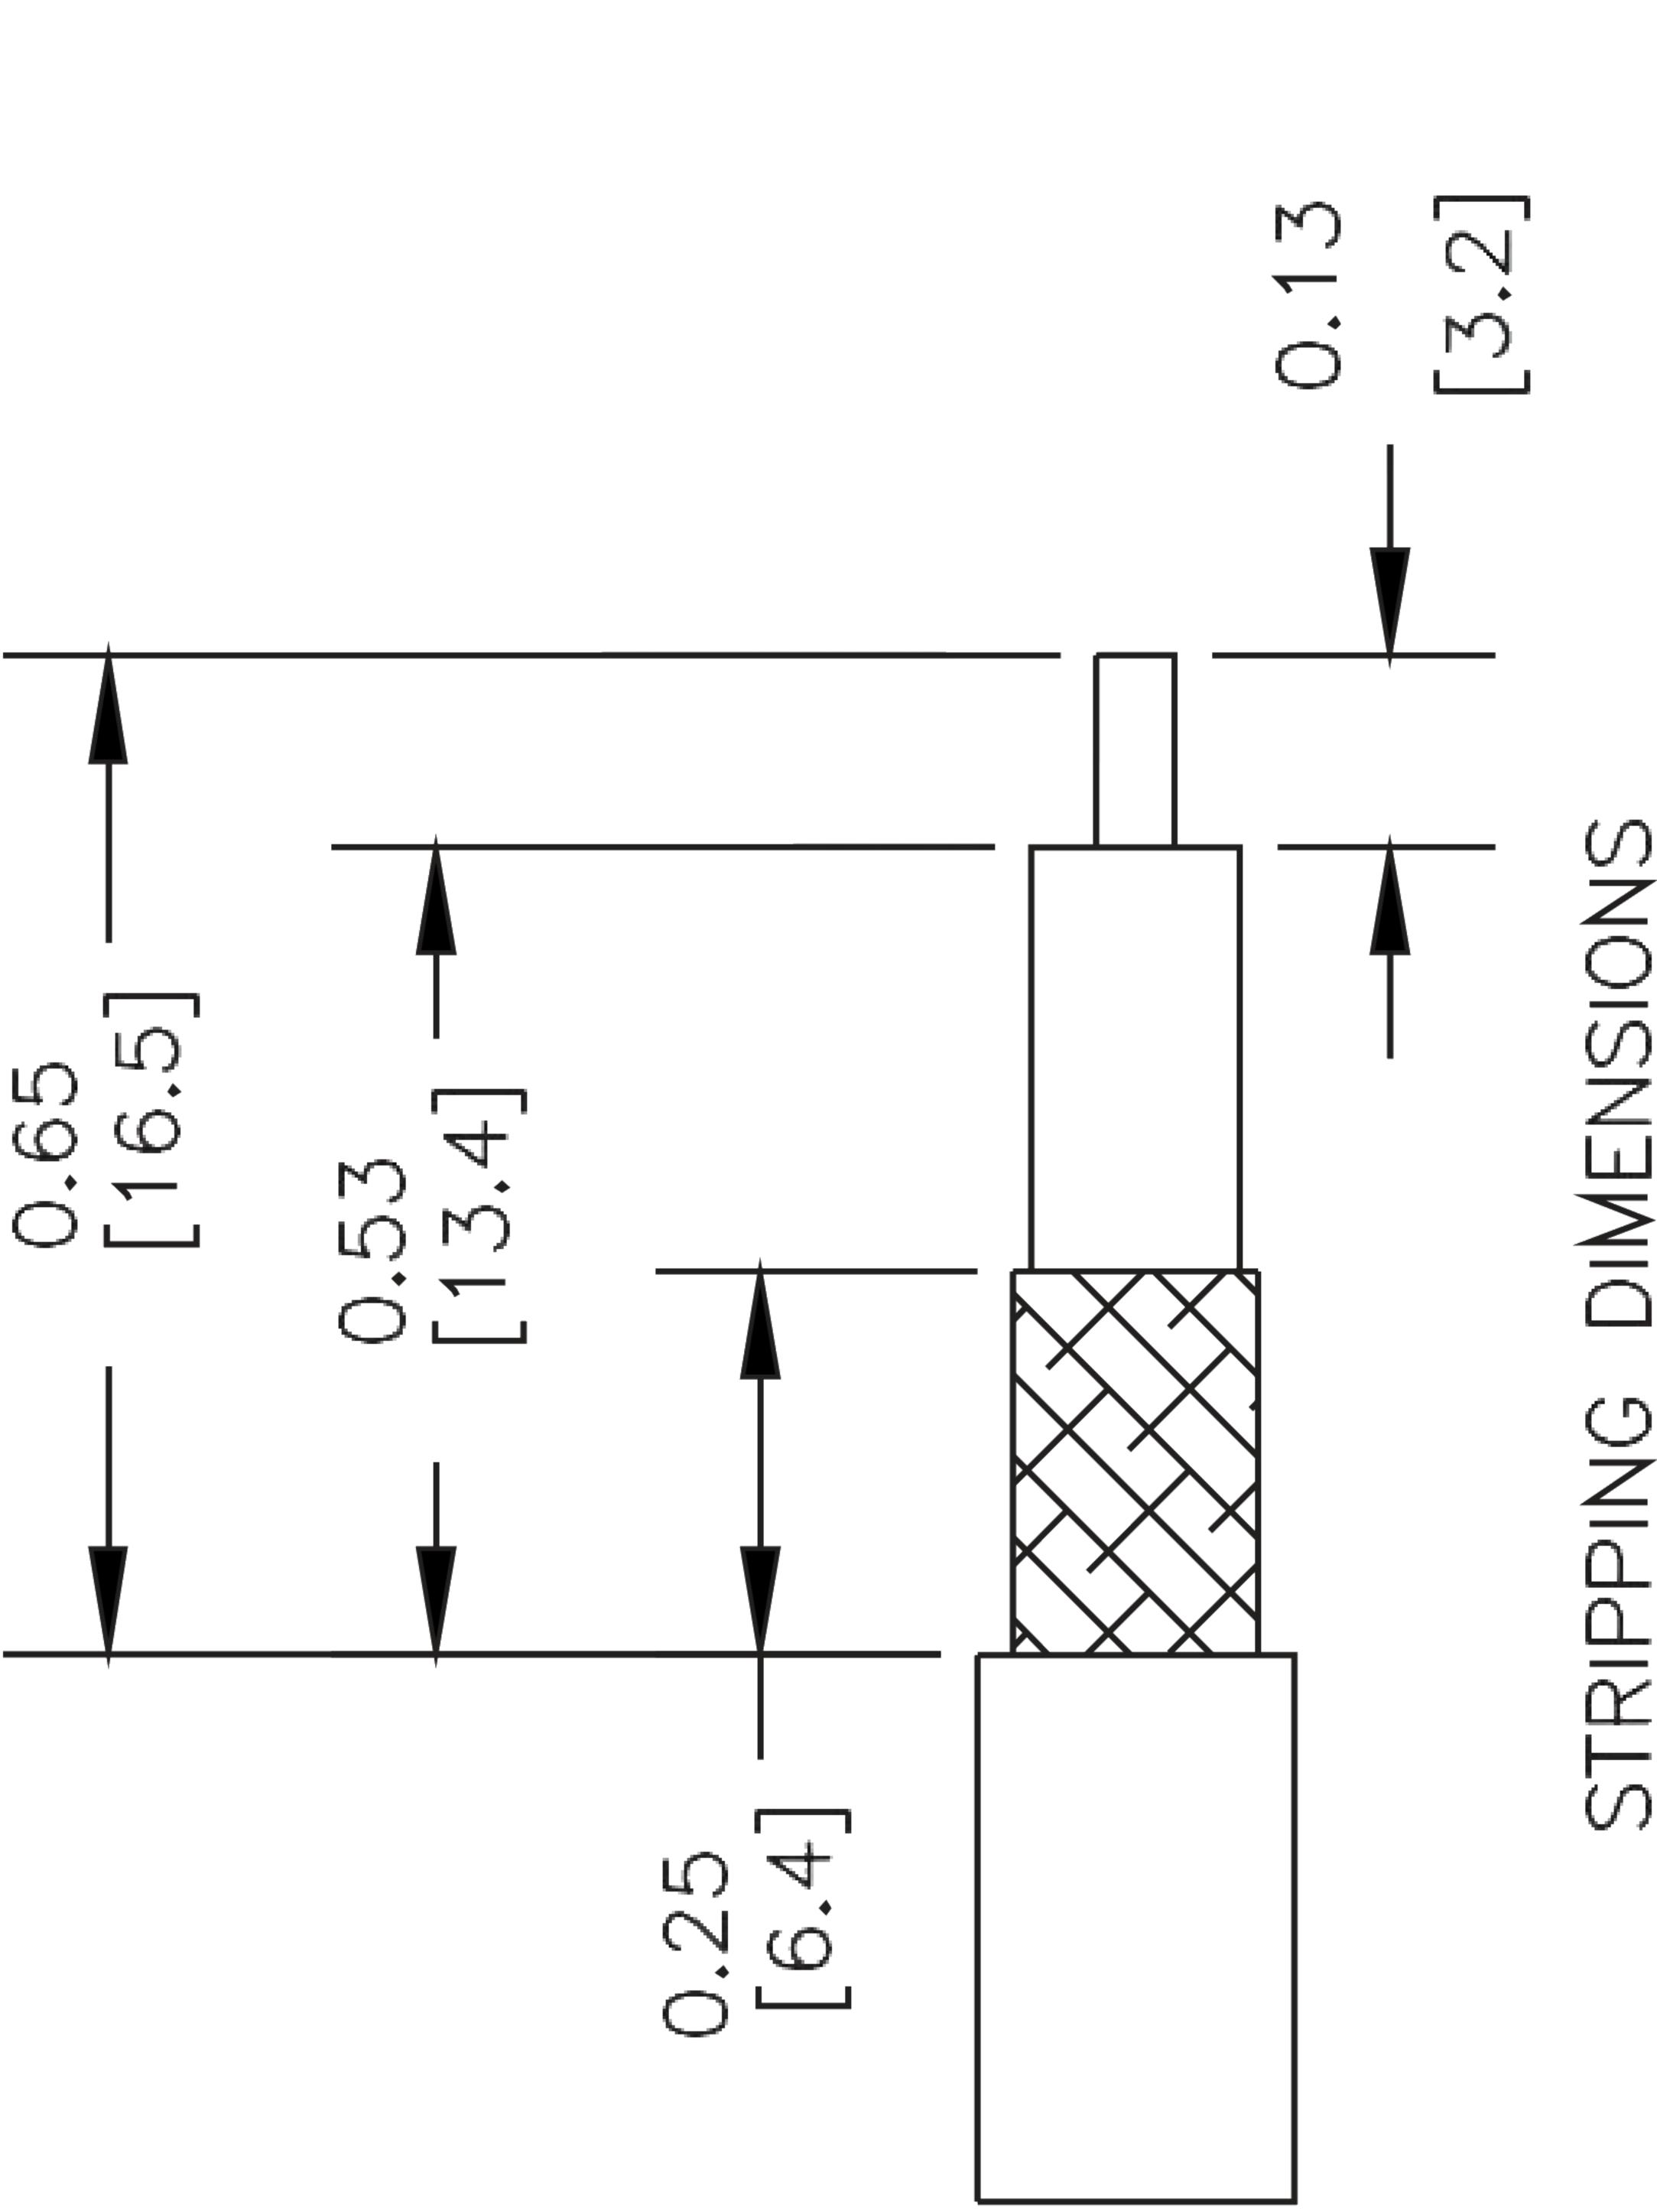

- STRIP CABLE AS SHOWN. SLIDE FERRULE OVE
- 2. INSTALL CABLE INTO BODY OF CONNECTORAN SOFT SOLDER CENTER CONDUCTOR IN PLACE.
- A CRIMP FERRILL R. COREWAY CA

CRIMP SIZE REQUIRED

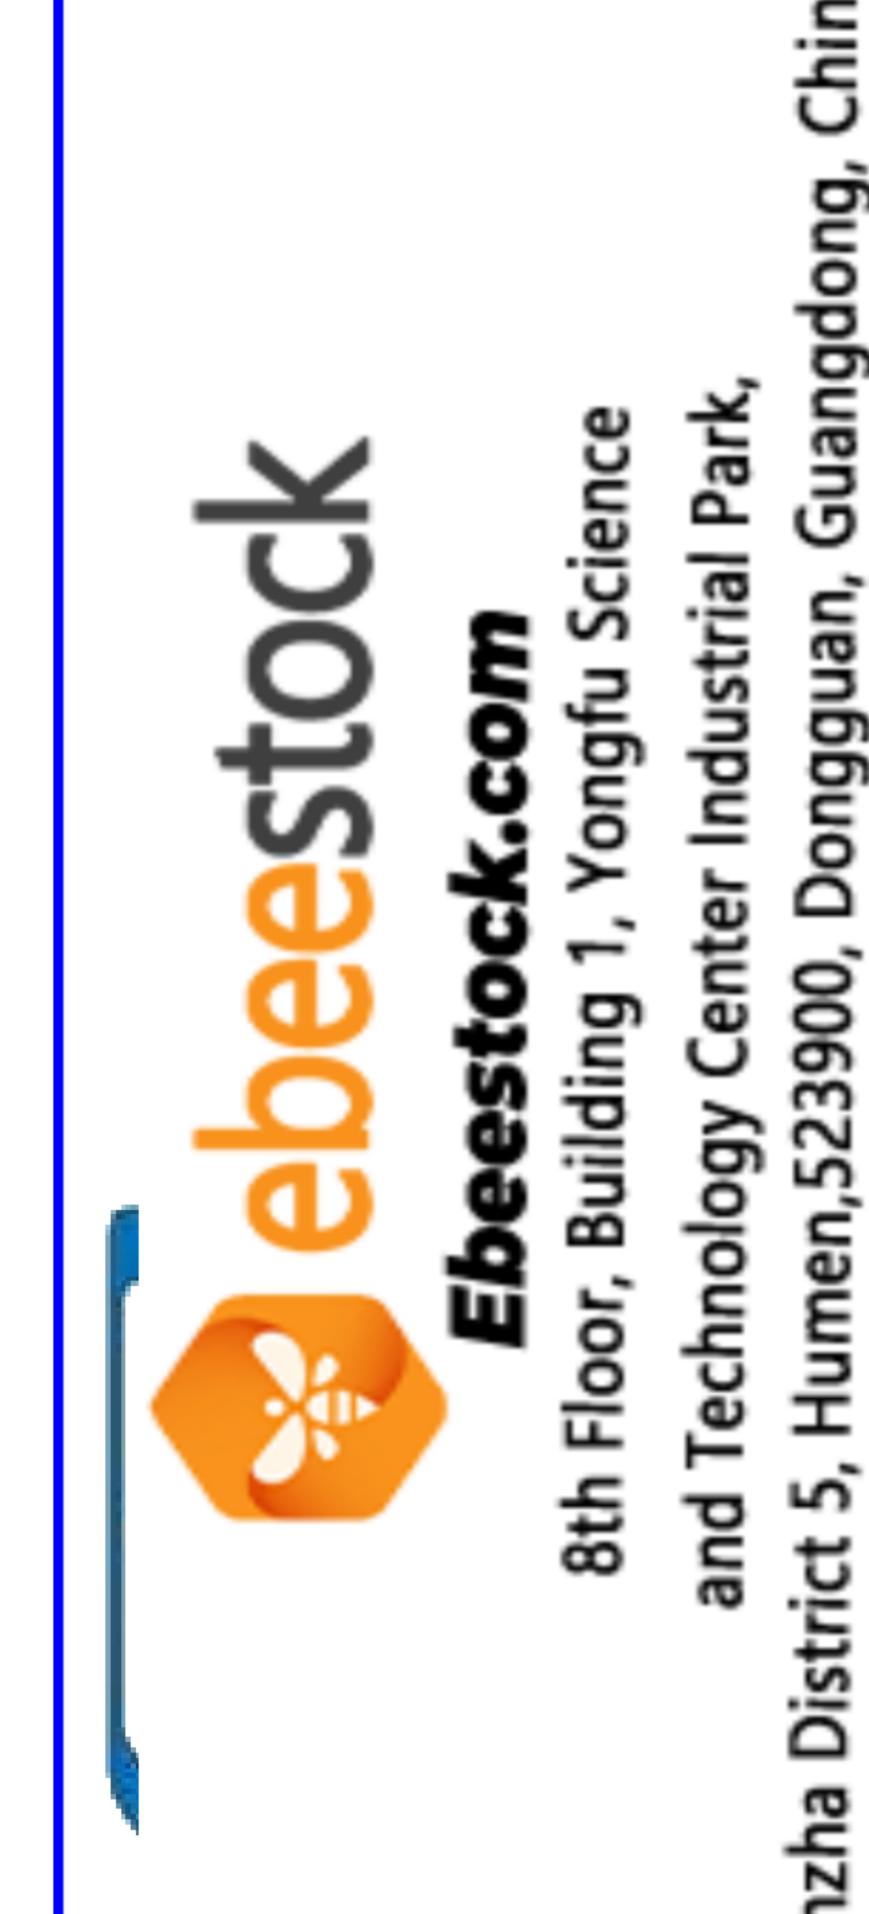

WG TITLE

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TII

3. DIMENSIONS ARE IN INCHES [mmj].

4. FITS MIL-C-17 AND EQUIVALENT CABLES.