

TNC Female Bulkhead Mount Connector Clamp/Solder Attachment for ET38325, ET38324, ET38342, IP68 Rated



RF Connectors Technical Data Sheet

ET11757

Configuration

- TNC Female Connector
- MIL-STD-348
- 50 Ohms
- Straight Body Geometry

- Connector Interface Types: ET38325, ET38324,
- ET38342
- Bulkhead

Features

- Max. Operating Frequency 2 GHz
- Gold Plated Beryllium Copper Contact

IP68 Rated

Applications

- General Purpose Test
- Rack and Panel Mount Applications
- Custom Cable Assemblies

Description

Ebeestock's ET11757 TNC female bulkhead connector with clamp/solder attachment for ET38325, ET38324 and ET-SR047FL is part of our full line of RF components available for same-day shipping. Our TNC female connector operates up to a maximum frequency of 2 GHz. This TNC bulkhead connector allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications. The connector has an IP68 rating to protect against dust and prolonged moisture protection under immersion conditions.

Our TNC female bulkhead connector ET11757 datasheet specifications and drawing with dimensions are shown below in this PDF. Ebeestock's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Ebeestock has the right connector for the job. Ebeestock can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		2	GHz

Mechanical Specifications

Size

 Length
 1 in [25.4 mm]

 Width/Dia.
 0.687 in [17.45 mm]


 Weight
 0.04 lbs [18.14 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: TNC Female Bulkhead Mount Connector Clamp/Solder Attachment for ET38325, ET-SR047AL, ET38342, IP68 Rated ET11757

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



TNC Female Bulkhead Mount Connector Clamp/Solder Attachment for ET38325, ET38324, ET38342, IP68 Rated

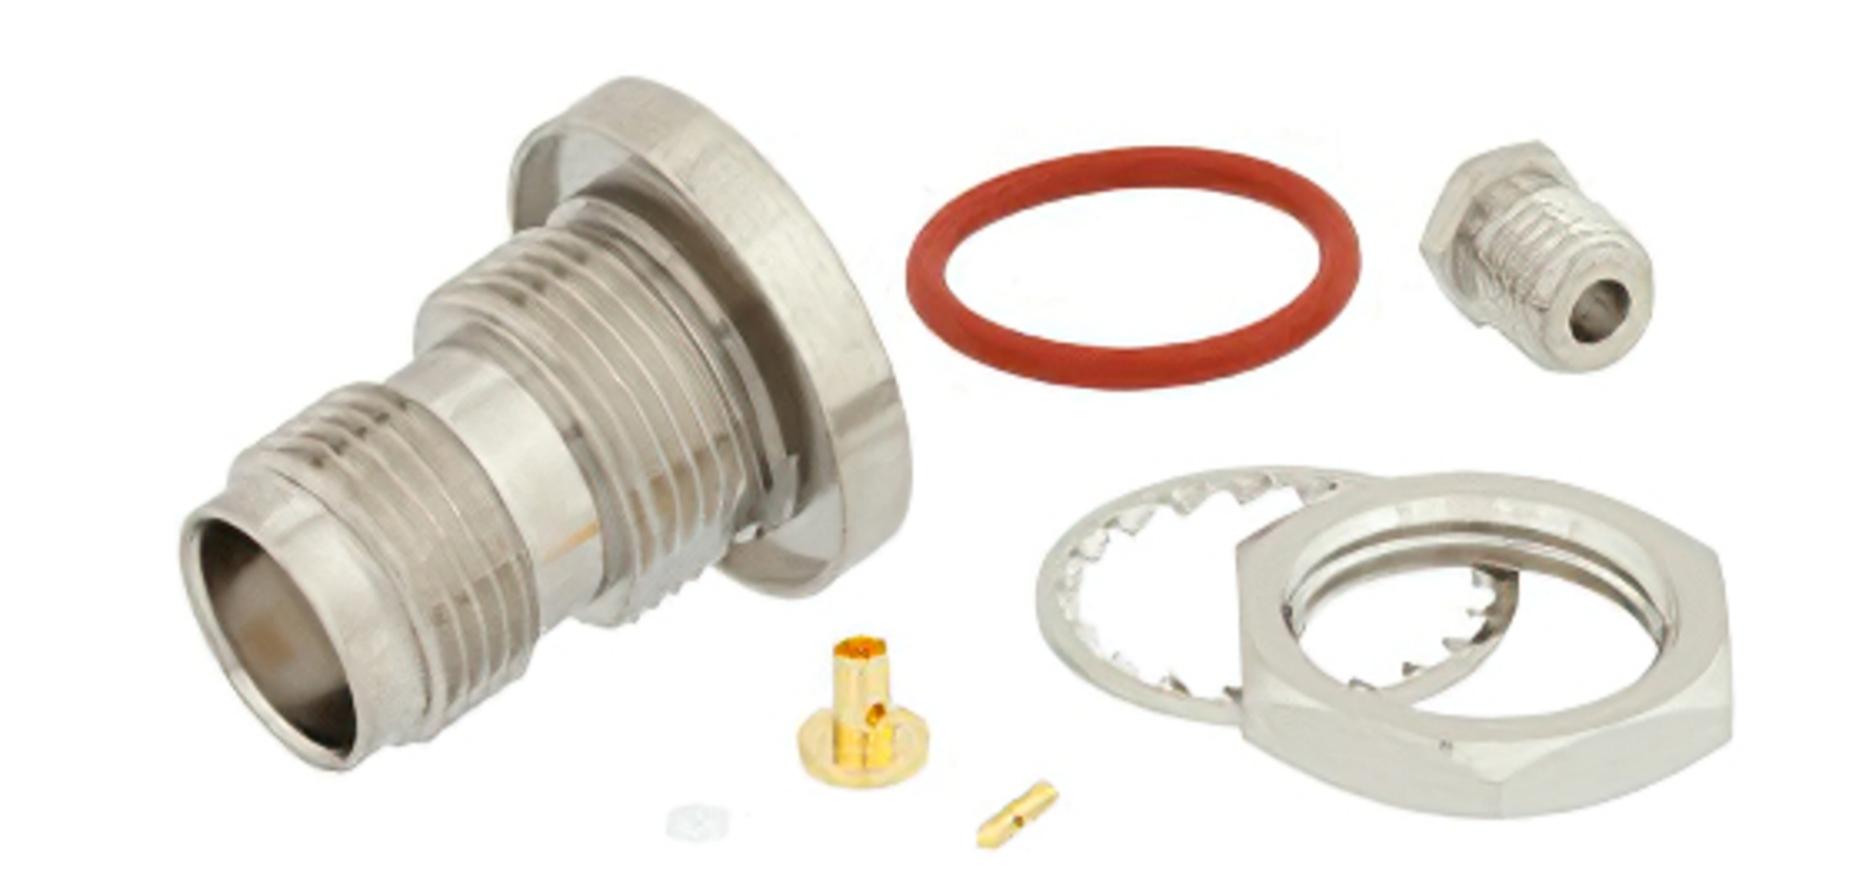

RF Connectors Technical Data Sheet

ET11757

Material Specifications

Description	Material	Plating	
Contact	Beryllium Copper	Gold	
Insulation	PTFE		
Body	Brass	Nickel	

Environmental Specifications

Temperature

Operating Range Ingress Protection (IP) Rating

-65 to +165 deg C IP68 Rated

Compliance Certifications (see product page for current document)

Plotted and Other Data


Notes:


TNC Female Bulkhead Mount Connector Clamp/Solder Attachment for ET38325, ET38324, ET38342, IP68 Rated from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: TNC Female Bulkhead Mount Connector Clamp/Solder Attachment for ET38325, ET38324, ET38342, IP68 Rated ET11757

URL: https://www.ebeestock.com/tnc-female-bulkhead-mount-connector-clamp-solder-attachment-for-pe-047sr-pe-sr047al-pe-sr047fl-ip68-rated-0011757

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

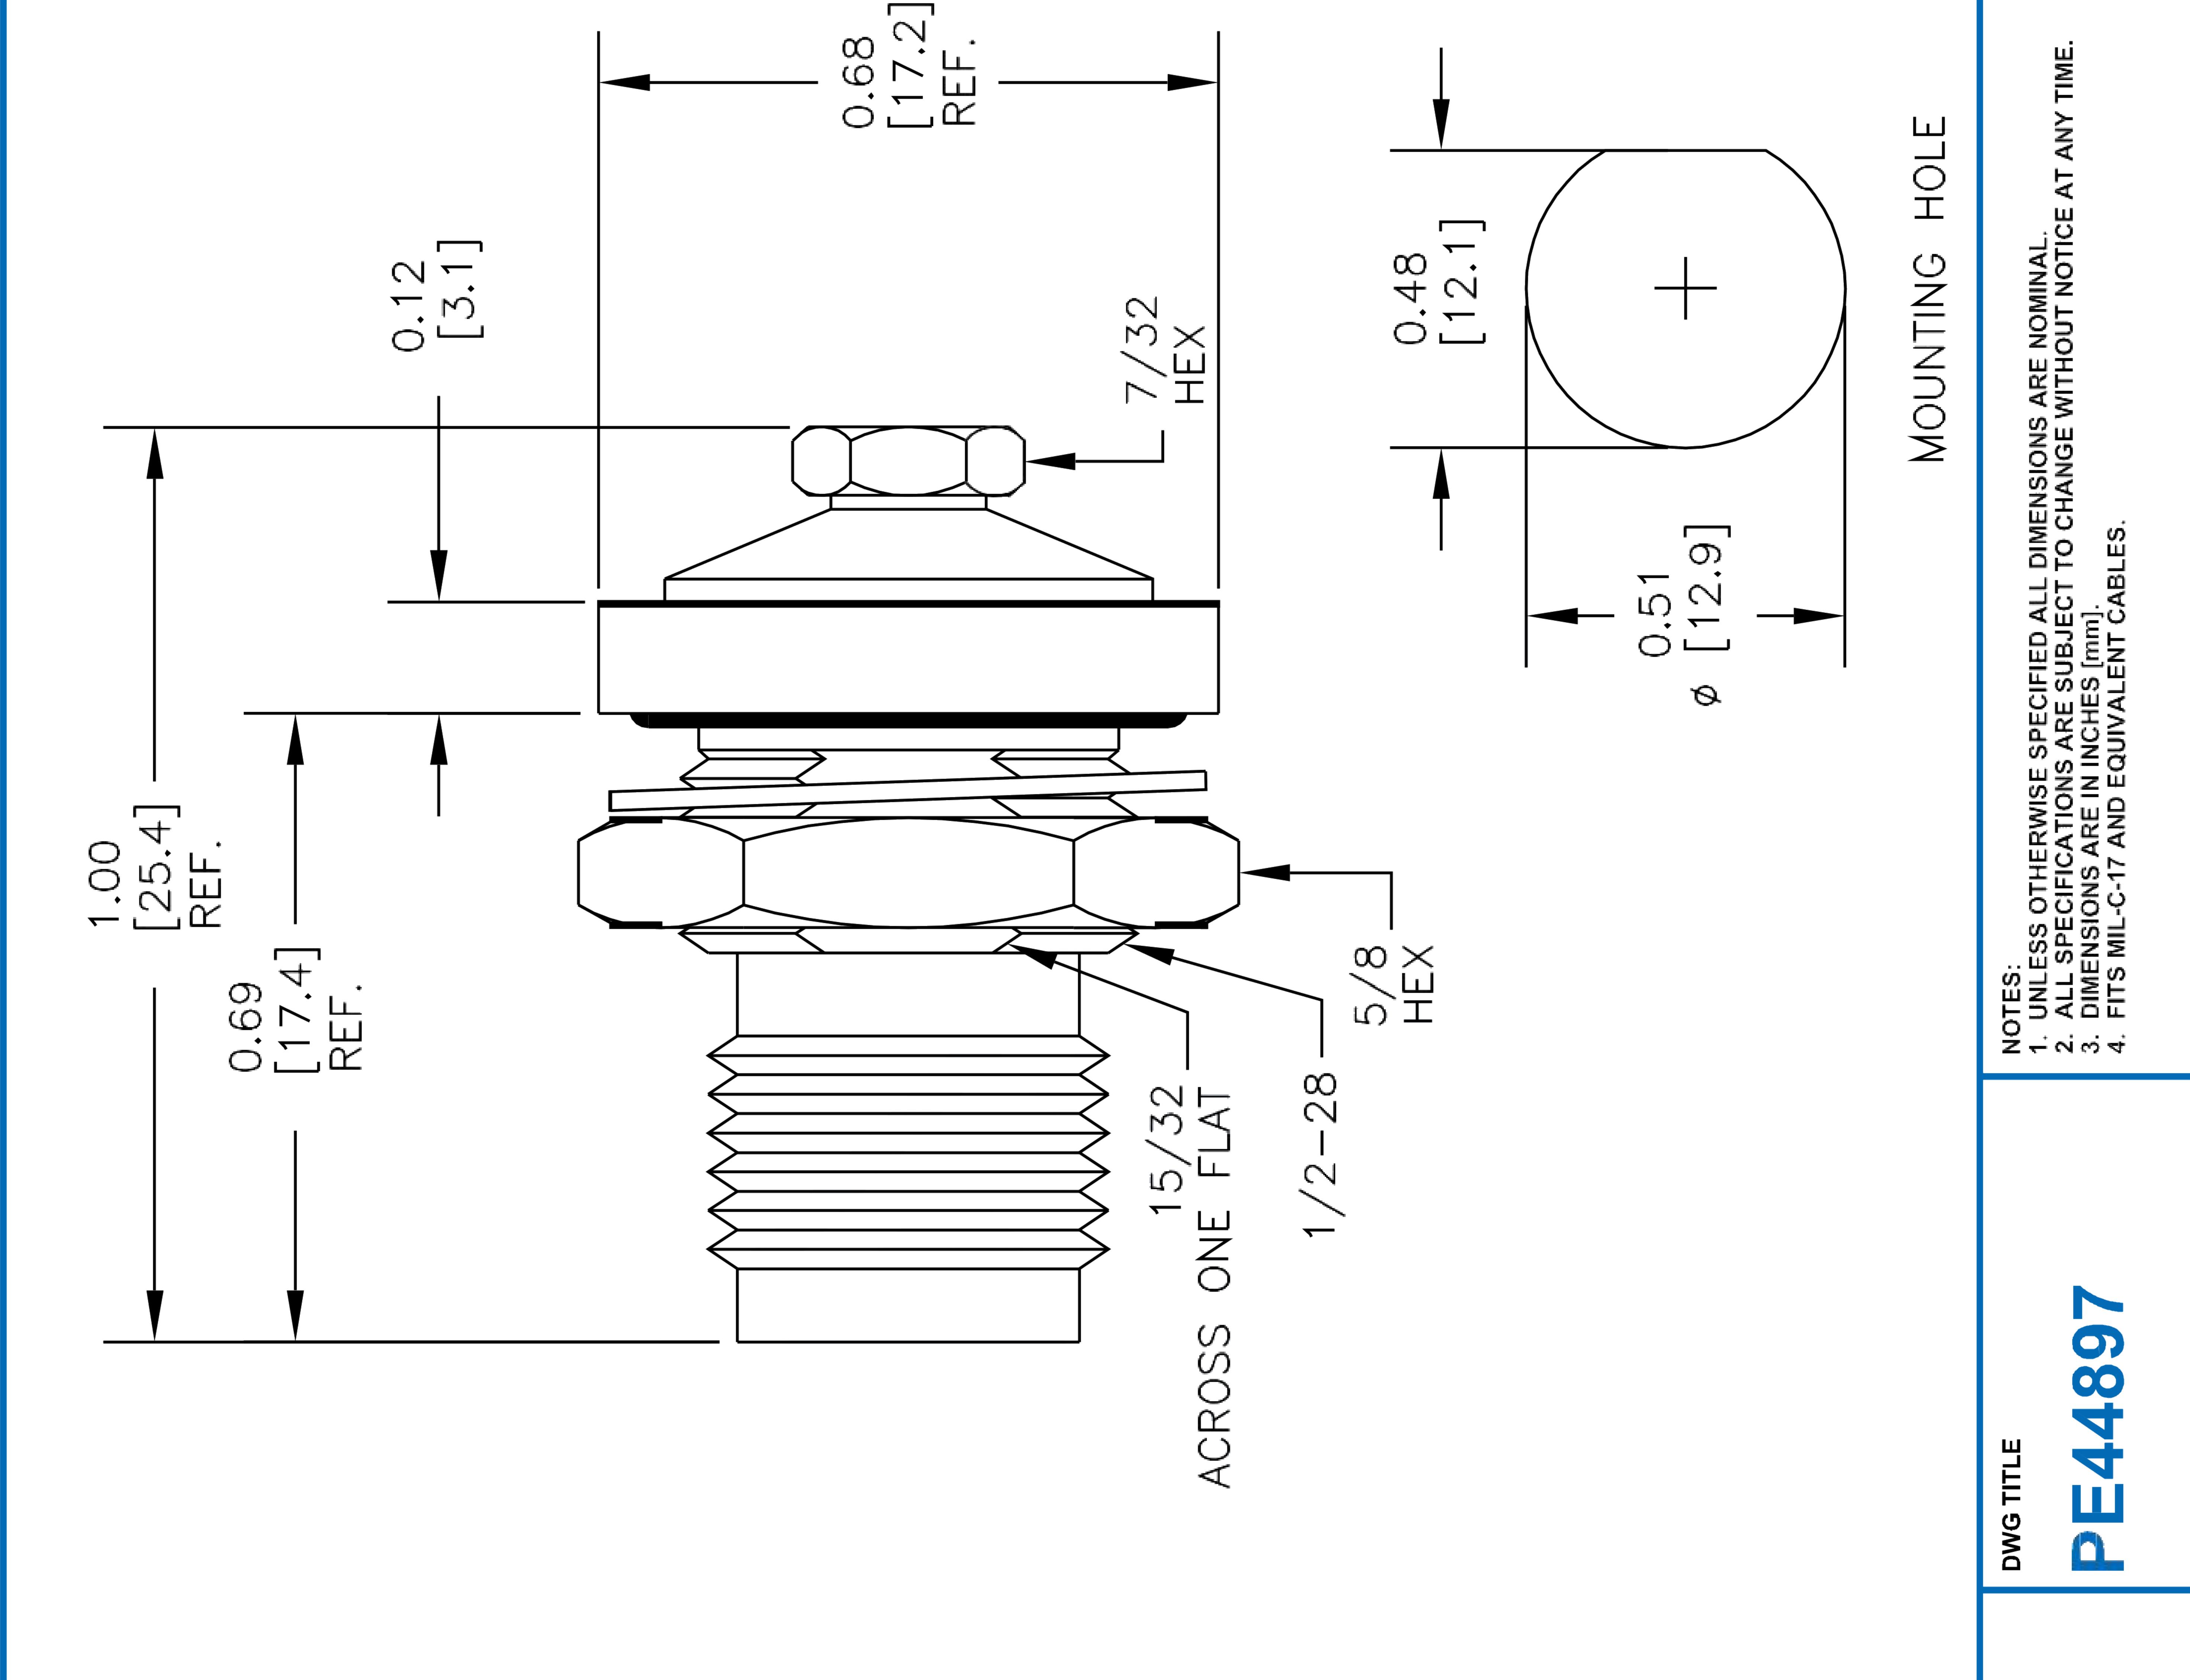

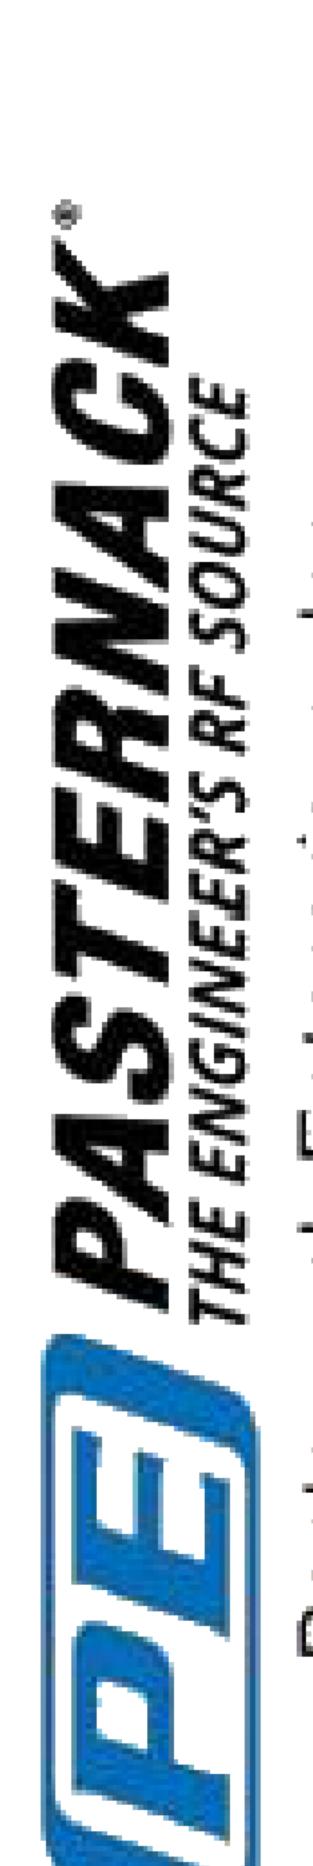

(949) 261-1920 | **Fax**: (949) 26 Isternack.com | **E-Mail:** sales@