



RF Adapters Technical Data Sheet

ET11872

Configuration

- 1.85mm Male Connector 1
- 1.85mm Female Connector 2

- 50 Ohm
- Straight Body Geometry

Features

Max VSWR of 1.35:1 up to 67 GHz

Gold Plated Beryllium Copper Contact

Applications

Connector Saver

General Purpose Test

Description

Ebeestock's ET11872 1.85mm male to 1.85mm female adapter is part of our full line of RF components available for sameday shipping. The 1.85mm connector mates mechanically with commercially available 2.4mm connectors. Our 1.85mm to 1.85mm adapter has a male to female gender configuration. ET11872 1.85mm male to 1.85mm female adapter is gold plated and operates to 67 GHz. The Ebeestock RF adapter provides good VSWR of 1.35:1 maximum. The ET11872 Ebeestock RF adapter can also be used as a connector saver to extend equipment life.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Ebeestock also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		67	GHz
VSWR			1.35:1	
RF Leakage			-90	dB
Input Power (CW)			20	Watts

Electrical Specification Notes: Values at 25°C, sea level.

Mechanical Specifications

Size

 Length
 0.96 in [24.38 mm]

 Width
 0.312 in [7.92 mm]

 Weight
 0.015 lbs [6.8 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 1.85mm Male to 1.85mm Female Adapter ET11872

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.





RF Adapters Technical Data Sheet

ET11872

1 OEmana Canaala
1.85mm Female
Standard
•

Material Specifications

	Connector 1		Connec	tor 2
Description	Material	Plating	Material	Plating
Туре	1.85mm Male		1.85mm Female	
Contact	Beryllium Copper	Gold	Beryllium Copper	Gold
Insulation	PTFE		PTFE	
Outer Conductor			Stainless Steel	Gold
Body	Stainless Steel	Gold		
Coupling Nut	Stainless Steel	Gold		
Coupling Nut	Stainless Steel	Gold		

Environmental Specifications

Temperature

Operating Range

-55 to +125 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 1.85mm Male to 1.85mm Female Adapter ET11872

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.







RF Adapters Technical Data Sheet

ET11872

Typical Performance Data

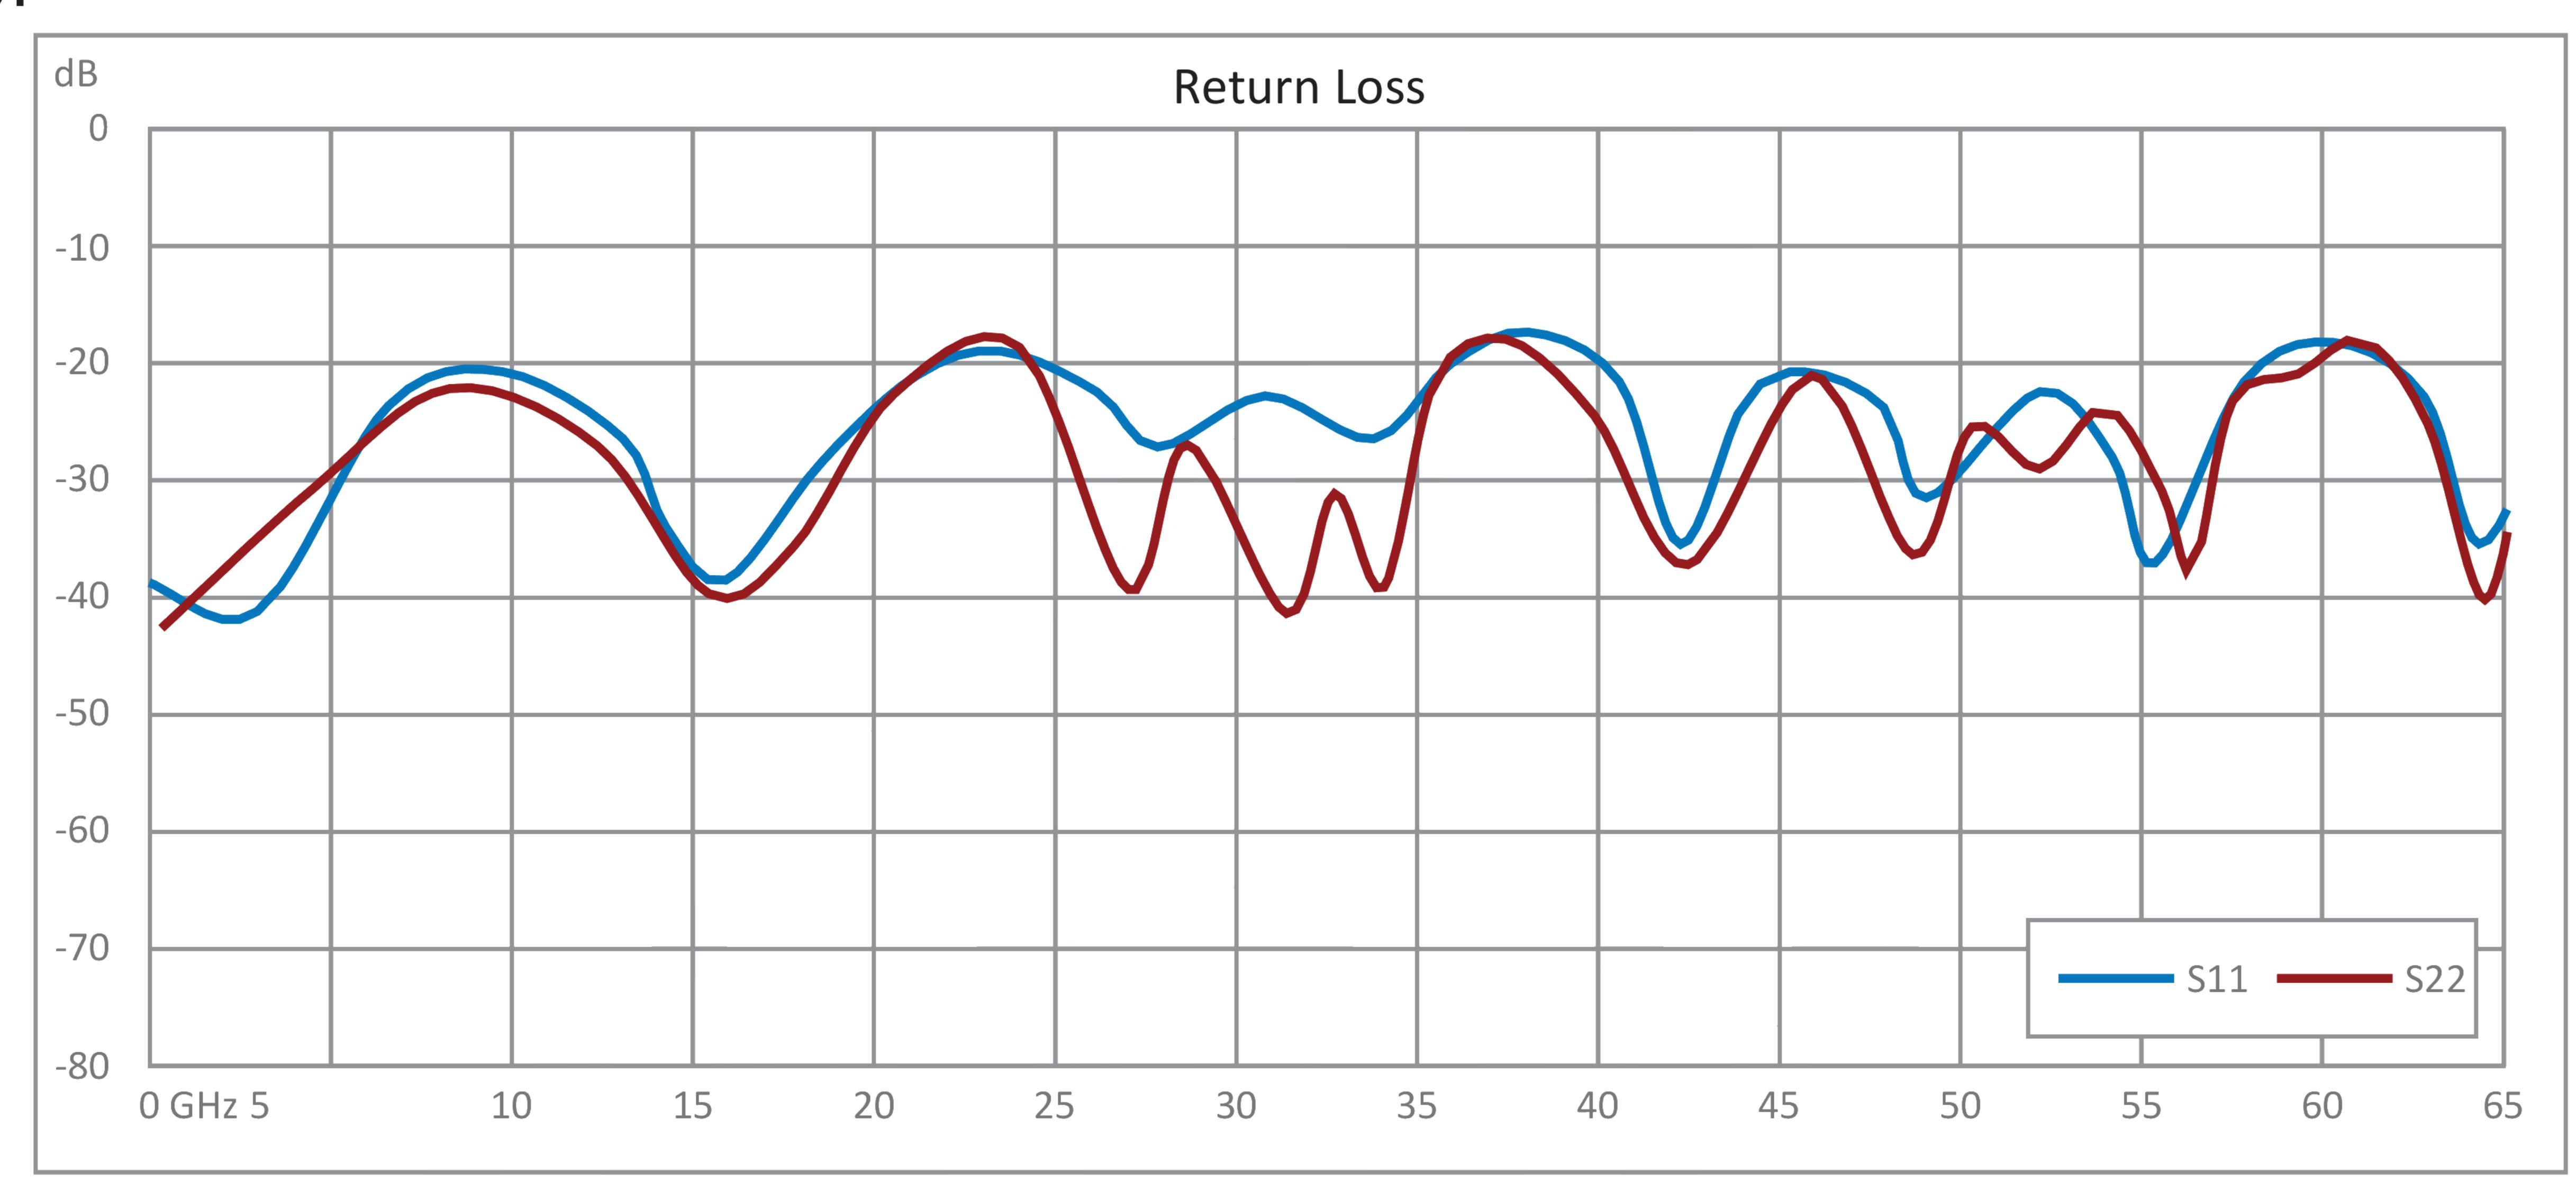

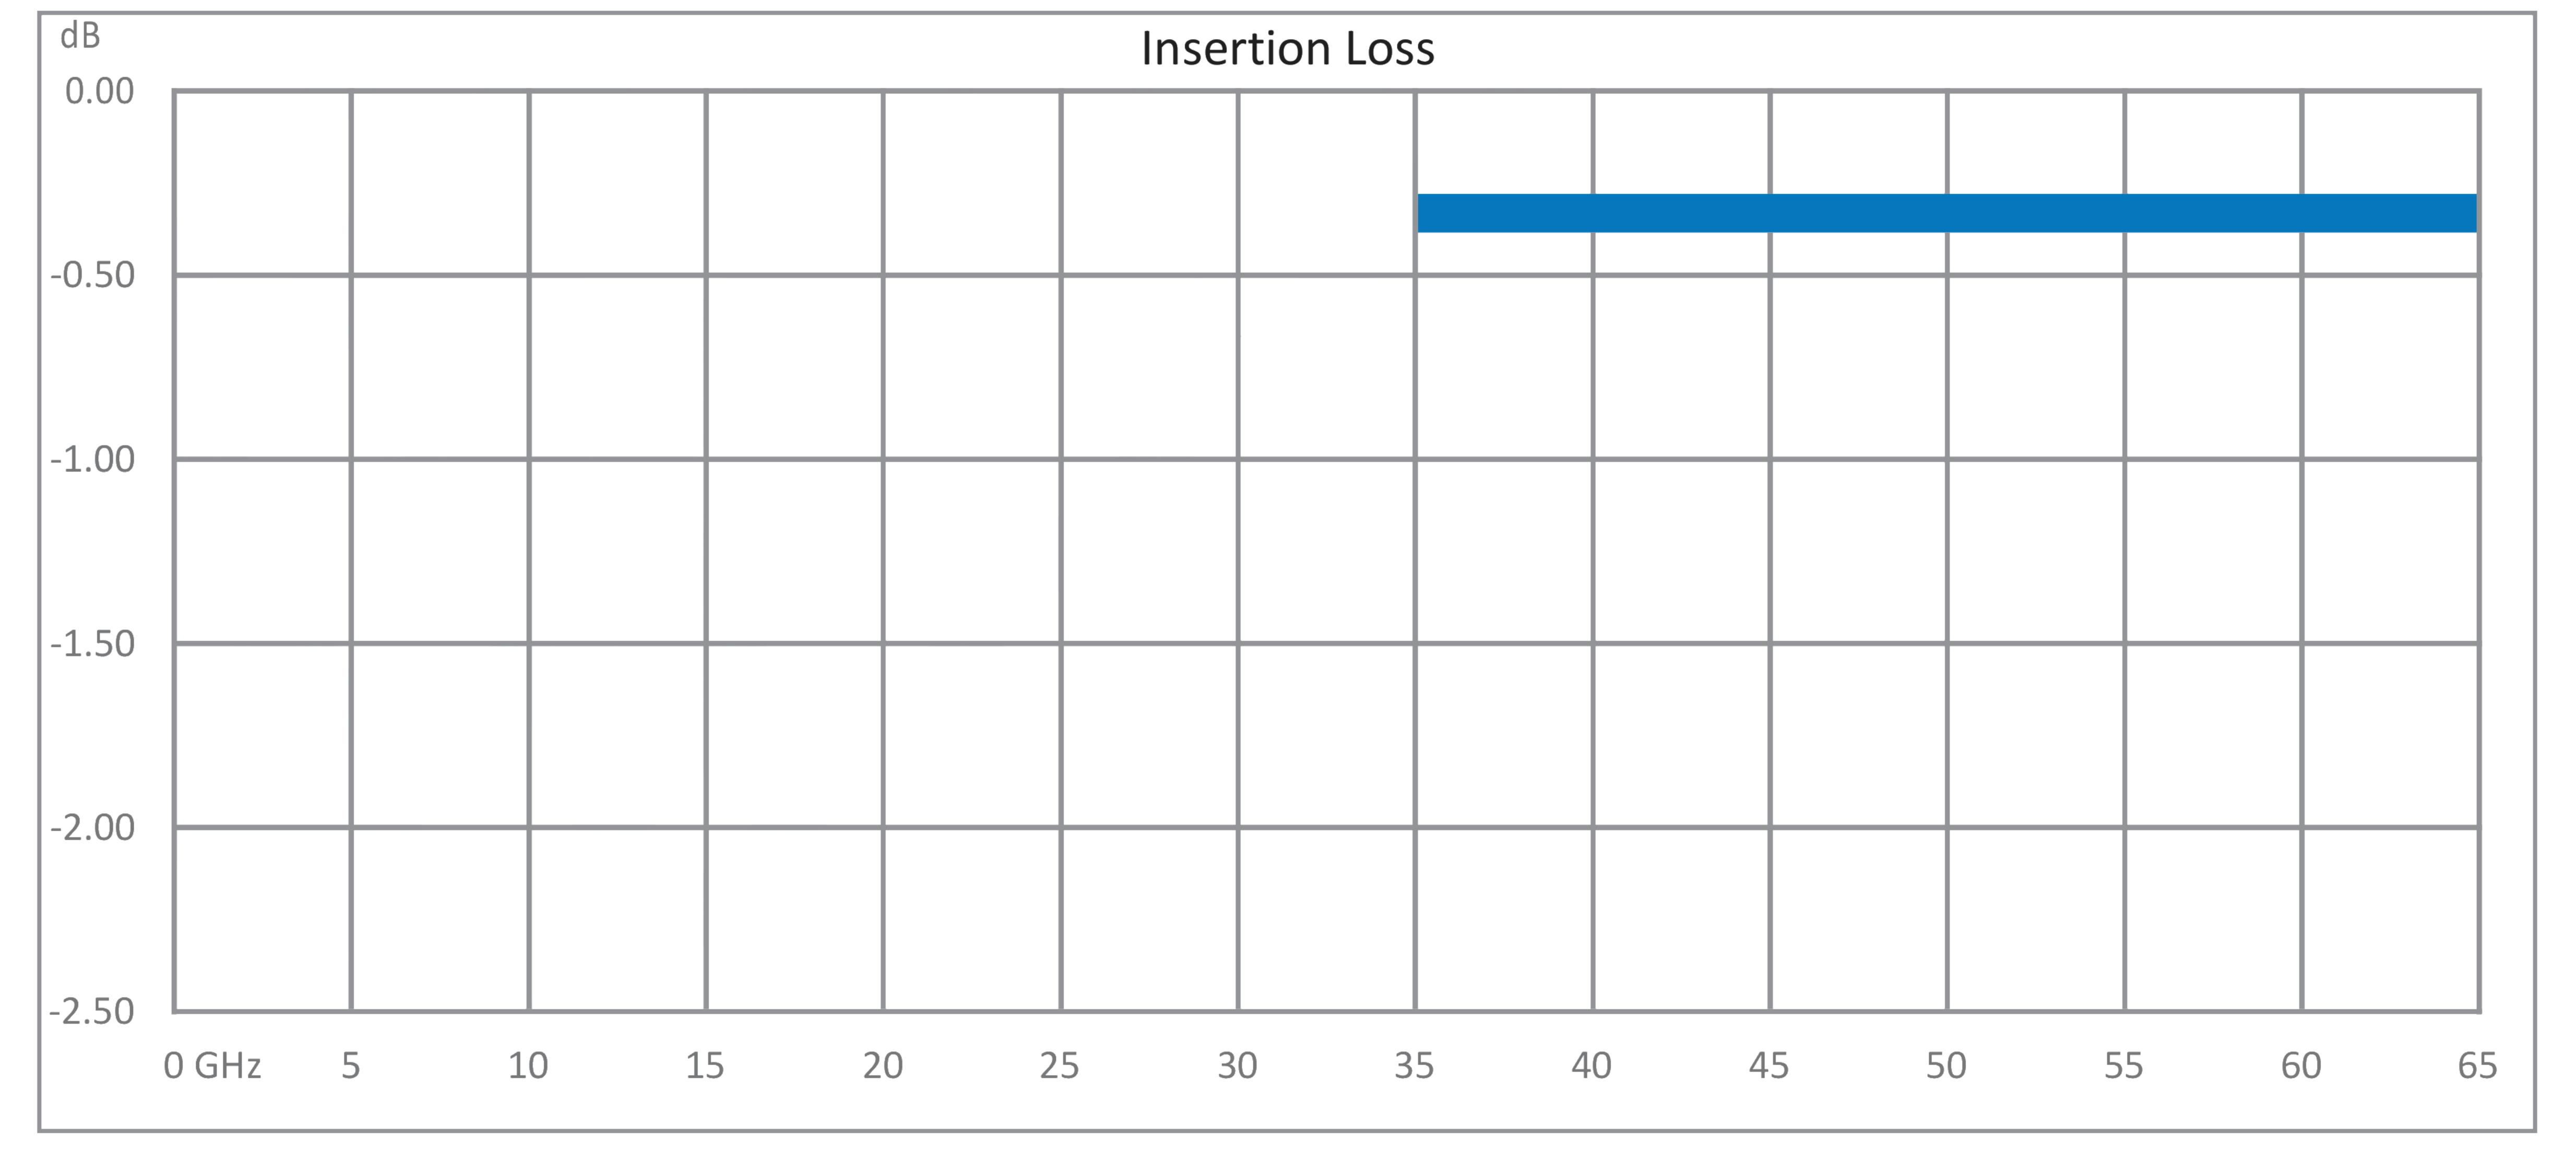

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 1.85mm Male to 1.85mm Female Adapter ET11872





RF Adapters Technical Data Sheet


ET11872

1.85mm Male to 1.85mm Female Adapter from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 1.85mm Male to 1.85mm Female Adapter ET11872

URL: https://www.ebeestock.com/1-85mm-male-to-1-85mm-female-adapter-0011872

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

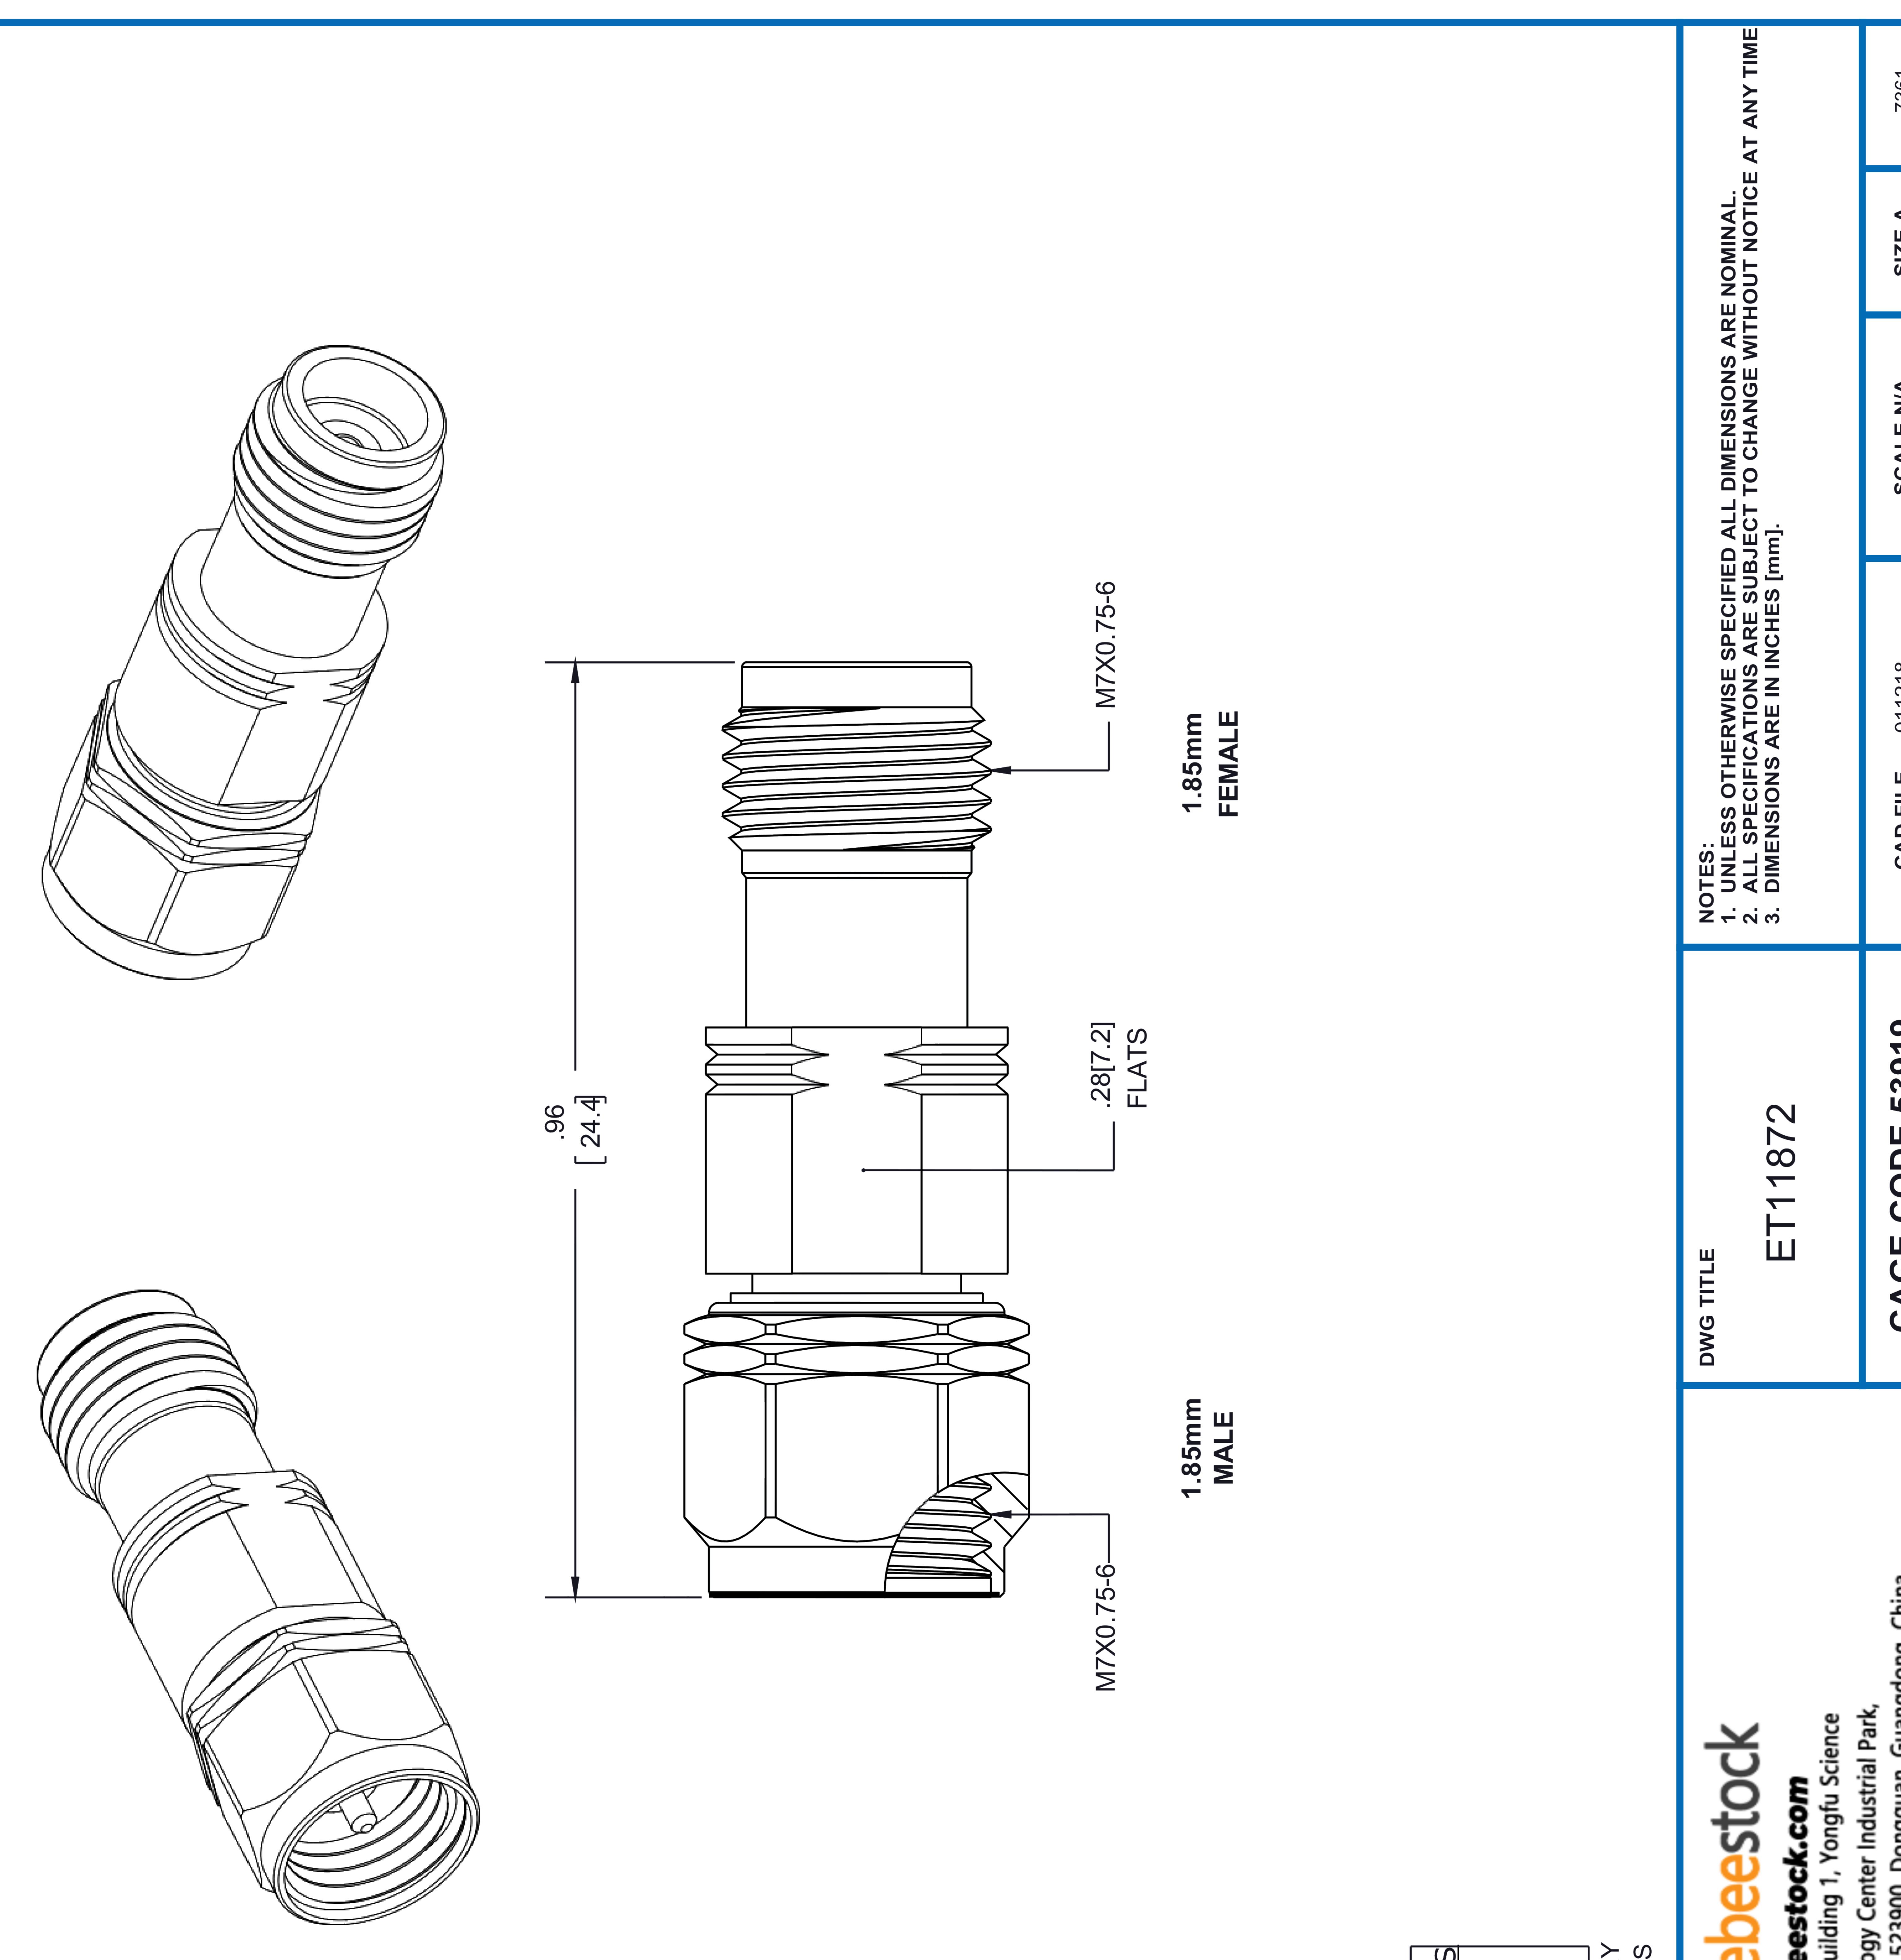

INCHES	
Z	
SZ	
SIO	
Z Z	
⊢ ≻	
JNO	

				٥
+0.03 ★0.03	×× ±0.010	DARD TOLERANCES APPLY	TO DIMENSIONS IN INCHES	

ebeestock	Ebeestock.com	and Technology Center Industrial Park.	nzha District 5, Humen,523900, Dongguan, Guangdong, C	stie: www.ebeestock.com Email: sales@ebeestock.co
			nzha Dist	Webstie