

1.85mm Female to N Female Adapter



RF Adapters Technical Data Sheet

ET1189

2

Configuration

- 1.85mm Female Connector 1
- N Female Connector 2

- 50 Ohms
- Straight Body Geometry

Features

- Max VSWR of 1.25:1 up to 18 GHz
- N Interface compliant with MIL-STD-348
- Gold Plated Beryllium Copper Contact

Applications

- Allows Connection Between Series
- General Purpose Test

Description

Ebeestock's ET11892 1.85mm female to type N female adapter is part of our full line of RF components available for sameday shipping. The 1.85mm connector mates mechanically with commercially available 2.4mm connectors. Our 1.85mm to type N adapter has a female to female gender configuration. ET11892 1.85mm female to type N female adapter operates to 18 GHz. The Ebeestock RF adapter provides excellent VSWR of 1.25:1 maximum.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Ebeestock also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications			
Erequency Range	DC	18	GHz
VSWR		1.25:1	

Mechanical Specifications

Size Length Width Weight	1.73 in [43.9 0.625 in [15. 0.089 lbs [40	88 mm]
Type	1.85mm Female	N Female
Polarity Interface Specification	Standard	Standard MIL-STD-348

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 1.85mm Female to N Female Adapter ET11892

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



1.85mm Female to N Female Adapter



RF Adapters Technical Data Sheet ET11892

Material Specifications

Description	Connector 1		Connector 2	
	Material	Plating	Material	Plating
Туре	1.85mm Female		N Female	
Contact	Beryllium Copper	Gold	Beryllium Copper	Gold
Outer Conductor F	Passivated Stainless Steel		Passivated Stainless Steel	

Environmental Specifications

Temperature

Operating Range


-65 to +125 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

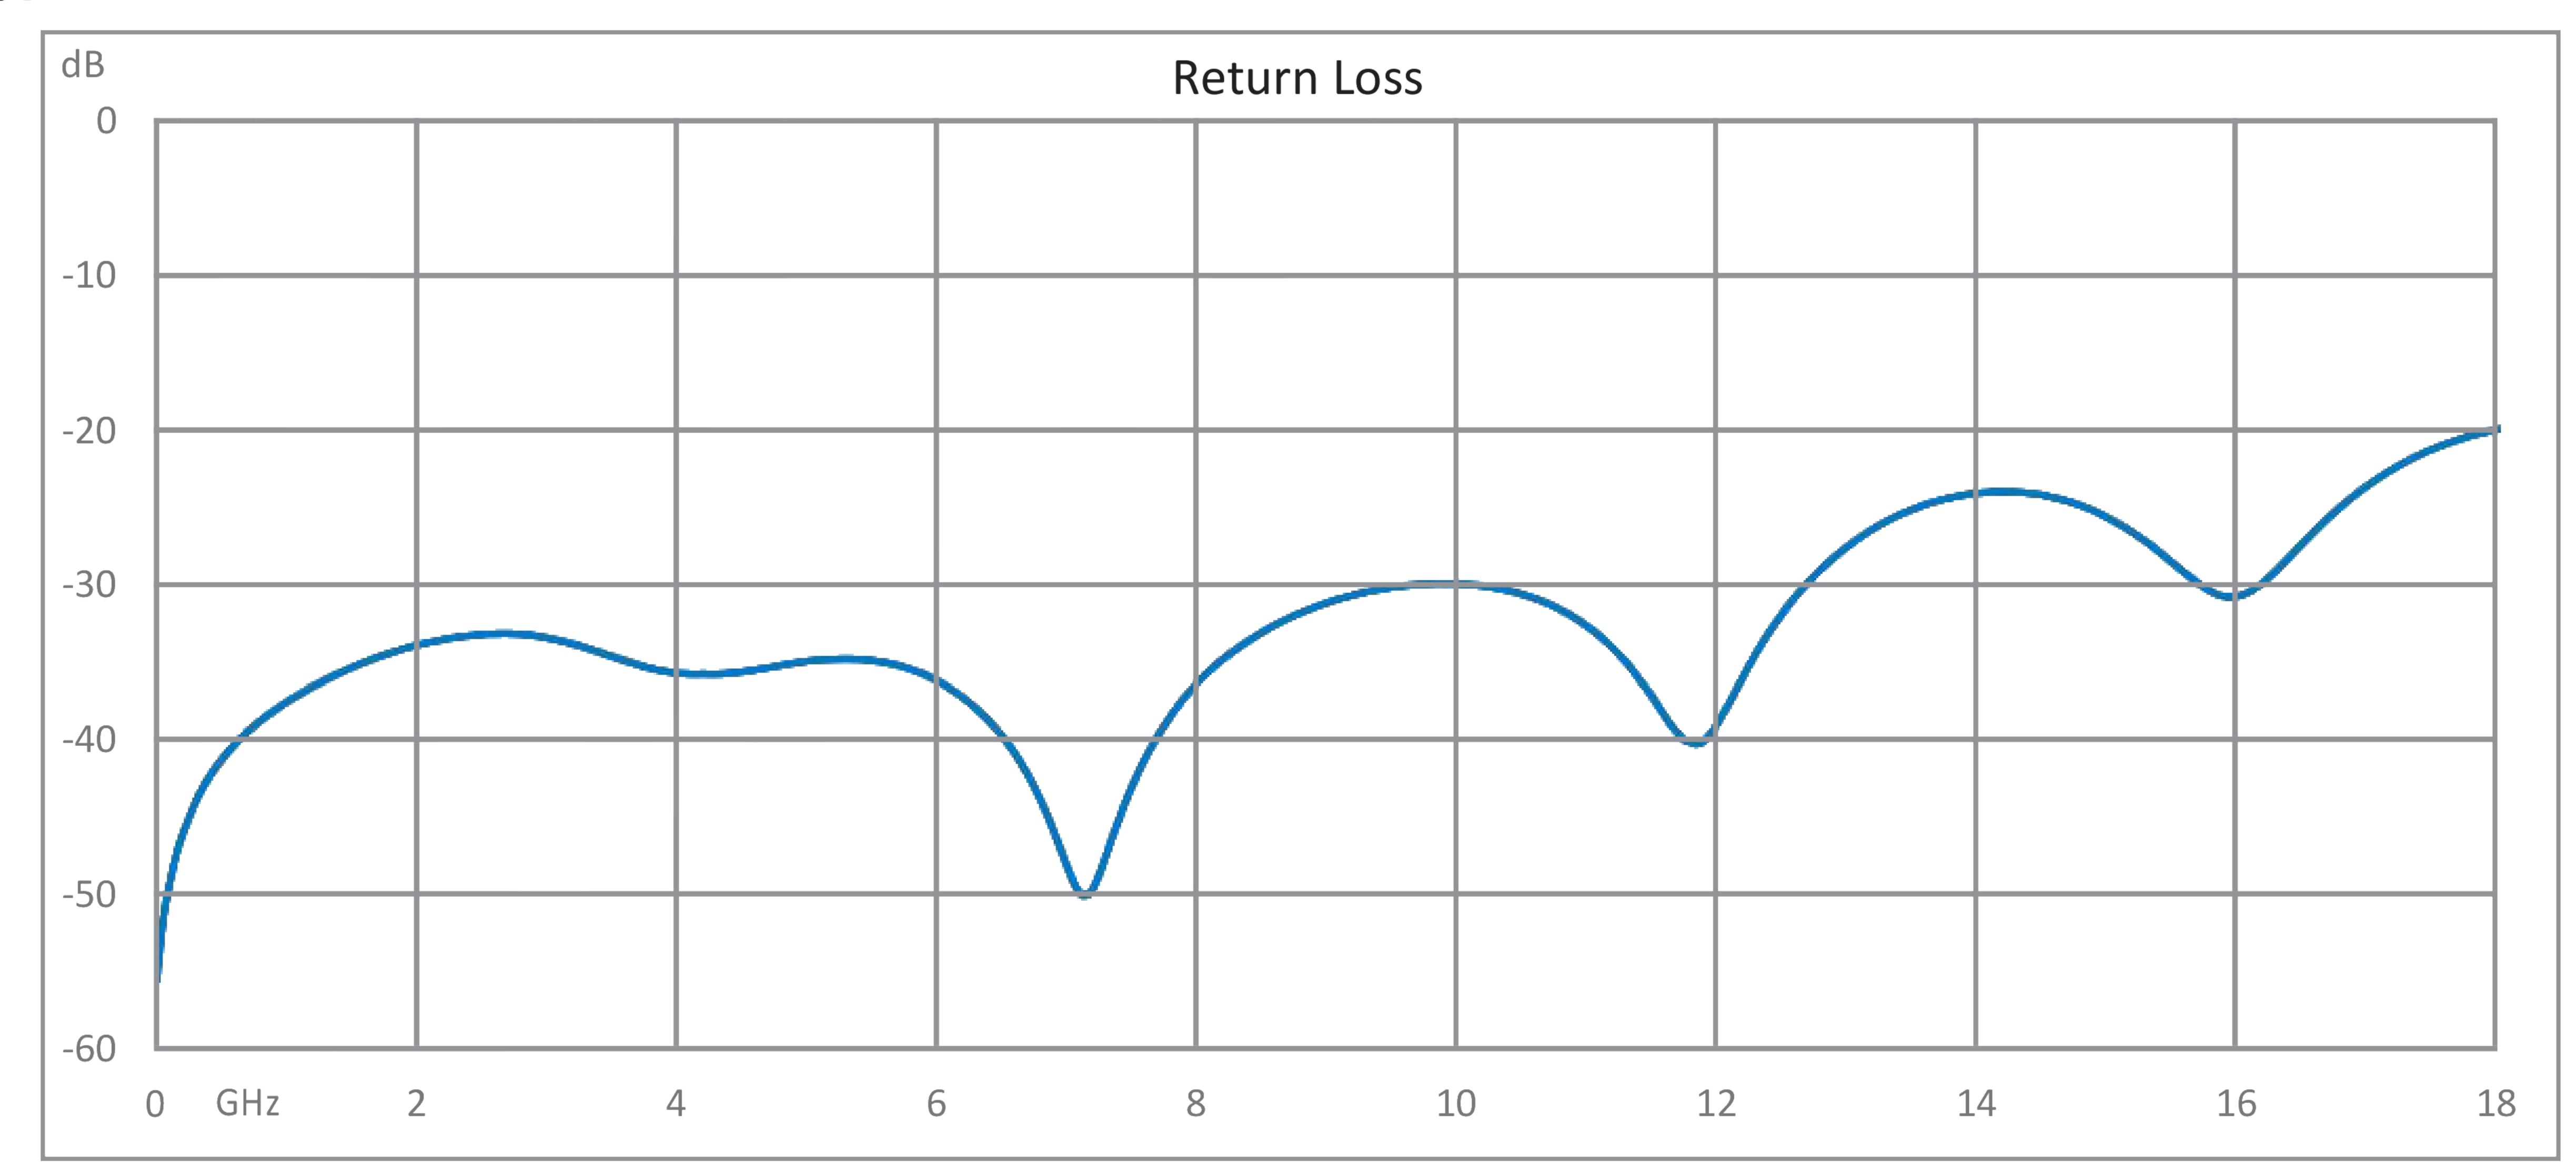

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 1.85mm Female to N Female Adapter ET11892



1.85mm Female to N Female Adapter



RF Adapters Technical Data Sheet ET11892

1.85mm Female to N Female Adapter from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 1.85mm Female to N Female Adapter ET11892

URL: https://www.ebeestock.com/1-85mm-female-to-n-female-adapter-0011892

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

ET11892 CAD Drawing 1.85mm Female to N Female Adapter

