

2.4mm Male to 1.85mm Female Adapter



RF Adapters Technical Data Sheet

ET1190

5

Configuration

- 2.4mm Male Connector 1
- 1.85mm Female Connector 2

- 50 Ohms
- Straight Body Geometry

Features

- Max VSWR of 1.3:1 up to 50 GHz
- Gold over Nickel Plated Beryllium Copper Contact
- Contact Plating per MIL-G-45204

Applications

• Allows Connection Between Series

General Purpose Test

Description

Ebeestock's ET11905 2.4mm male to 1.85mm female adapter is part of our full line of RF components available for sameday shipping. The 2.4mm connector mates mechanically with commercially available 1.85mm (V) connectors. Our 2.4mm to 1.85mm adapter has a male to female gender configuration. ET11905 2.4mm male to 1.85mm female adapter operates to 50 GHz. The Ebeestock RF adapter provides good VSWR of 1.3:1 maximum.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Ebeestock also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

ectrical Specifications			
Erequency Range	DC	50	GHz
VSWR		1.3:1	
Insertion Loss		0.36	dB

Electrical Specification Notes: Values at 25°C, sea level. VSWR = 1.05 + 0.005*(fGHz). Insertion Loss (dB) = 0.05*sqrt(fGHz).

Mechanical Specifications

Size Length Width

Weight

0.773 in [19.63 mm] 0.312 in [7.92 mm] 0.013 lbs [5.9 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 2.4mm Male to 1.85mm Female Adapter ET11905

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



2.4mm Male to 1.85mm Female Adapter



RF Adapters Technical Data Sheet ET11905

1.85mm Female	
Standard	
500	
5/16 in.	
8 to 10 in-lbs [0.90 to 1.13 Nm]	

Material Specifications

	Connector 1		Connector 2	
Descriptio	n Material	Plating	Material	Plating
Гуре	2.4mm Male		1.85mm Female	
Contact	Beryllium Copper	Gold over Nickel	Beryllium Copper	Gold over Nickel
		MIL-G-45204		MIL-G-45204
nsulation	Oxide-Noryl		Oxide-Noryl	
Outer Conductor			Passivated Stainless Steel	
				ASTM A380
Body	Passivated Stainless Steel			
		ASTM A380		
Coupling Nut	Passivated Stainless Steel			
		ASTM A380		

Environmental Specifications

Temperature

Operating Range -55 to +100 deg C

Vibration

MIL-STD-202, Method 204, Cond. D (20G's)
MIL-STD-202, Method 101, Cond. B, 5% salt solution Salt Spray

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 2.4mm Male to 1.85mm Female Adapter ET11905



2.4mm Male to 1.85mm Female Adapter



RF Adapters Technical Data Sheet ET11905


2.4mm Male to 1.85mm Female Adapter from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 2.4mm Male to 1.85mm Female Adapter ET11905

URL: https://www.ebeestock.com/2-4mm-male-to-1-85mm-female-adapter-0011905

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

ET11905 CAD Drawing 2.4mm Male to 1.85mm Female Adapter

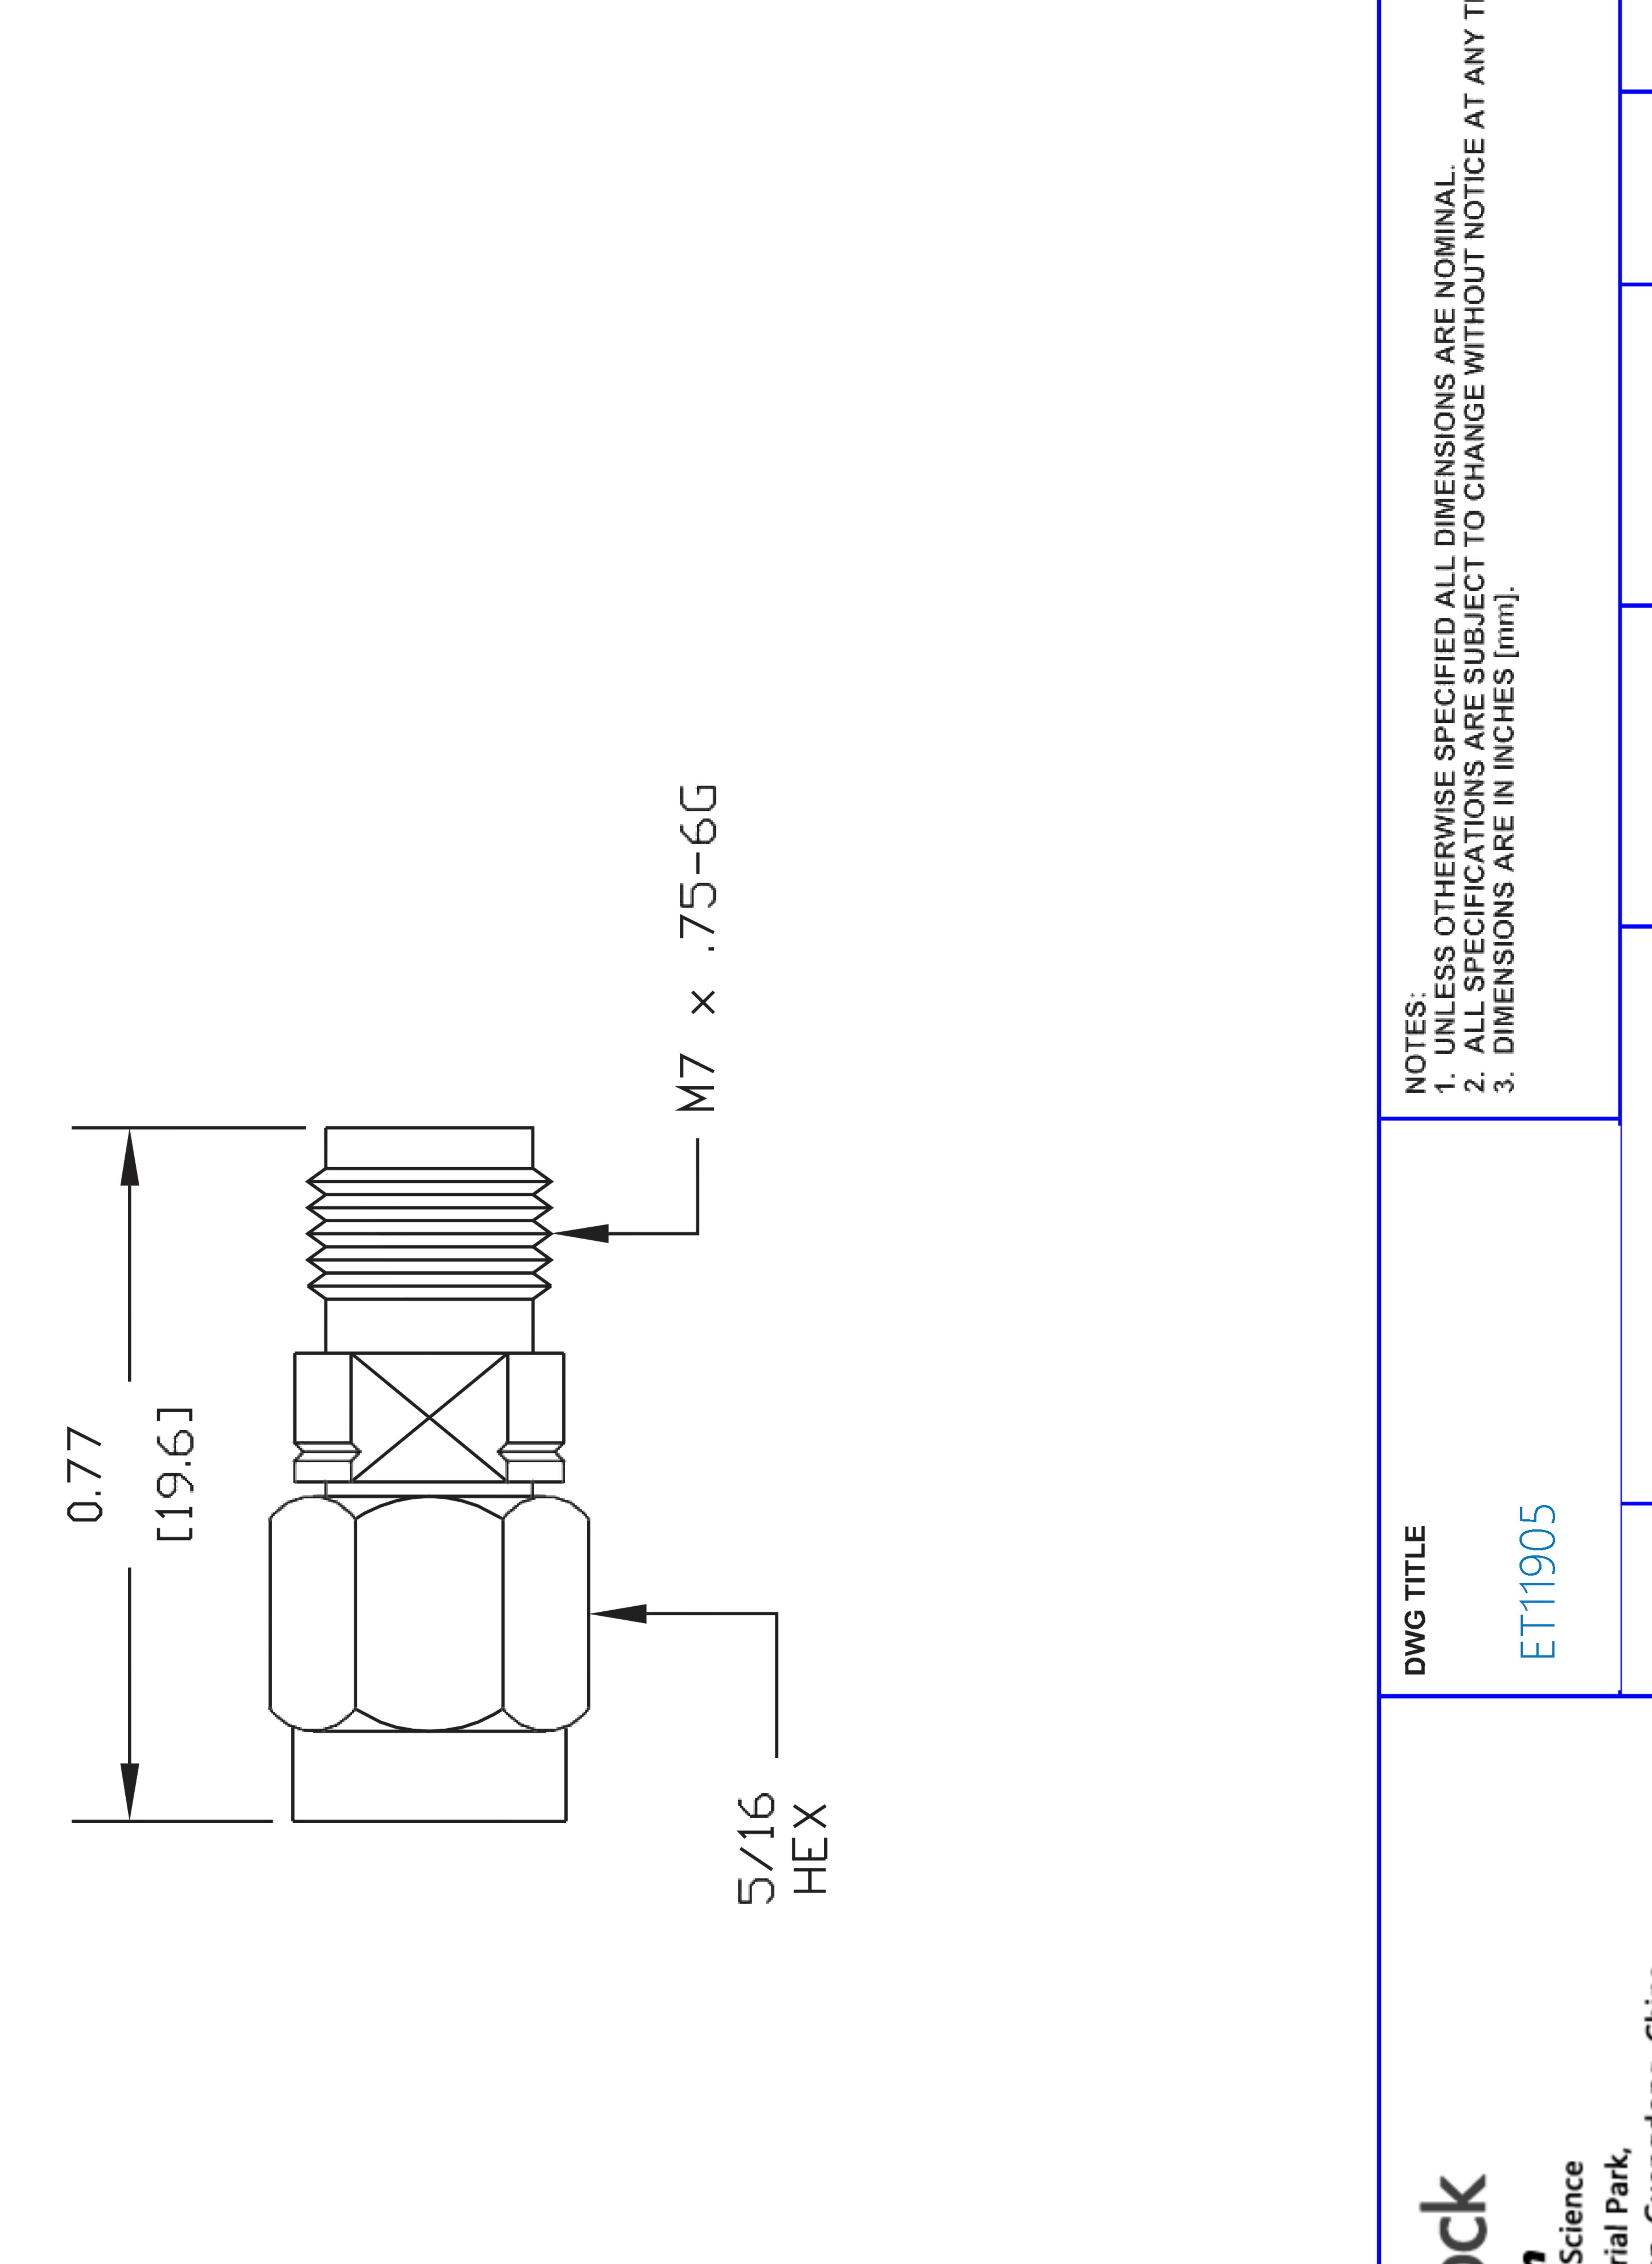

Ebestock.com

8th Floor, Building 1, Yongfu Science
and Technology Center Industrial Park
strict 5, Humen,523900, Dongguan, Guan