

2.4mm Male to 2.4mm Male Adapter



RF Adapters Technical Data Sheet

ET1192

9

Configuration

- 2.4mm Male Connector 1
- 2.4mm Male Connector 2

• Max VSWR of 1.3:1 up to 50 GHz

- 50 Ohms
- Straight Body Geometry

Applications

General Purpose Test

Gold Plated Beryllium Copper Contact

Description

Features

Ebeestock's ET11929 2.4mm male to 2.4mm male adapter is part of our full line of RF components available for same-day shipping. The 2.4mm connector mates mechanically with commercially available 1.85mm (V) connectors. Our 2.4mm to 2.4mm adapter has a male to male gender configuration. ET11929 2.4mm male to 2.4mm male adapter operates to 50 GHz. The Ebeestock RF adapter provides good VSWR of 1.3:1 maximum.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Ebeestock also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

requency Range		DC	50	GHz
SWR			1.3:1	
erformance by Fred	HIENCV			

Electrical Specification Notes: Values at 25° sea level.

Mechanical Specifications

Size

Length 0.83 in [21.08 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 2.4mm Male to 2.4mm Male Adapter ET11929

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.

Webstie:www.ebeestock.com Email:sales@ebeestock.com



2.4mm Male to 2.4mm Male Adapter



RF Adapters Technical Data Sheet ET11929

 Width
 0.312 in [7.92 mm]

 Weight
 0.017 lbs [7.71 g]

Description	Connector 1	Connector 2	
Type	2.4mm Male	2.4mm Male	
Polarity	Standard	Standard	
Hex Size	5/16 inch	5/16 inch	

Material Specifications

Description	Connector 1		Connector 2		
	Material	Plating	Material	Plating	
Туре	2.4mm Male		2.4mm Male		
Contact	Beryllium Copper	Gold	Beryllium Copper	Gold	
Outer Conductor Pa	assivated Stainless Steel		Passivated Stainless Steel		

Environmental Specifications

Temperature

Operating Range -65 to +125 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 2.4mm Male to 2.4mm Male Adapter ET11929




2.4mm Male to 2.4mm Male Adapter



RF Adapters Technical Data Sheet ET11929

Typical Performance Data

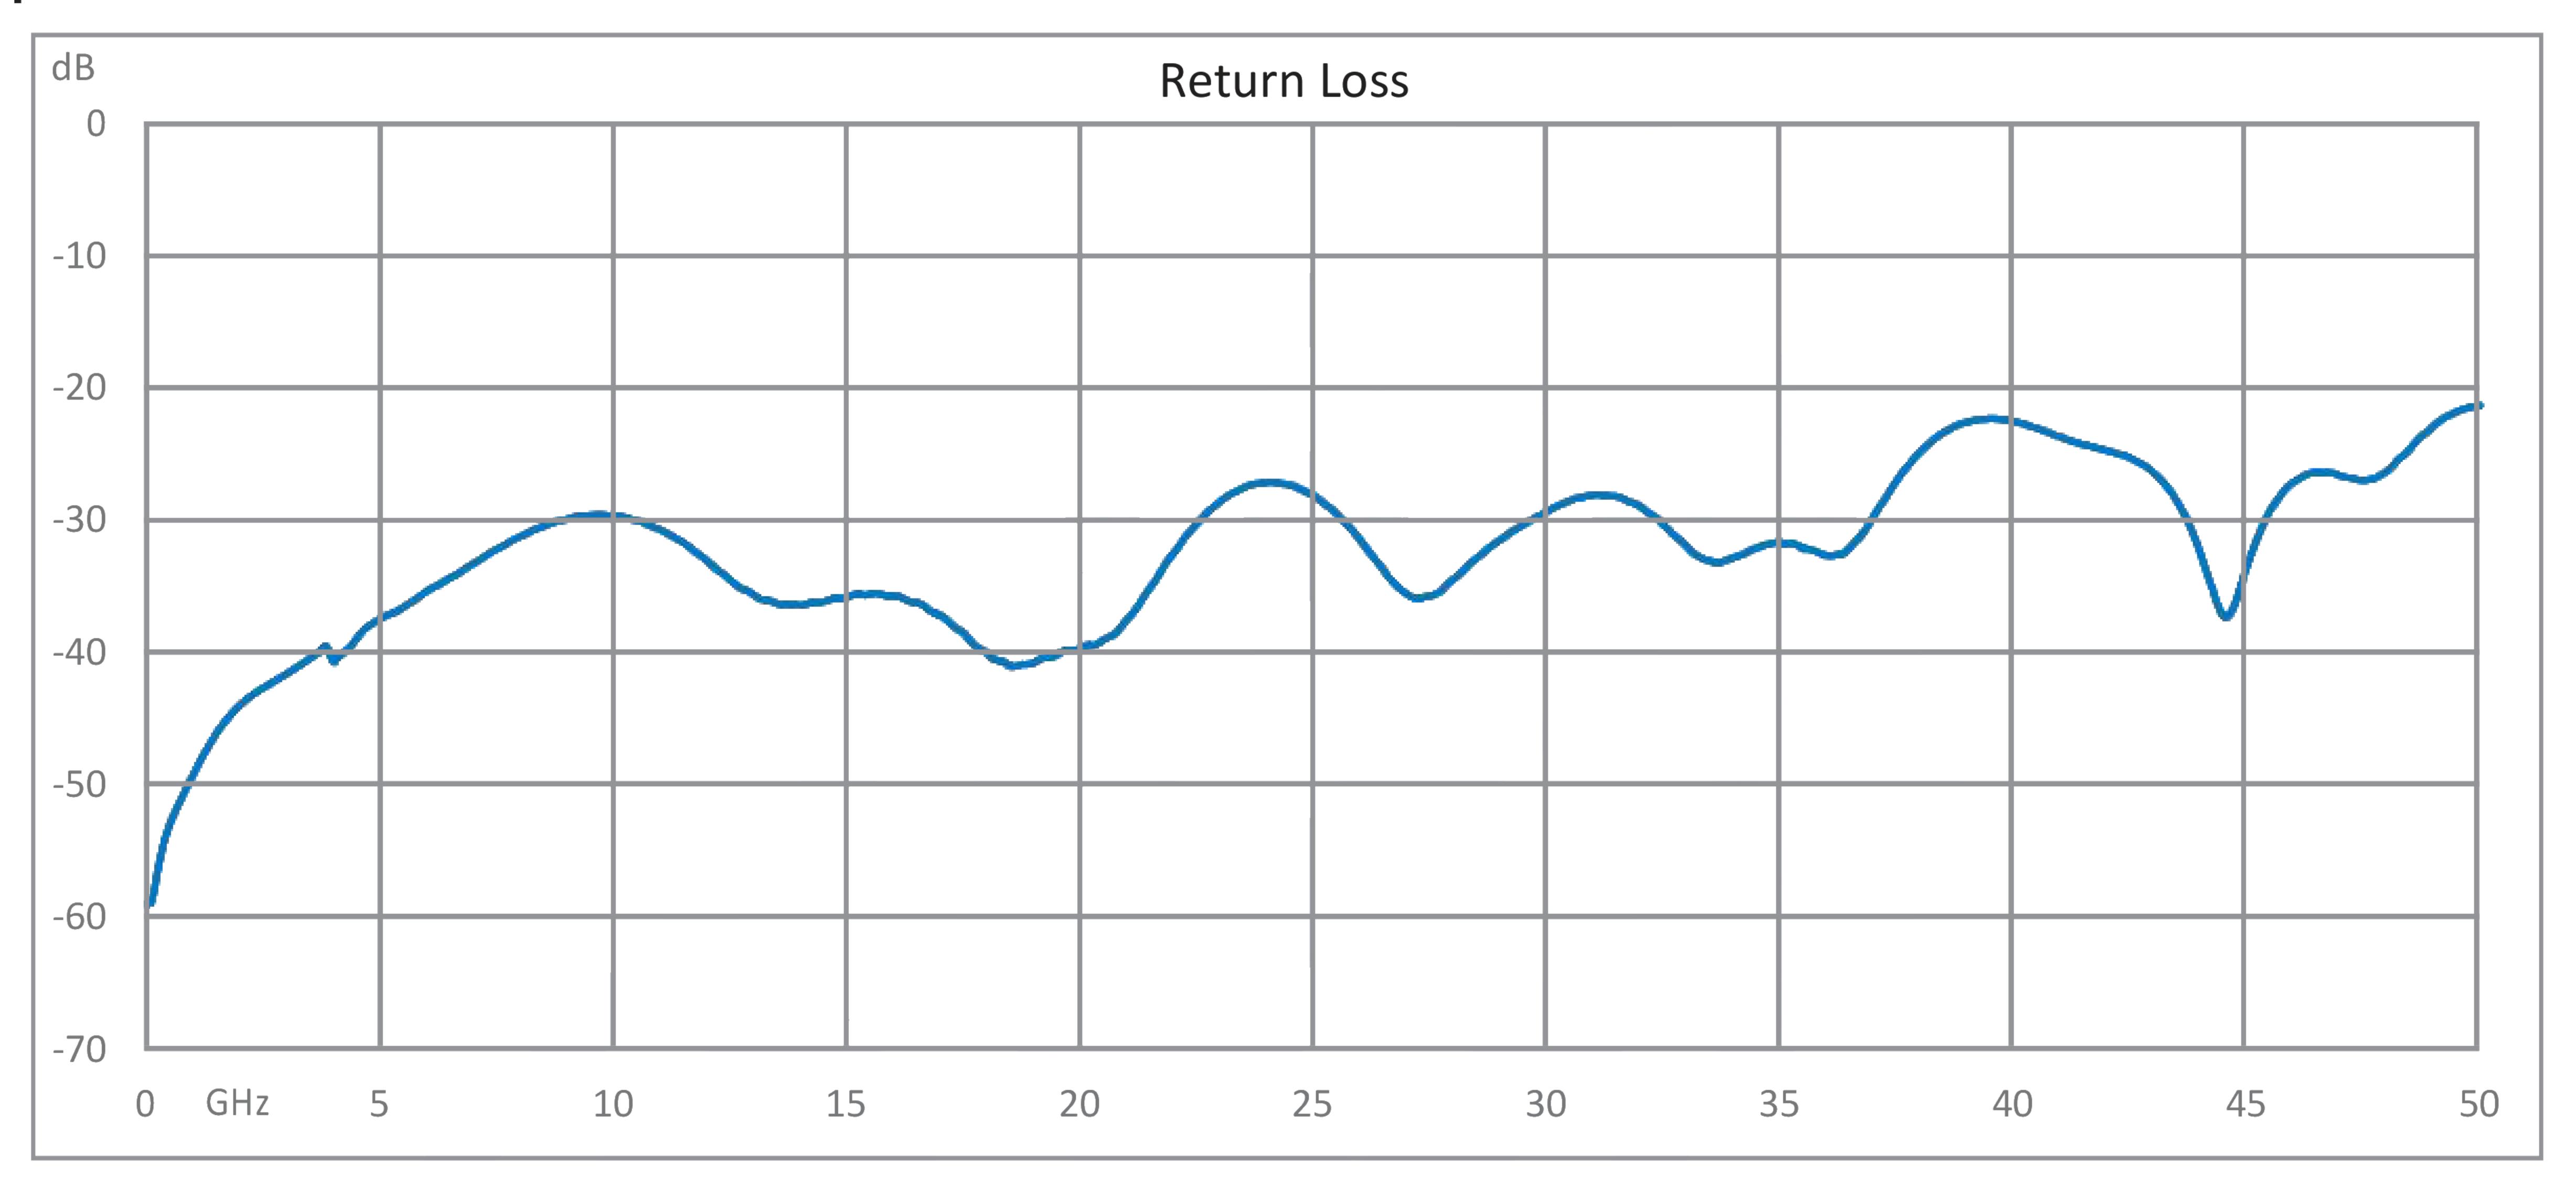

2.4mm Male to 2.4mm Male Adapter from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 2.4mm Male to 2.4mm Male Adapter ET11929

URL: https://www.ebeestock.com/2-4mm-male-to-2-4mm-male-adapter-0011929

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

www.ebeestock.com

ET11929 CAD Drawing 2.4mm Male to 2.4mm Male Adapter

