


Precision SMA Male to 2.92mm Male Adapter

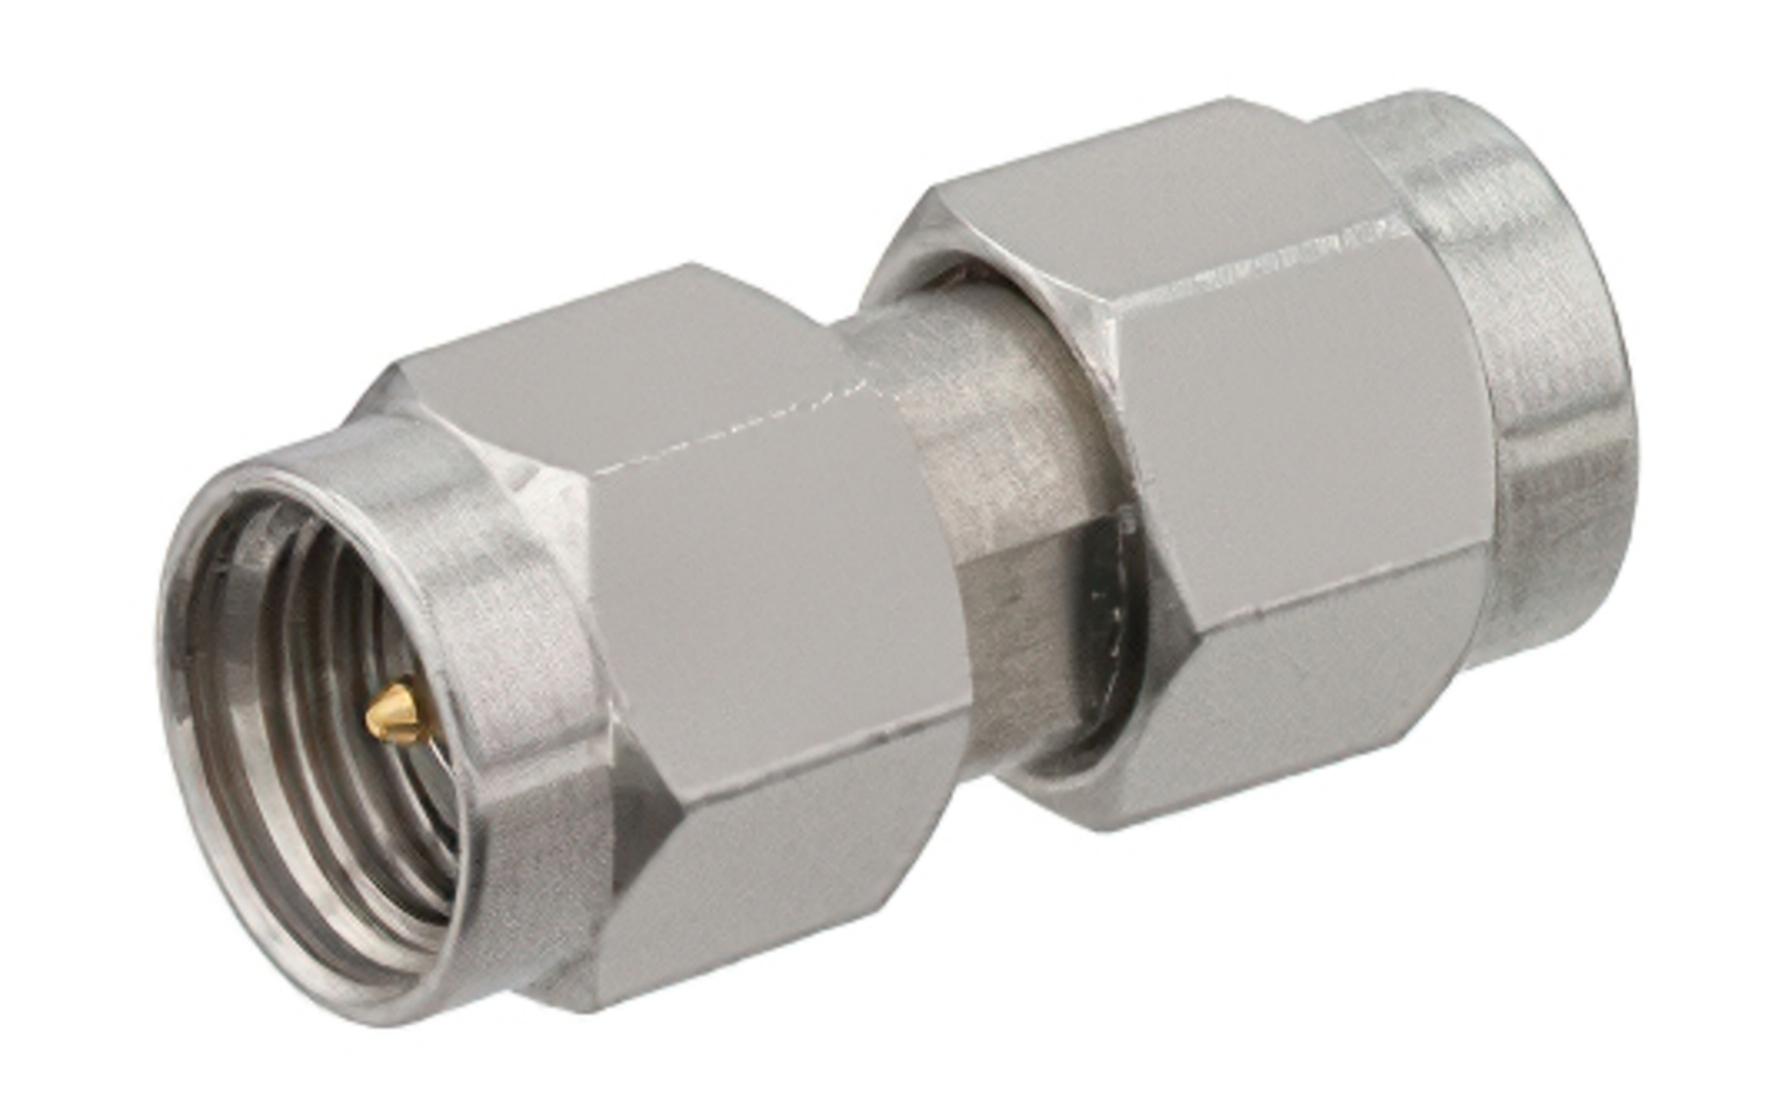

RF Adapters Technical Data Sheet

ET11987

Configuration

- SMA Male Connector 1
- 2.92mm Male Connector 2
- 50 Ohms

- Precision Design
- Straight Body Geometry

Features

- Max VSWR of 1.2:1 up to 26.5 GHz
- SMA Interface compliant with MIL-STD-348
- Gold over Nickel Plated Beryllium Copper Contact
- 50 µin min Gold over Nickel Contact Plating

Applications

- Allows Connection Between Series
- General Purpose Test
- Precision Test & Measurement

Description

Ebeestock's ET11987 precision SMA male to 2.92mm male adapter is part of our full line of RF components available for same-day shipping. The SMA connector mates mechanically with commercially available 3.5mm and 2.92mm (K) connectors. Our SMA to 2.92mm adapter has a male to male gender configuration built of durable stainless steel in a precision design. ET11987 SMA male to 2.92mm male adapter operates to 26.5 GHz. The Ebeestock RF adapter provides excellent VSWR of 1.2:1 maximum.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Ebeestock also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		26.5	GHz
VSWR			1.2:1	
Insertion Loss			0.25	dB
Dielectric Withstanding Voltage (AC)			750	Vrms

Electrical Specification Notes: Values at 25°C, sea level.

Mechanical Specifications

Size

 Length
 0.79 in [20.07 mm]

 Width
 0.312 in [7.92 mm]


 Weight
 0.013 lbs [5.9 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Precision SMA Male to 2.92mm Male Adapter ET11987

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



Precision SMA Male to 2.92mm Male Adapter

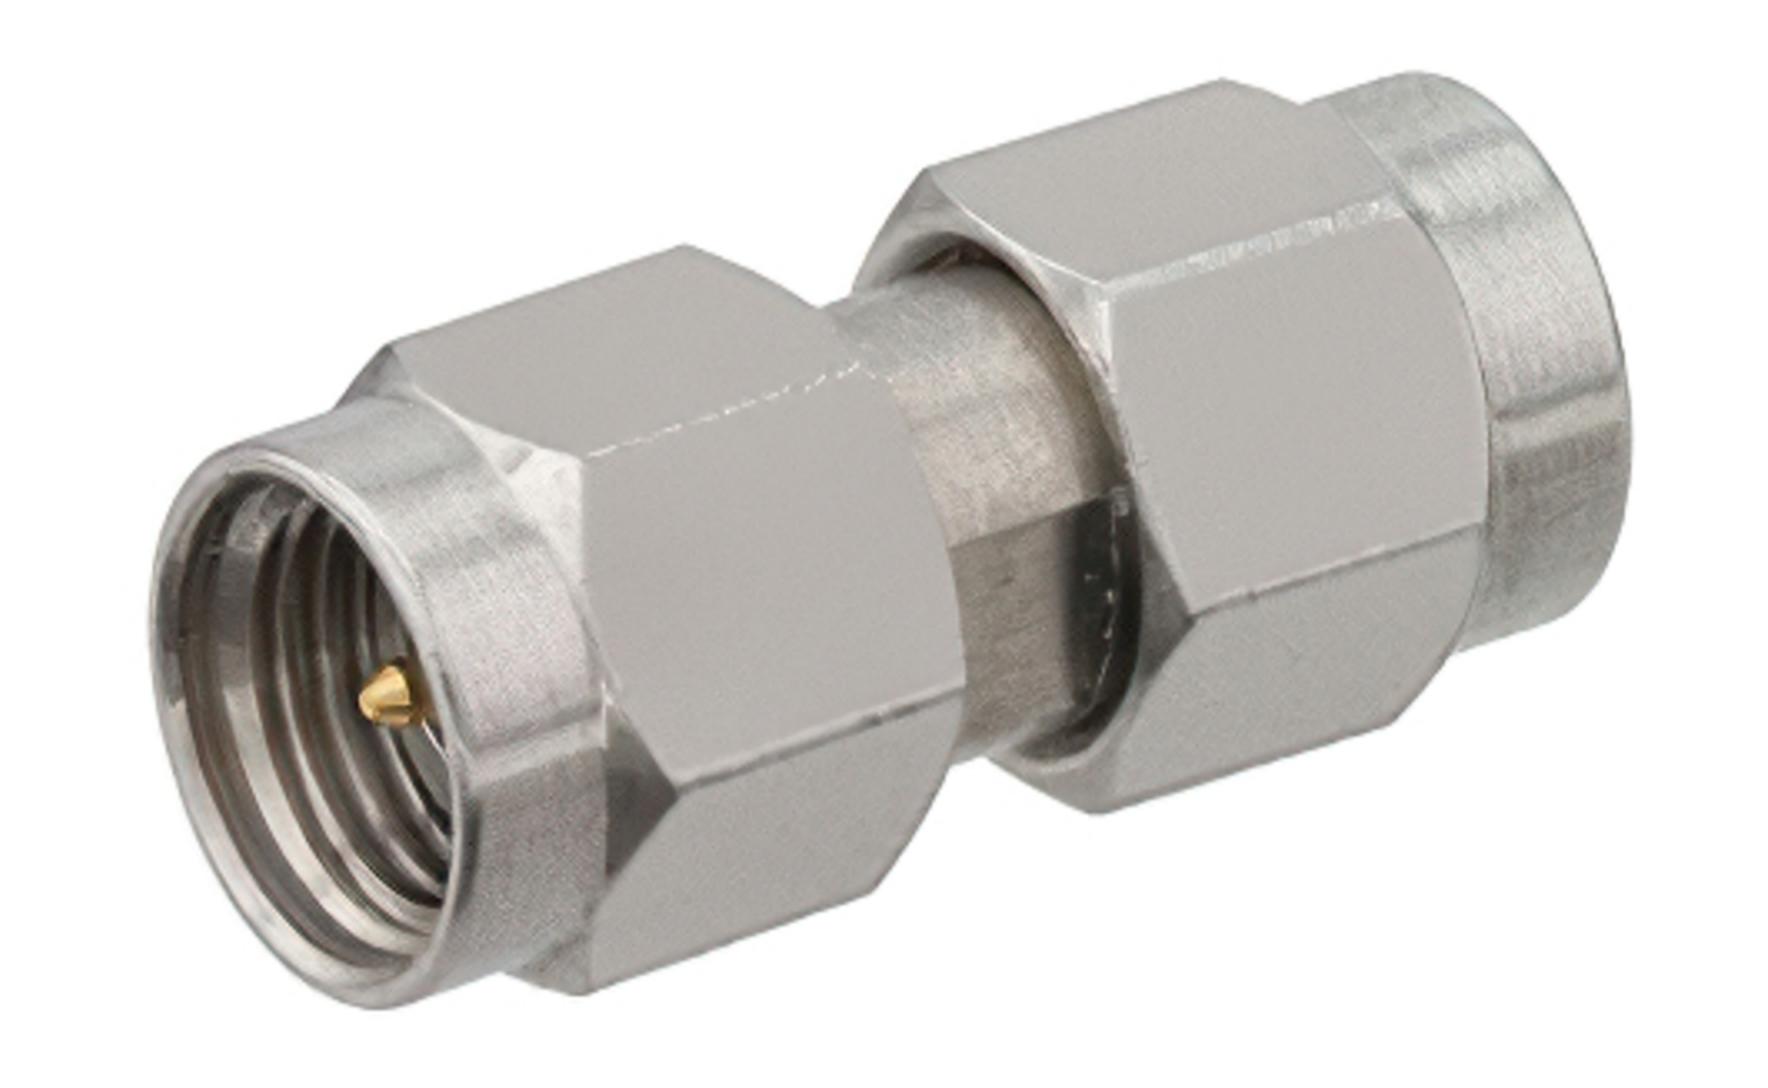

RF Adapters Technical Data Sheet

ET11987

Description	Connector 1	Connector 2	
Туре	SMA Male	2.92mm Male	
Polarity	Standard	Standard	
Interface Specification	MIL-STD-348		
Hex Size	5/16 in.	5/16 in.	
Mating Torque	8 to 10 in-lbs [0.90 to 1.13 Nm]	8 to 10 in-lbs [0.90 to 1.13 Nm]	

Material Specifications

	Connect	or 1	Connect	or 2
Descriptio	n Material	Plating	Material	Plating
Туре	SMA Male		2.92mm Male	
Contact	Beryllium Copper	Gold over Nickel	Beryllium Copper	Gold over Nickel
		50 µin minimum		50 μin minimum
Insulation	PTFE		PTFE	
Body	Passivated Stainless Steel		Passivated Stainless Steel	
		SAE-AMS-2700		SAE-AMS-2700
Coupling Nut	Passivated Stainless Steel		Passivated Stainless Steel	
		SAE-AMS-2700		SAE-AMS-2700

Environmental SpecificationsTemperature

Operating Range

-55 to +150 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data


Notes

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Precision SMA Male to 2.92mm Male Adapter ET11987

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



Precision SMA Male to 2.92mm Male Adapter

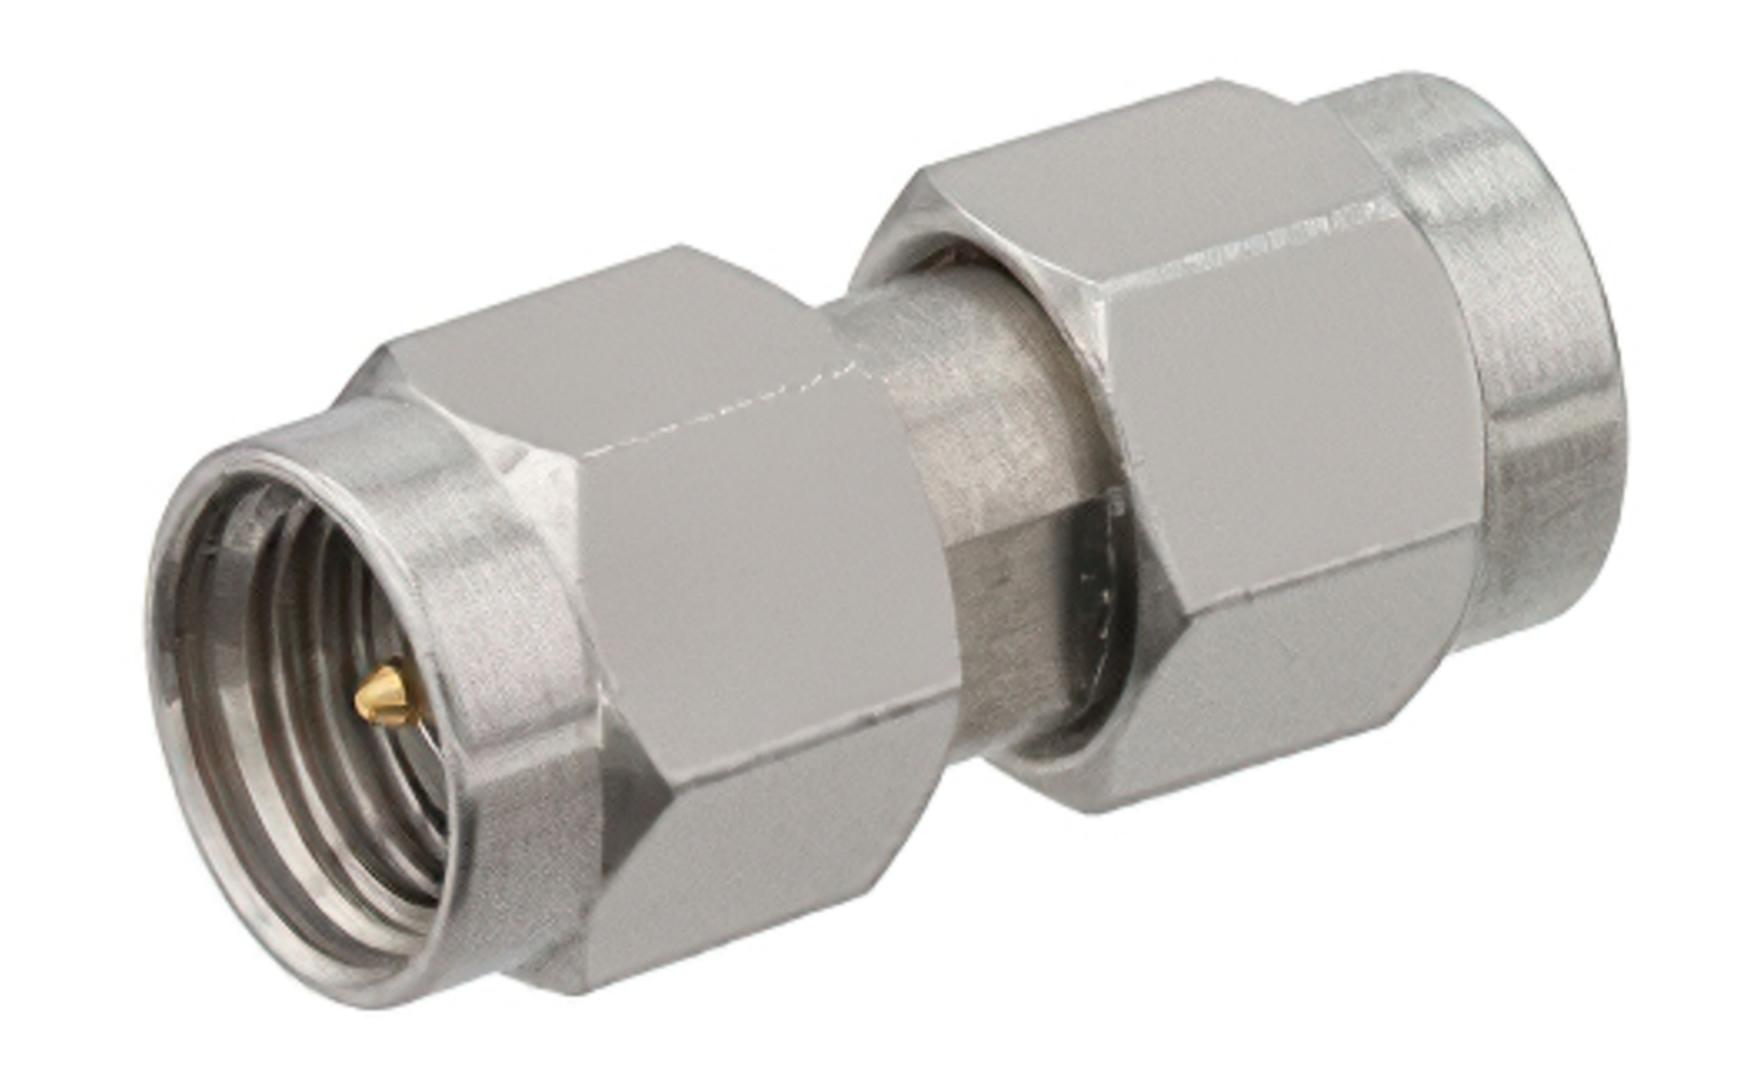

RF Adapters Technical Data Sheet

ET11987

Precision SMA Male to 2.92mm Male Adapter from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Precision SMA Male to 2.92mm Male Adapter ET11987

URL: https://www.ebeestock.com/precision-sma-male-to-2-92mm-male-adapter-0011987

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

ET11987 CAD Drawing
Precision SMA Male to 2.92mm Male Adapter

