



RF Adapters Technical Data Sheet

ET1199

1

Configuration

- 3.5mm Female Connector 1
- 2.92mm Male Connector 2

- 50 Ohms
- Straight Body Geometry

Features

- Max VSWR of 1.25:1 up to 34.5 GHz
- Gold over Nickel Plated Beryllium Copper Contact
- Contact Plating per MIL-G-45204

Applications

- Allows Connection Between Series
- General Purpose Test

Description

Ebeestock's ET11991 3.5mm female to 2.92mm male adapter is part of our full line of RF components available for sameday shipping. The 3.5mm connector mates mechanically with commercially available SMA and 2.92mm (K) connectors. Our 3.5mm to 2.92mm adapter has a female to male gender configuration. ET11991 3.5mm female to 2.92mm male adapter operates to 34.5 GHz. The Ebeestock RF adapter provides excellent VSWR of 1.25:1 maximum.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Ebeestock also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

lectrical Specifications			
Erequency Range	DC	34.5	GHz
VSWR		1.25:1	
Insertion Loss		0.3	dB

Electrical Specification Notes: Values at 25°C, sea level. Insertion Loss (dB) = 0.05*sqrt(fGHz).

Mechanical Specifications

Size

Length Width Weight

0.739 in [18.77 mm] 0.312 in [7.92 mm] 0.011 lbs [4.99 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 3.5mm Female to 2.92mm Male Adapter ET11991

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.





RF Adapters Technical Data Sheet ET11991

Description	Connector 1	Connector 2
Туре	3.5mm Female	2.92mm Male
Polarity	Standard	Standard
Mating Cycles	500	500
Hex Size		5/16 in.
Mating Torque		8 to 10 in-lbs [0.90 to 1.13 Nm]

Material Specifications

	Connector 1		Conne	ctor 2
Description	Material	Plating	Material	Plating
Туре	3.5mm Female		2.92mm Male	
Contact	Beryllium Copper	Gold over Nickel	Beryllium Copper	Gold over Nickel
		MIL-G-45204		MIL-G-45204
Insulation	Oxide-Noryl		Oxide-Noryl	
Outer Conductor Pa	assivated Stainless Steel			
		ASTM A380		
Body			Passivated Stainless Steel	
				ASTM A380
Coupling Nut			Passivated Stainless Steel	
				ASTM A380

Environmental Specifications

Temperature

Operating Range -55 to +100 deg C

Vibration Vibration MIL-STD-202, Method 204, Cond. D (20G's)

Salt Spray MIL-STD-202, Method 101, Cond. B, 5% salt solution

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 3.5mm Female to 2.92mm Male Adapter ET11991






RF Adapters Technical Data Sheet ET11991

Typical Performance Data

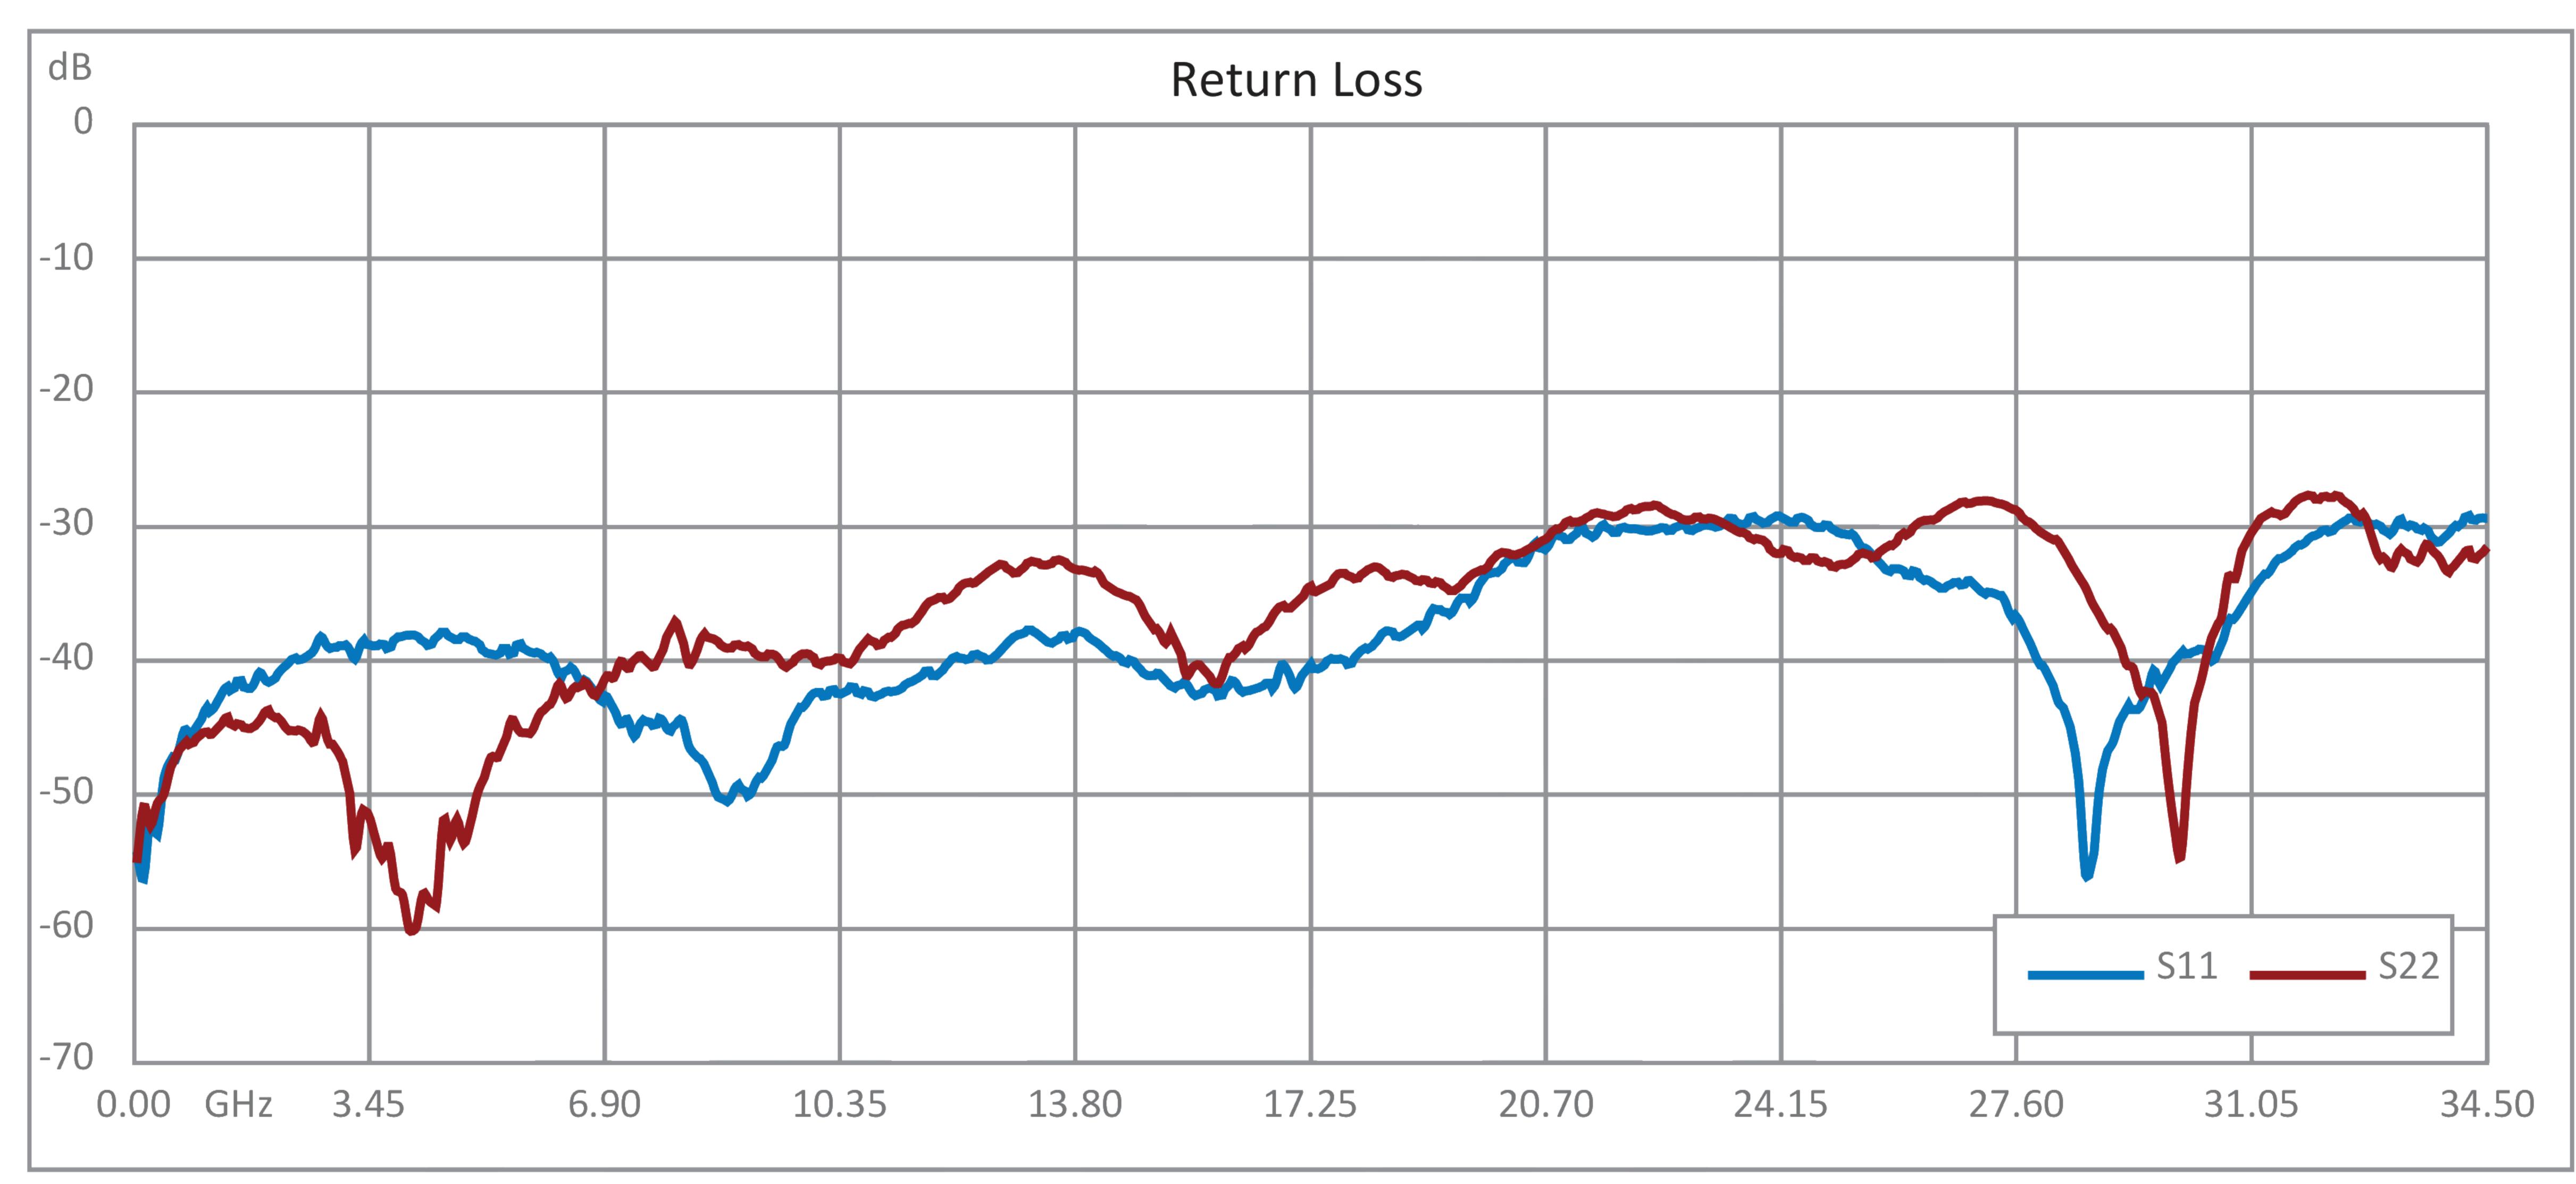

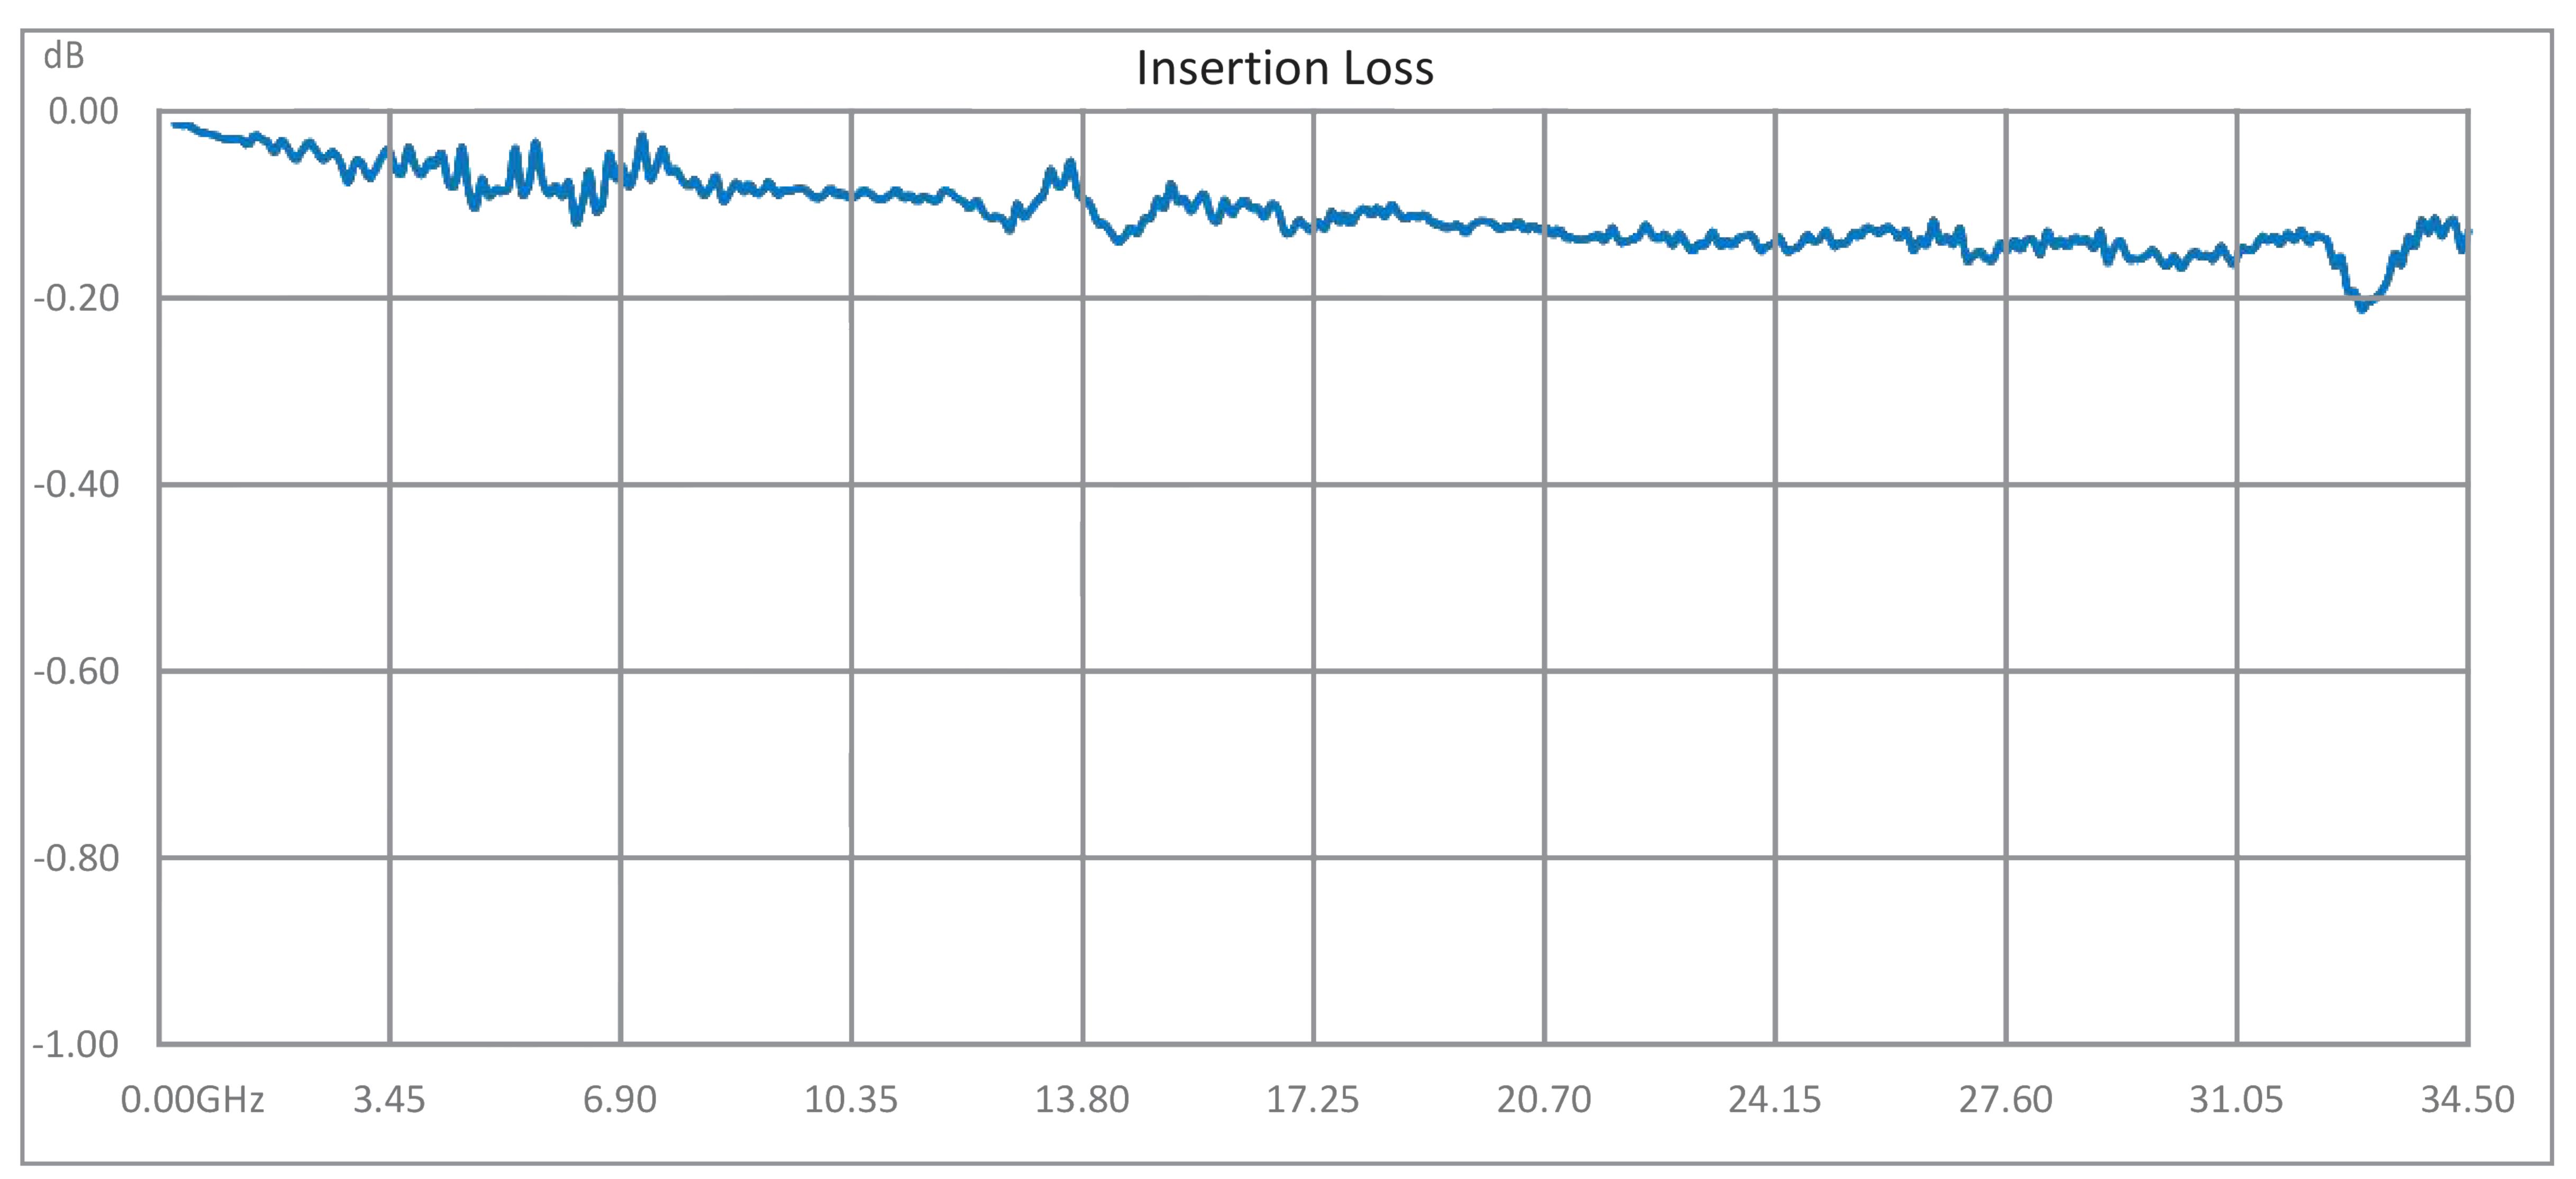

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 3.5mm Female to 2.92mm Male Adapter ET11991





RF Adapters Technical Data Sheet ET11991

3.5mm Female to 2.92mm Male Adapter from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 3.5mm Female to 2.92mm Male Adapter ET11991

URL: https://www.ebeestock.com/3-5mm-female-to-2-92mm-male-adapter-0011991

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

ET11991 CAD Drawing 3.5mm Female to 2.92mm Male Adapter

