

Low PIM 4.3-10 Male to N Female Right Angle Adapter



RF Adapters Technical Data Sheet

ET12047

Configuration

- 4.3-10 Male Connector 1
- N Female Connector 2
- 50 Ohm

- Low PIM Design
- Right Angle Body Geometry

Features

- Max VSWR of 1.25:1 up to 6 GHz
- PIM levels lower than -160 dBc

Silver Plated Beryllium Copper Contact

Feeder Cables

Applications

- Allows Connection Between Series
- General Purpose Test
- Low PIM Applications
- Mobile Communications Systems
- Base Stations
- Distributed Antenna Systems (DAS)
- Small Cells

na Systems

Description

Ebeestock's ET12047 4.3-10 male to type N female right angle adapter is part of our full line of RF components available for same-day shipping. Our 4.3-10 to type N adapter has a male to female gender configuration in a low PIM design. ET12047 4.3-10 male to type N female adapter operates to 6 GHz. The Ebeestock RF adapter provides excellent VSWR of 1.25:1 maximum and passive intermodulation of -160 dBc maximum. This right angle 4.3-10 to type N adapter allows for easier connections in tight spaces.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Ebeestock also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.25:1	
Passive Intermodulation			-160	dBc

Electrical Specification Notes: Values at 25° C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Low PIM 4.3-10 Male to N Female Right Angle Adapter ET12047



Low PIM 4.3-10 Male to N Female Right Angle Adapter



RF Adapters Technical Data Sheet

ET12047

Mechanical Specifications

Size

Connector 1	Connector 2
4.3-10 Male	N Female
Standard	Standard
500	500
	4.3-10 Male Standard

Material Specifications

Description	Connector 1		Connec	tor 2
	Material	Plating	Material	Plating
Туре	4.3-10 Male		N Female	
Contact	Beryllium Copper	Silver	Beryllium Copper	Silver
Insulation	PTFE		PTFE	
Outer Conductor			Brass	Tri-Metal
Body	Brass	Tri-Metal	Brass	Tri-Metal
Gasket	Silicone Rubber			
Coupling Nut	Brass	Tri-Metal		

Environmental Specifications

Temperature

Operating Range

-40 to +155 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data


Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Low PIM 4.3-10 Male to N Female Right Angle Adapter ET12047

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



Low PIM 4.3-10 Male to N Female Right Angle Adapter

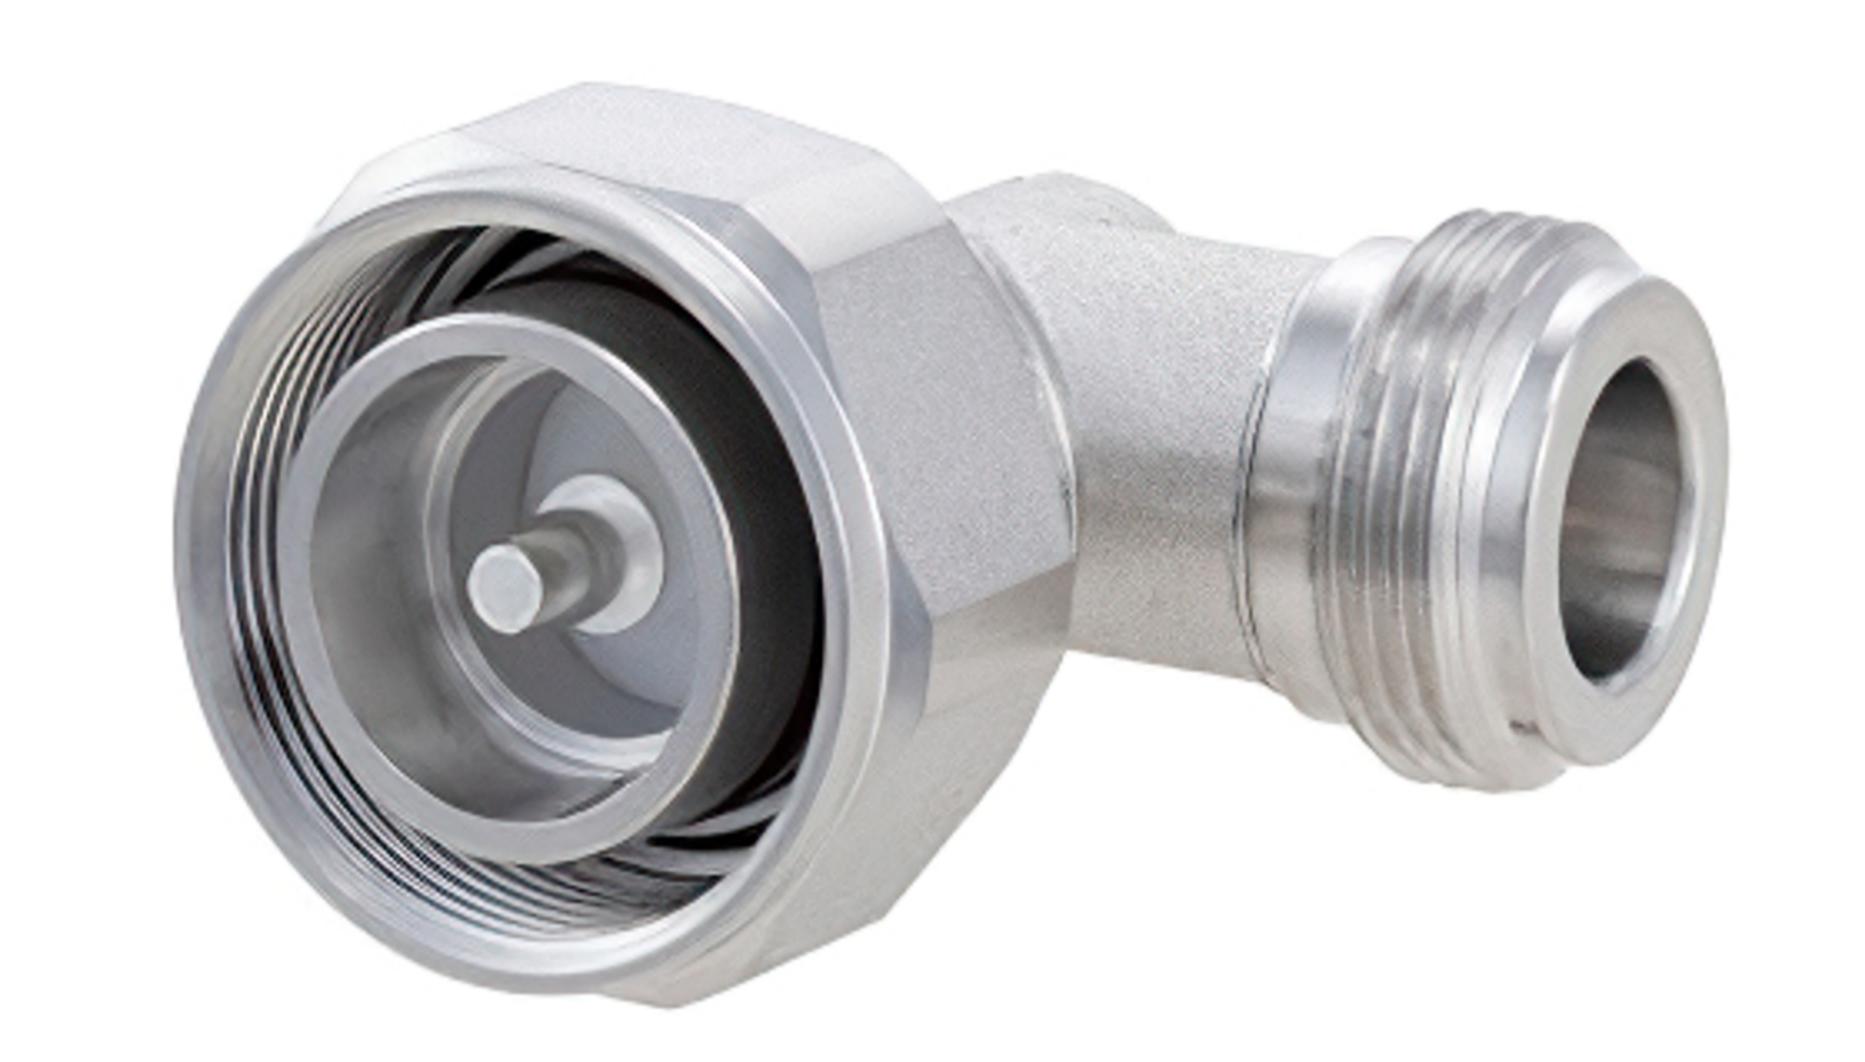

RF Adapters Technical Data Sheet

ET12047

Low PIM 4.3-10 Male to N Female Right Angle Adapter from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Low PIM 4.3-10 Male to N Female Right Angle Adapter ET12047

URL: https://www.ebeestock.com/low-pim-4-3-10-male-to-n-female-right-angle-adapter-0012047

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

