

10-32 Male to BNC Male Adapter



RF Adapters Technical Data Sheet

ET1211

9

Configuration

- 10-32 Male Connector 1
- BNC Male Connector 2

Features

- 10-32 Interface compliant with MIL-C-39012
- BNC Interface compliant with MIL-STD-348
- 50 Ohms
- Straight Body Geometry
- Gold Plated Contact
- Contact Plating per MIL-G-45204

Applications

• Allows Connection Between Series

General Purpose Test

Description

Ebeestock's ET12119 10-32 male to BNC male adapter is part of our full line of RF components available for same-day shipping. Our 10-32 to BNC adapter has a male to male gender configuration.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Ebeestock also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Mechanical Specifications

Size			
Length	1.1 in [27.94 mm]		
Width	0.57 in [14.		
Weight	0.041 lbs [18.6 g]	
Type	10-32 Male	BNC Male	
Polarity	Standard	Standard	
Interface Specification	MIL-C-39012	MIL-STD-348	

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 10-32 Male to BNC Male Adapter ET12119



10-32 Male to BNC Male Adapter



RF Adapters Technical Data Sheet ET12119

Material Specifications

	Conn	ector 1	Conn	ector 2
Description	Material	Plating	Material	Plating
Туре	10-32 Male		BNC Male	
Contact		Gold		Gold
		MIL-G-45204		MIL-G-45204
Insulation	PTFE		PTFE	
Body	Brass	Nickel	Brass	Nickel
		QQ-N-290		QQ-N-290
Coupling Nut	Brass	Nickel	Brass	Nickel
		QQ-N-290		QQ-N-290

Environmental Specifications

Temperature

Operating Range

-65 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:


10-32 Male to BNC Male Adapter from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 10-32 Male to BNC Male Adapter ET12119

URL: https://www.ebeestock.com/10-32-male-to-bnc-male-adapter-0012119

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

ET12119 CAD Drawing 10-32 Male to BNC Male Adapter

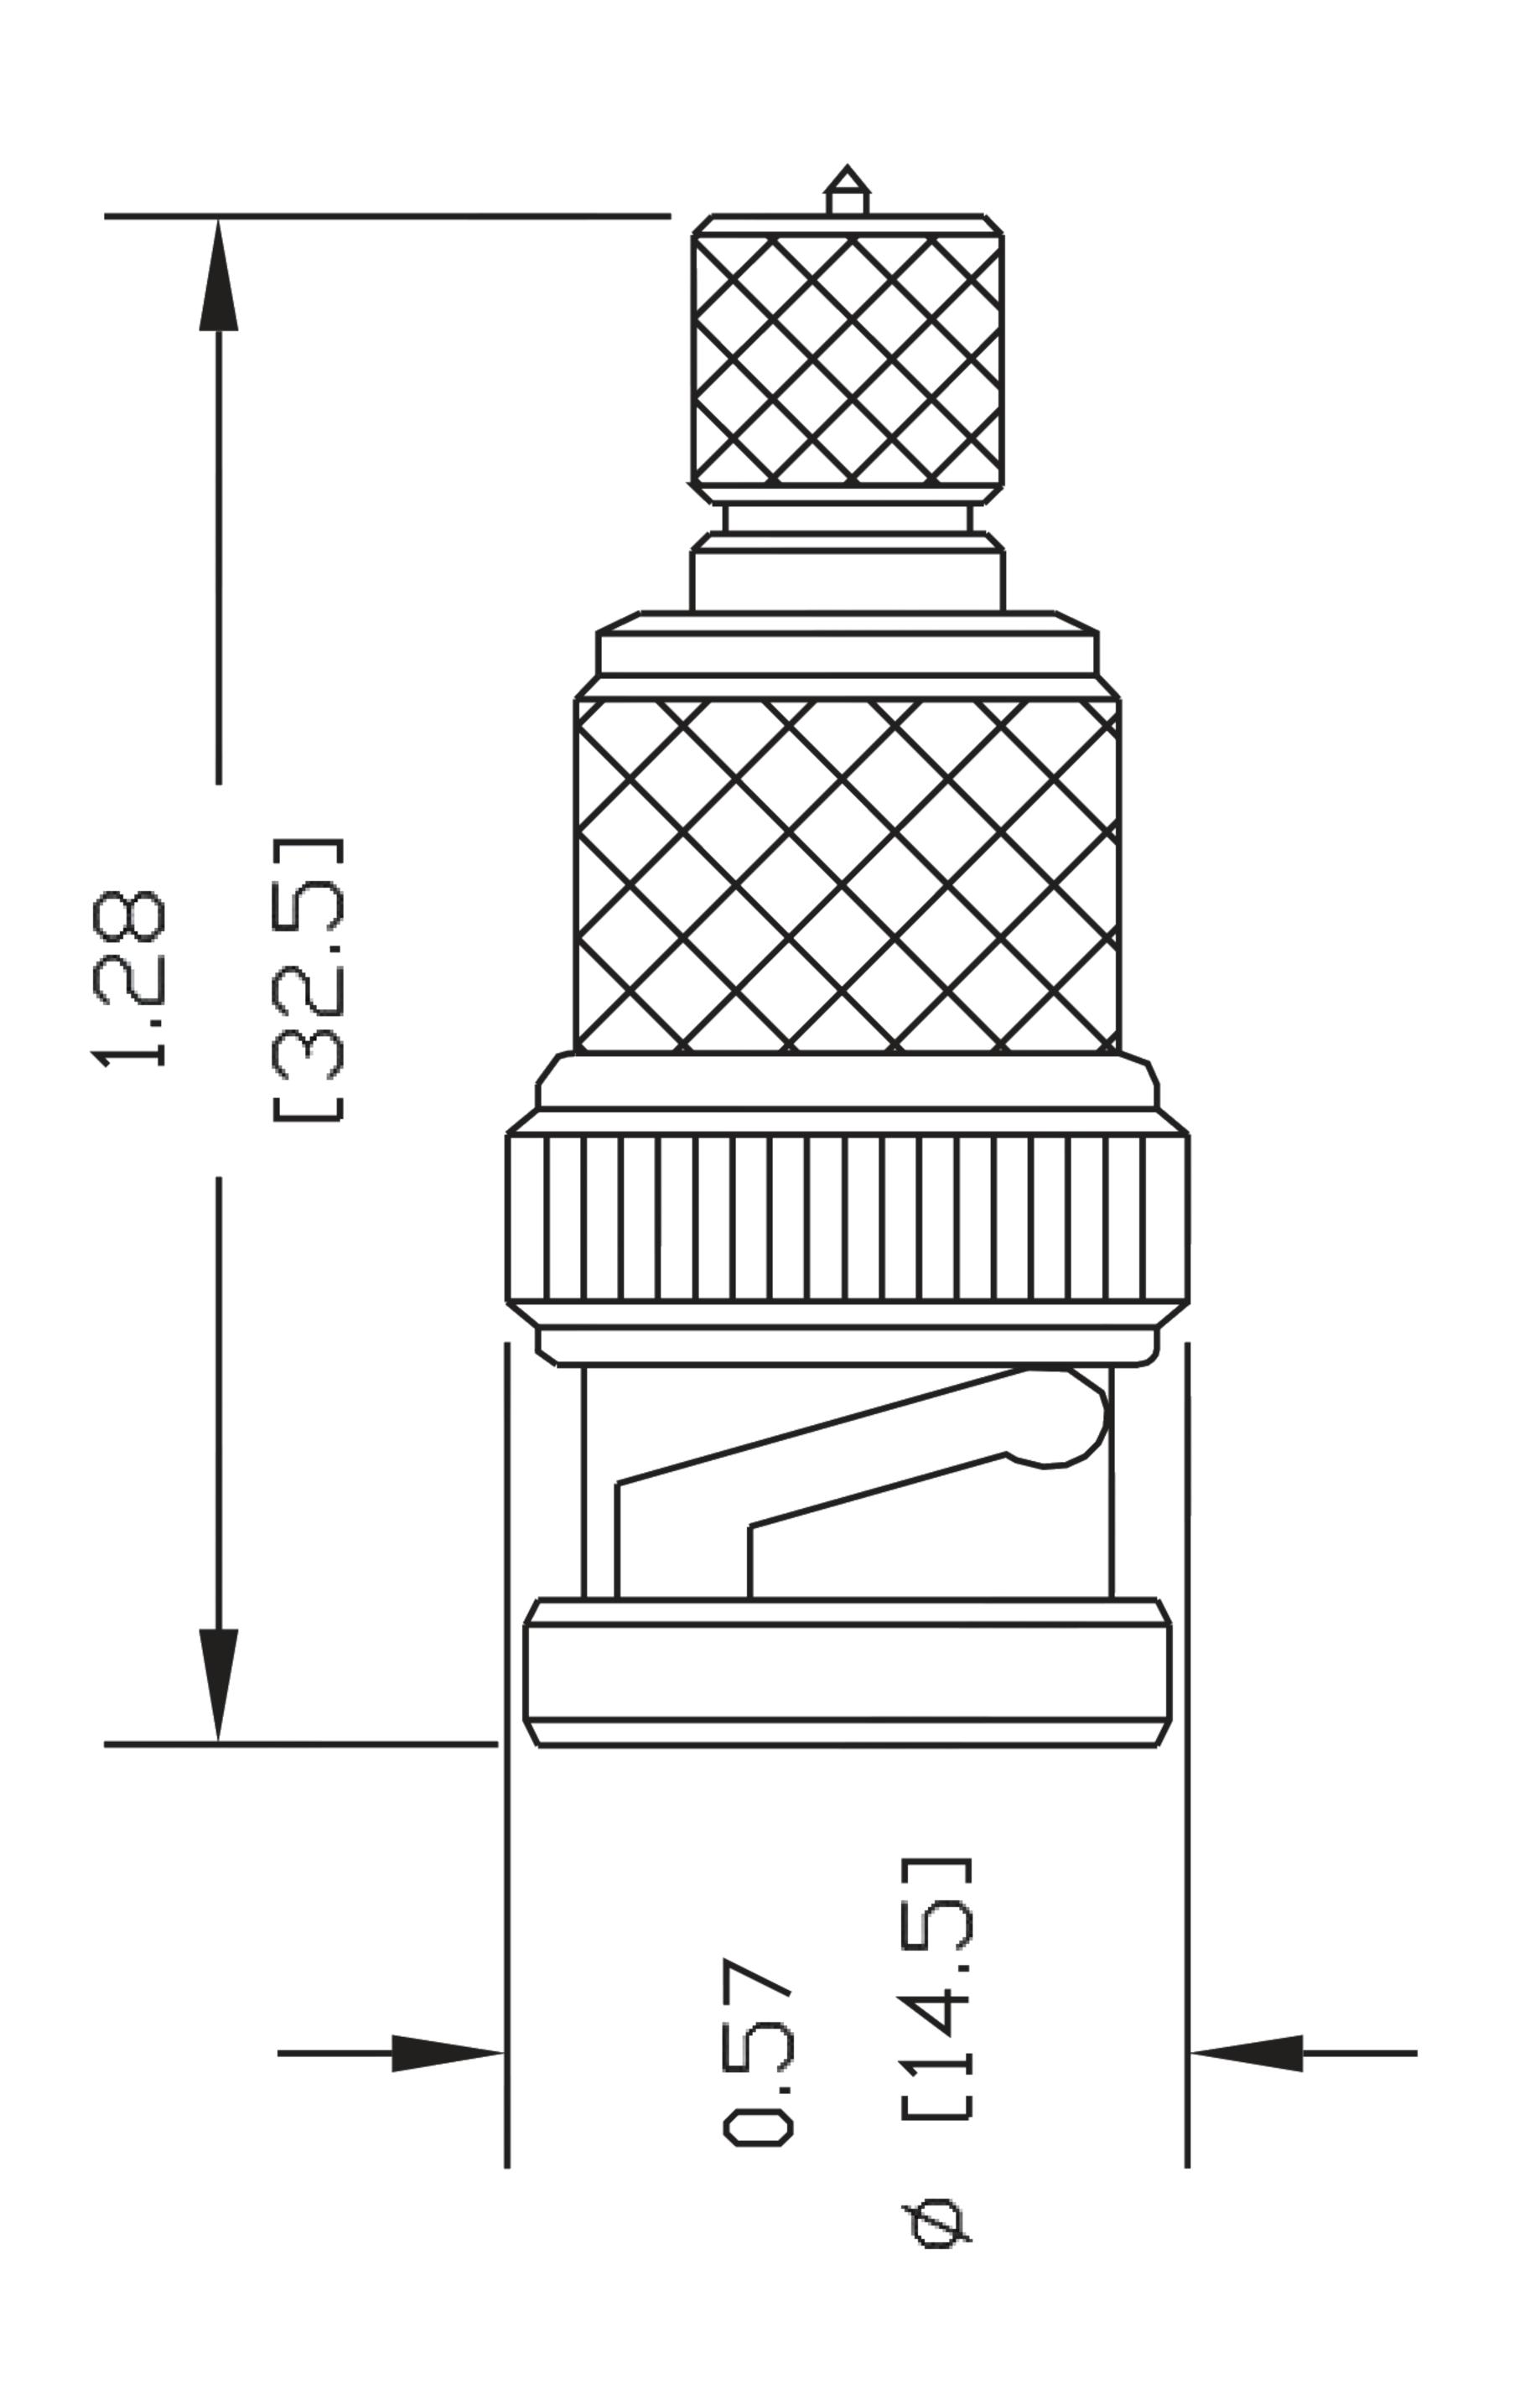

	DWG TITLE		NOTES:	THERWISE SE	ECIFIED AL	L DIMENSIONS ARE N	7	
	ET12119		3. DIMENSIO	NS ARE IN IN	HES [mm].	IMENSIONS ARE SUBJECT TO CHANGE WITHOUT NO	U NO ICE AL ANY	
ong, China.	REV	FSCM NO.	53919	CAD FILE	071703	SCALE N/A	SIZE A	127

Ebestock.com

8th Floor, Building 1, Yongfu Science
and Technology Center Industrial Park
strict 5, Humen,523900, Dongguan, Guan
:: www.ebeestock.com Email: sales@ebe