



RF Adapters Technical Data Sheet

ET1225

6

Configuration

- N Female Connector 1
- BNC Male Connector 2

Features

- Typical VSWR of 1.3:1 up to 4 GHz
- N Interface compliant with MIL-STD-348A
- BNC Interface compliant with MIL-STD-348A

- 50 Ohms
- Right Angle Body Geometry
- Gold Plated Brass Contact
- 30 µ-in min Gold Contact Plating

Applications

Allows Connection Between Series
 General Purpose Test

Description

Ebeestock's ET12256 type N female to BNC male right angle adapter is part of our full line of RF components available for same-day shipping. Our type N to BNC adapter has a female to male gender configuration. ET12256 type N female to BNC male adapter operates to 4 GHz. This low profile right angle type N to BNC adapter allows for easier connections in tight spaces.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Ebeestock also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications				
Frequency Range	DC		4	GHz
VSWR		1.3:1		

Electrical Specification Notes: Values at 25°C, sea level.

Mechanical Specifications

 Size

 Length
 1.264 in [32.11 mm]

 Width
 0.625 in [15.88 mm]

 Height
 1.22 in [30.99 mm]

 Weight
 0.105 lbs [47.63 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Female to BNC Male Right Angle Adapter ET12256





RF Adapters Technical Data Sheet ET12256

Description	Connector 1	Connector 2
Туре	N Female	BNC Male
Polarity	Standard	Standard
Interface Specification	MIL-STD-348A	MIL-STD-348A

Material Specifications

	Connector 1		Con	nector 2
Description	Material	Plating	Material	Plating
Туре	N Female		BNC Male	
Contact	Brass	Gold	Brass	Gold
		30 µ-in minimum		30 µ-in minimum
Insulation	PTFE		PTFE	
Outer Conductor	Brass	Nickel		
		100 μ-in minimum		
Body			Brass	Nickel
				100 μ-in minimum
Gasket			Silicone	
Coupling Nut			Brass	Nickel
				100 μ-in minimum

Environmental SpecificationsTemperature

Operating Range

-65 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Female to BNC Male Right Angle Adapter ET12256


8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.






RF Adapters Technical Data Sheet ET12256

Typical Performance Data

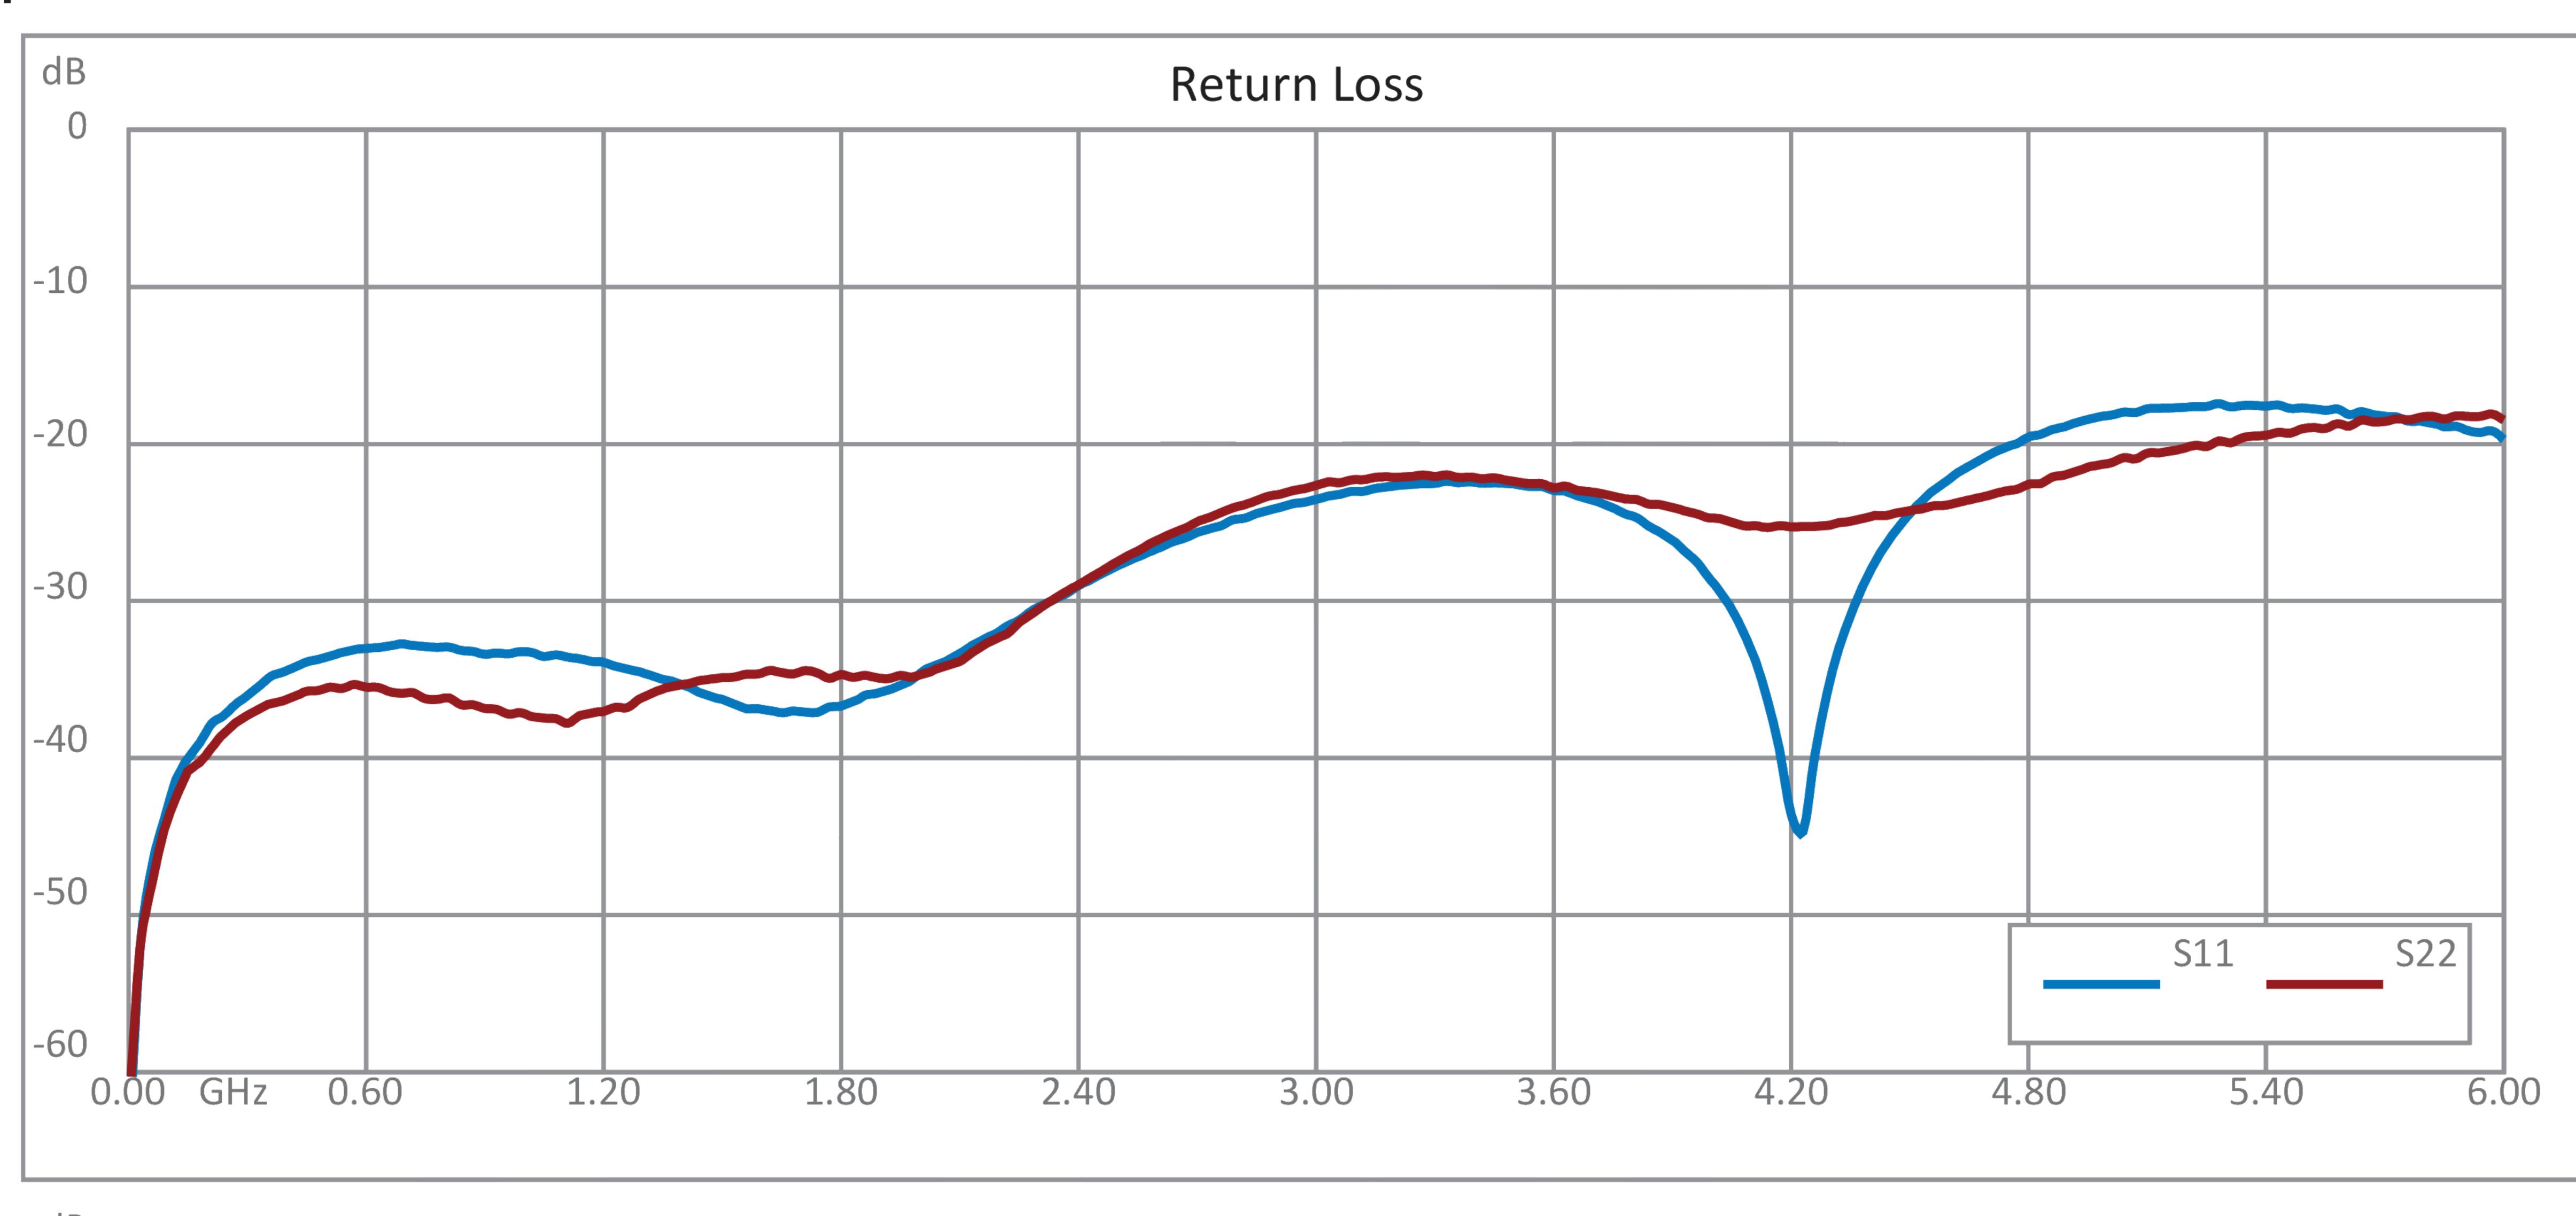

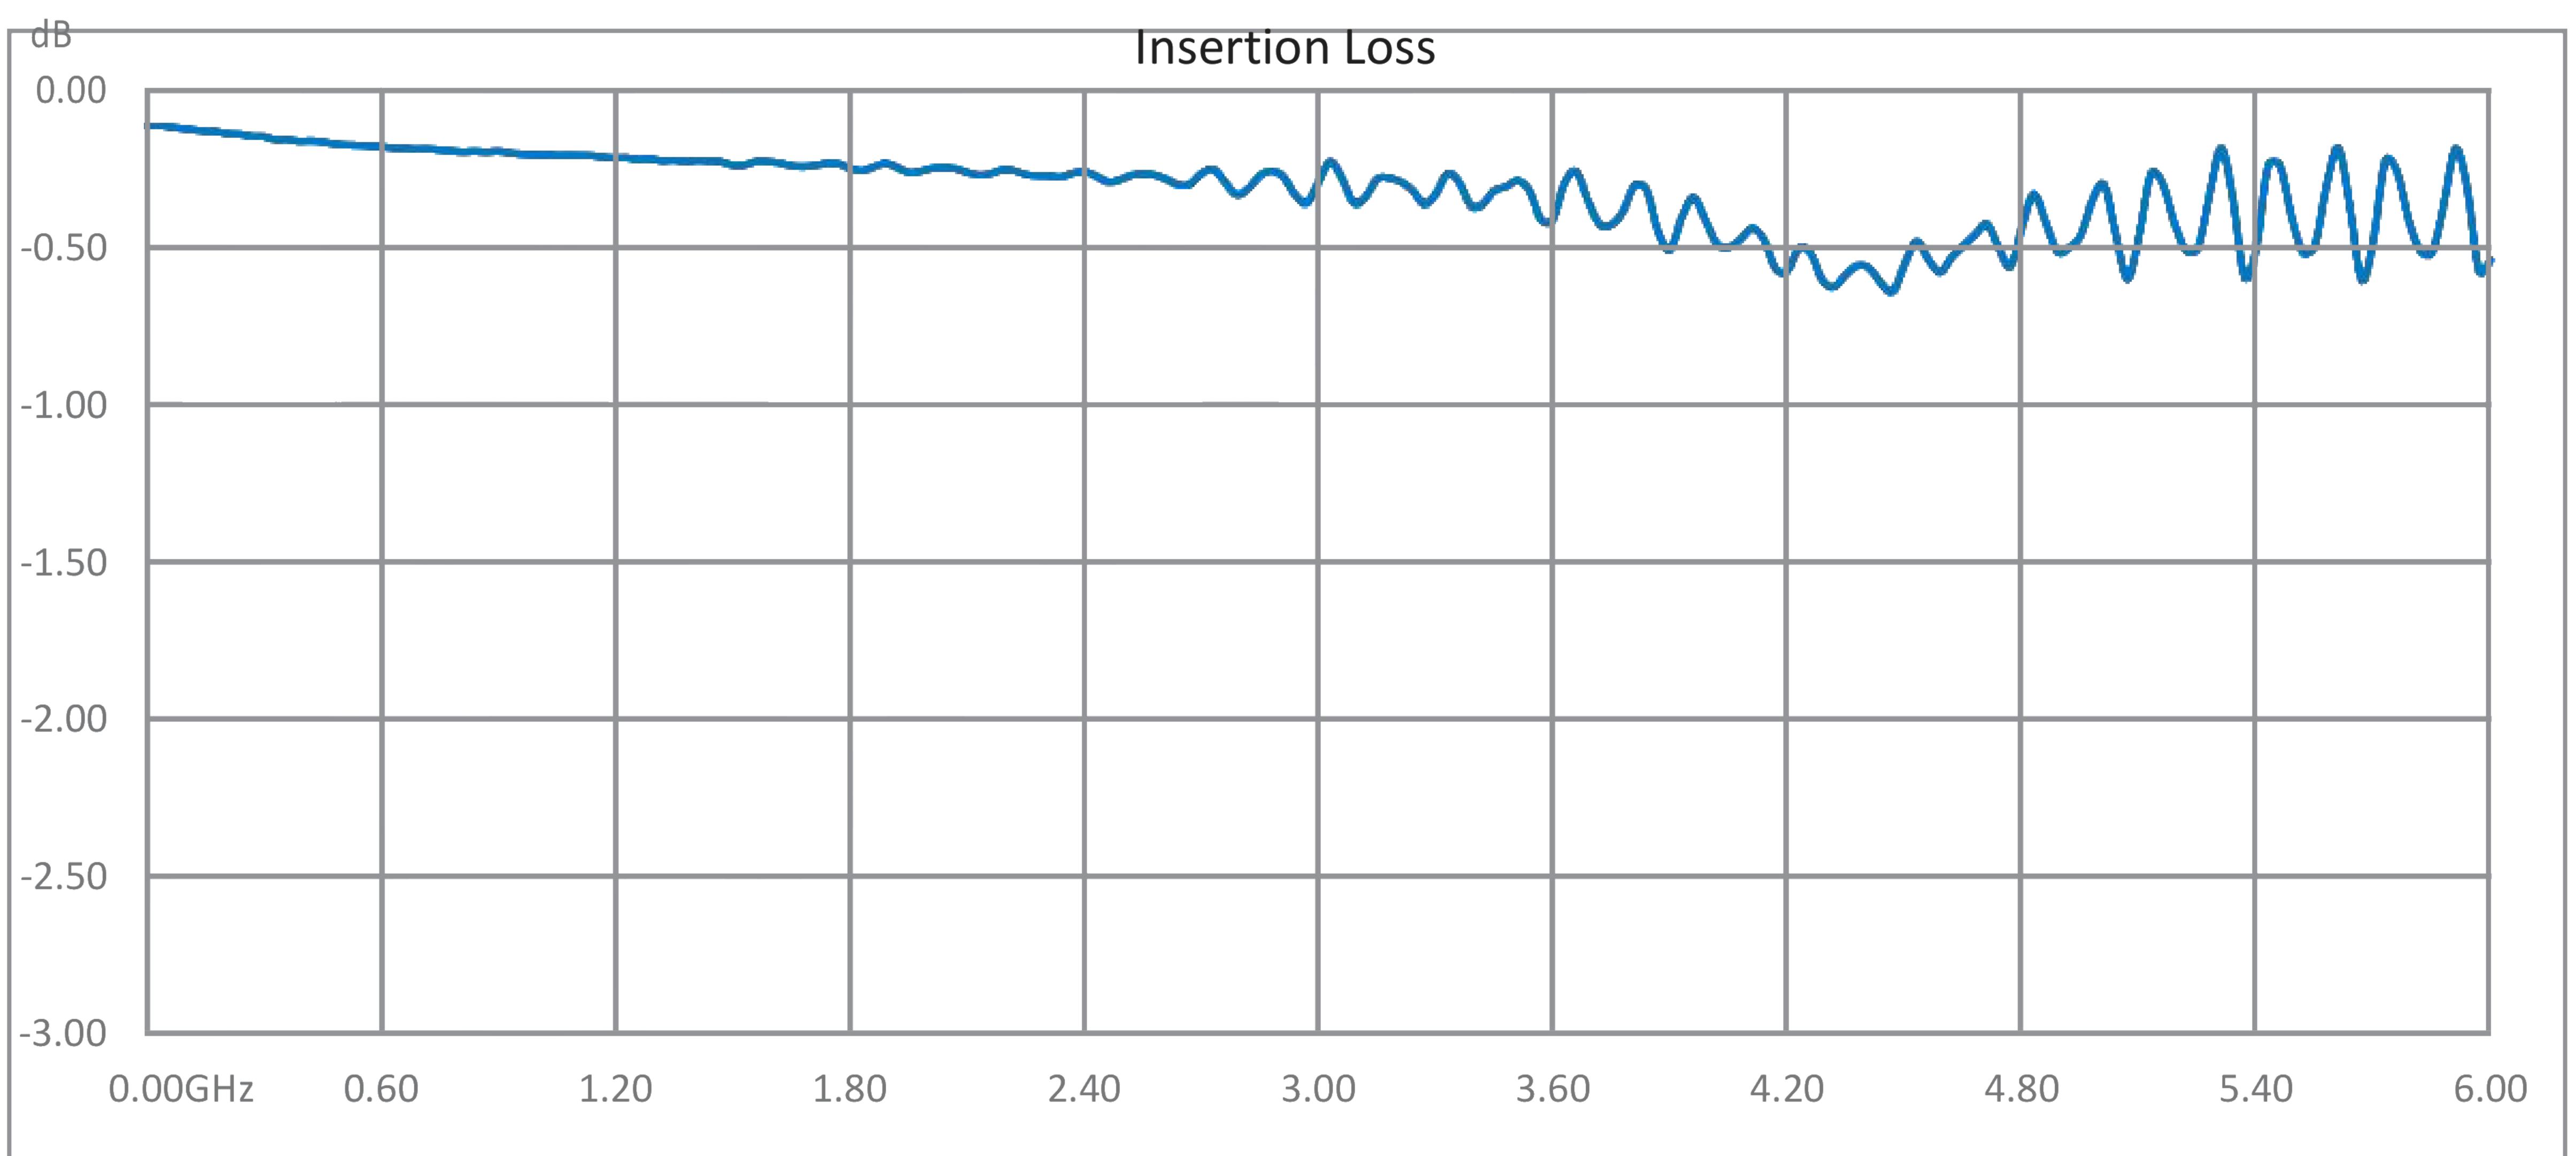

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Female to BNC Male Right Angle Adapter ET12256





RF Adapters Technical Data Sheet ET12256

N Female to BNC Male Right Angle Adapter from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Female to BNC Male Right Angle Adapter ET12256

URL: https://www.ebeestock.com/n-female-to-bnc-male-right-angle-adapter-0012256

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

ET12256 CAD Drawing
N Female to BNC Male Right Angle Adapter

