

N Female to MCX Jack Adapter



# RF Adapters Technical Data Sheet

ET1238

4

# Configuration

- N Female Connector 1
- MCX Jack Connector 2

# Features

- N Interface compliant with MIL-STD-348
- MCX Interface compliant with MIL-C-39012

- 50 Ohms
- Straight Body Geometry
- Gold Plated Contact
- Contact Plating per MIL-G-45204

# Applications

• Allows Connection Between Series

General Purpose Test

## Description

Ebeestock's ET12384 type N female to MCX jack adapter is part of our full line of RF components available for same-day shipping. Our type N to MCX adapter has a female to jack gender configuration.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Ebeestock also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

## Mechanical Specifications

Size			
Length	1.352 in [34	.34 mm]	
Width	0.625 in [15	.88 mm]	
Weight	0.065 lbs [29.48 g]		
Type	N Female	MCX Jack	
Polarity	Standard	Standard	
Interface Specification	MIL-STD-348	MIL-C-39012	

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Female to MCX Jack Adapter ET12384



N Female to MCX Jack Adapter



# RF Adapters Technical Data Sheet ET12384

### Material Specifications

Con		ector 1	Connector 2	
Description	Material	Plating	Material	Plating
Туре	N Female		MCX Jack	
Contact		Gold		Gold
		MIL-G-45204		MIL-G-45204
Insulation	PTFE		PTFE	
Outer Conductor	Brass	Nickel	Brass	Nickel
		QQ-N-290		QQ-N-290

# **Environmental Specifications**

Temperature

Operating Range

-65 to +165 deg C

Compliance Certifications (see product page for current document)

#### Plotted and Other Data


Notes:

N Female to MCX Jack Adapter from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Female to MCX Jack Adapter ET12384

URL: https://www.ebeestock.com/n-female-to-mcx-jack-adapter-0012384

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

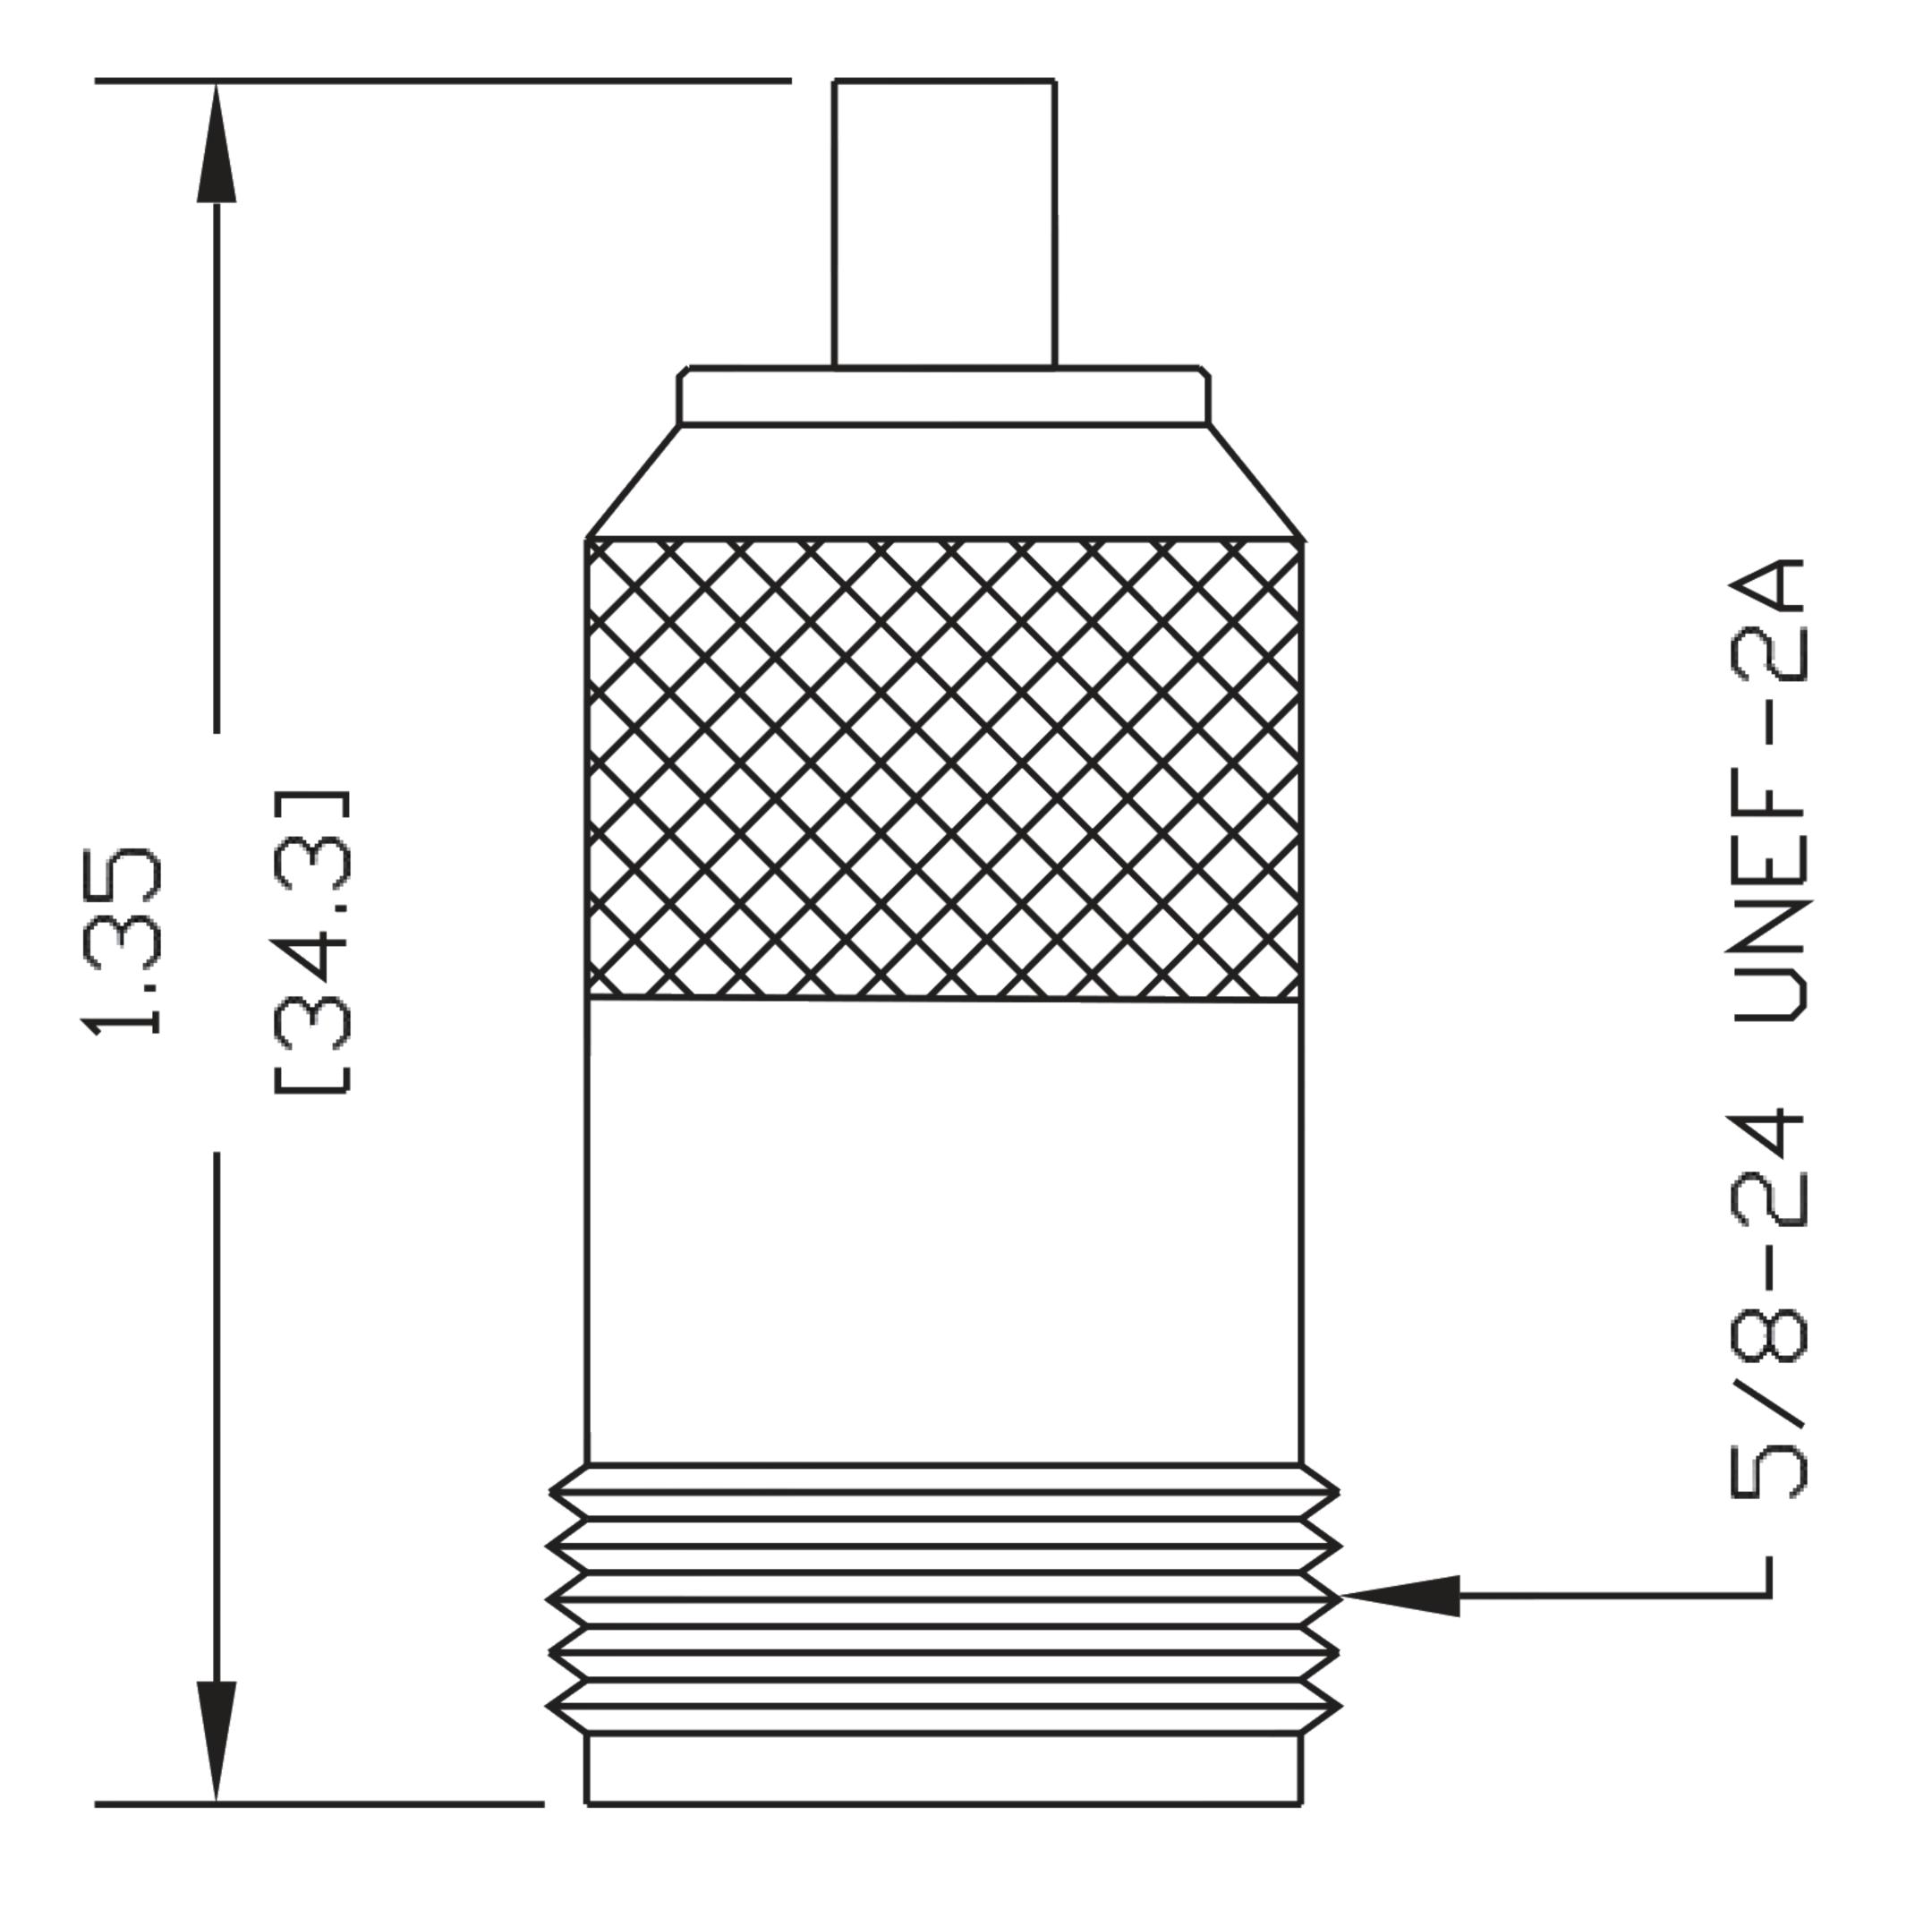

E AT ANY TIME.	127
٠ (ر)	SIZE A
OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL CIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTI ONS ARE IN INCHES [mm].	SCALE N/A
SE SPECIFIED A NS ARE SUBJE N INCHES [mm]	<b>-E</b> 092302
S OTHERWIS ECIFICATION SIONS ARE II	CAD FILE
NOTES: 1. UNLESS ( 2. ALL SPEC 3. DIMENSIC	53919
	S
	FSCE
DWG TITLE ET12384	REV