

SMA Male to SMC Jack Adapter



RF Adapters Technical Data Sheet

ET1268

8

Configuration

- SMA Male Connector 1
- SMC Jack Connector 2

Features

- Max VSWR of 1.2:1 up to 10 GHz
- SMA Interface compliant with MIL-STD-348
- SMC Interface compliant with MIL-STD-348

- 50 Ohms
- Straight Body Geometry
- Gold Plated Contact
- Contact Plating per MIL-G-45204

Applications

Allows Connection Between Series
 General Purpose Test

Description

Ebeestock's ET12688 SMA male to SMC jack adapter is part of our full line of RF components available for same-day shipping. The SMA connector mates mechanically with commercially available 3.5mm and 2.92mm (K) connectors. Our SMA to SMC adapter has a male to jack gender configuration. ET12688 SMA male to SMC jack adapter operates to 10 GHz. The Ebeestock RF adapter provides excellent VSWR of 1.2:1 maximum.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Ebeestock also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications			
Erequency Range	DC	10	GHz
VSWR		1.2:1	

Electrical Specification Notes: Values at 25°C, sea level.

Mechanical Specifications

Size

Length
Width
0.814 in [20.68 mm]
0.312 in [7.92 mm]
0.006 lbs [2.72 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Male to SMC Jack Adapter ET12688

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



SMA Male to SMC Jack Adapter



RF Adapters Technical Data Sheet ET12688

Description	Connector 1	Connector 2
Туре	SMA Male	SMC Jack
Polarity	Standard	Standard
Interface Specification	MIL-STD-348	MIL-STD-348
Hex Size	5/16 in.	
Mating Torque	3 to 5 in-lbs [0.34 to 0.57 Nm]	

Material Specifications

	Conn	ector 1	Conn	ector 2
Description	Material	Plating	Material	Plating
Туре	SMA Male		SMC Jack	
Contact		Gold		Gold
		MIL-G-45204		MIL-G-45204
Insulation	PTFE		PTFE	
Outer Conductor			Brass	Nickel
				QQ-N-290
Body	Brass	Nickel		
		QQ-N-290		
Coupling Nut	Brass	Nickel		
		QQ-N-290		

Environmental Specifications

Temperature

Operating Range

-65 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Male to SMC Jack Adapter ET12688



SMA Male to SMC Jack Adapter




RF Adapters Technical Data Sheet ET12688

SMA Male to SMC Jack Adapter from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Male to SMC Jack Adapter ET12688

URL: https://www.ebeestock.com/sma-male-to-smc-jack-adapter-0012688

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

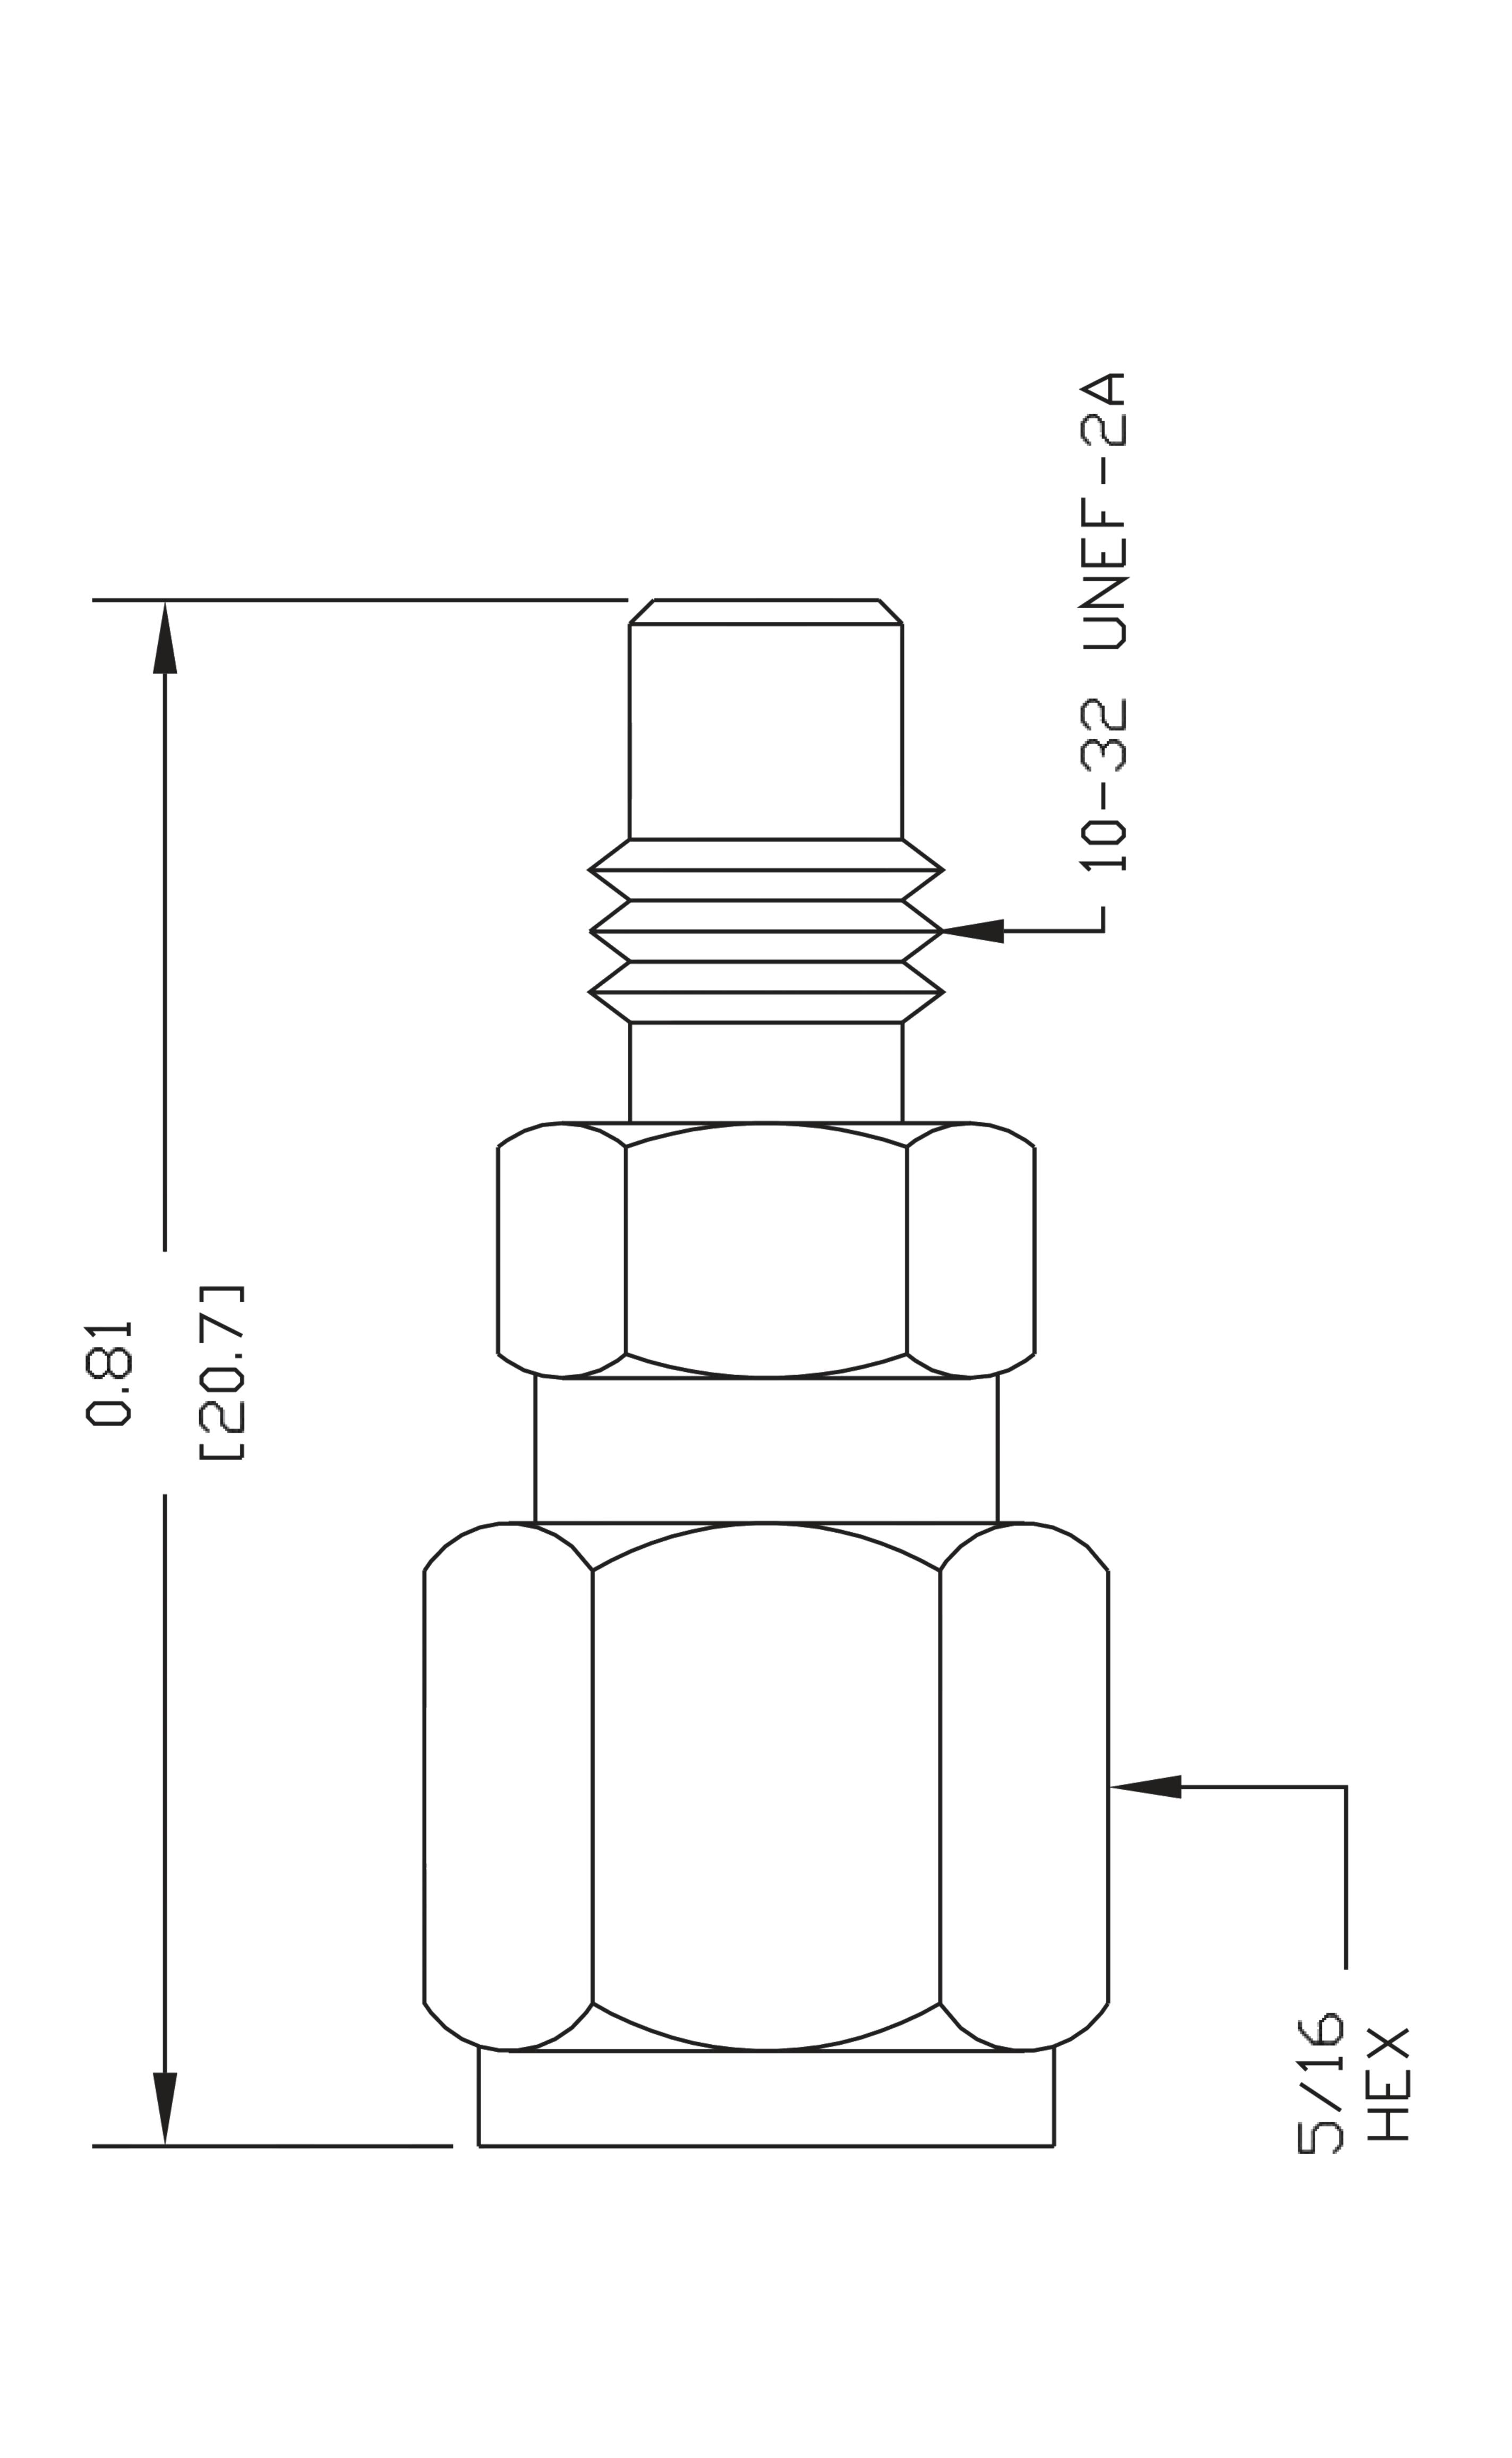

e beestock	DWG TITLE		NOTES:	RWISE SPECIFIED	ALL DIMENSIONS ARE P	г	
Ebeesto Sor, Building 1	ET12688		3. DIMENSIC	RE IN INCHES (mn	J. CHANGE WILL	₹	ANY ME
-	REV	FSCM NO. 5	3919	CAD FILE 082802	SCALE N/A	SIZE A	127