

SMA Male to SMA Female 4 Hole Flange Mount Adapter



RF Adapters Technical Data Sheet

ET1275

5

Configuration

- SMA Male Connector 1
- SMA Female Connector 2
- 50 Ohm

- Straight Body Geometry
- 4 Hole Flange Mount Method

Features

- Max VSWR of 1.25:1 up to 18 GHz
- SMA interface compliant with MIL-STD-348
- Gold Plated Beryllium Copper Contact

- Max VSWR of 1.25:1 up to 18 GHz
- SMA Interface compliant with MIL-STD-348
- Gold Plated Beryllium Copper Contact

Applications

- General Purpose Test
- Rack Mounted Equipment
- General Purpose Test
- Rack Mounted Equipment

Description

Ebeestock's ET12755 SMA male to SMA female 4 hole flange adapter is part of our full line of RF components available for same-day shipping. The SMA connector mates mechanically with commercially available 3.5mm and 2.92mm (K) connectors. Our SMA to SMA adapter has a male to female gender configuration. ET12755 SMA male to SMA female adapter operates to 18 GHz. The Ebeestock RF adapter provides excellent VSWR of 1.25:1 maximum. This RF SMA to SMA 4 hole flange adapter allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Ebeestock also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications			
Erequency Range	DC	18	GHz
VSWR		1.25:1	

Mechanical Specifications

 Size

 Length
 0.98 in [24.89 mm]

 Width
 0.5 in [12.7 mm]

 Height
 0.5 in [12.7 mm]

 Weight
 0.015 lbs [6.8 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Male to SMA Female 4 Hole Flange Mount Adapter ET12755



SMA Male to SMA Female 4 Hole Flange Mount Adapter



RF Adapters Technical Data Sheet ET12755

Description	Connector 1	Connector 2	
Туре	SMA Male	SMA Female	
Polarity	Standard	Standard	
nterface Specification	MIL-STD-348 MIL-STD-348		
Hex Size	5/16 in.		
Mating Torque	8 to 10 in-lbs [0.90 to 1.13 Nm]		

Material Specifications

	Connector 1		Connector 2	
Description	n Material	Plating	Material	Plating
Туре	SMA Male		SMA Female	
Contact	Beryllium Copper	Gold	Beryllium Copper	Gold
Outer Conductor			Passivated Stainless Steel	
Body	Passivated Stainless Steel			
Coupling Nut	Passivated Stainless Steel			

Environmental Specifications

Temperature

Operating Range

-65 to +125 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Male to SMA Female 4 Hole Flange Mount Adapter ET12755




SMA Male to SMA Female 4 Hole Flange Mount Adapter



RF Adapters Technical Data Sheet

ET12755

Typical Performance Data

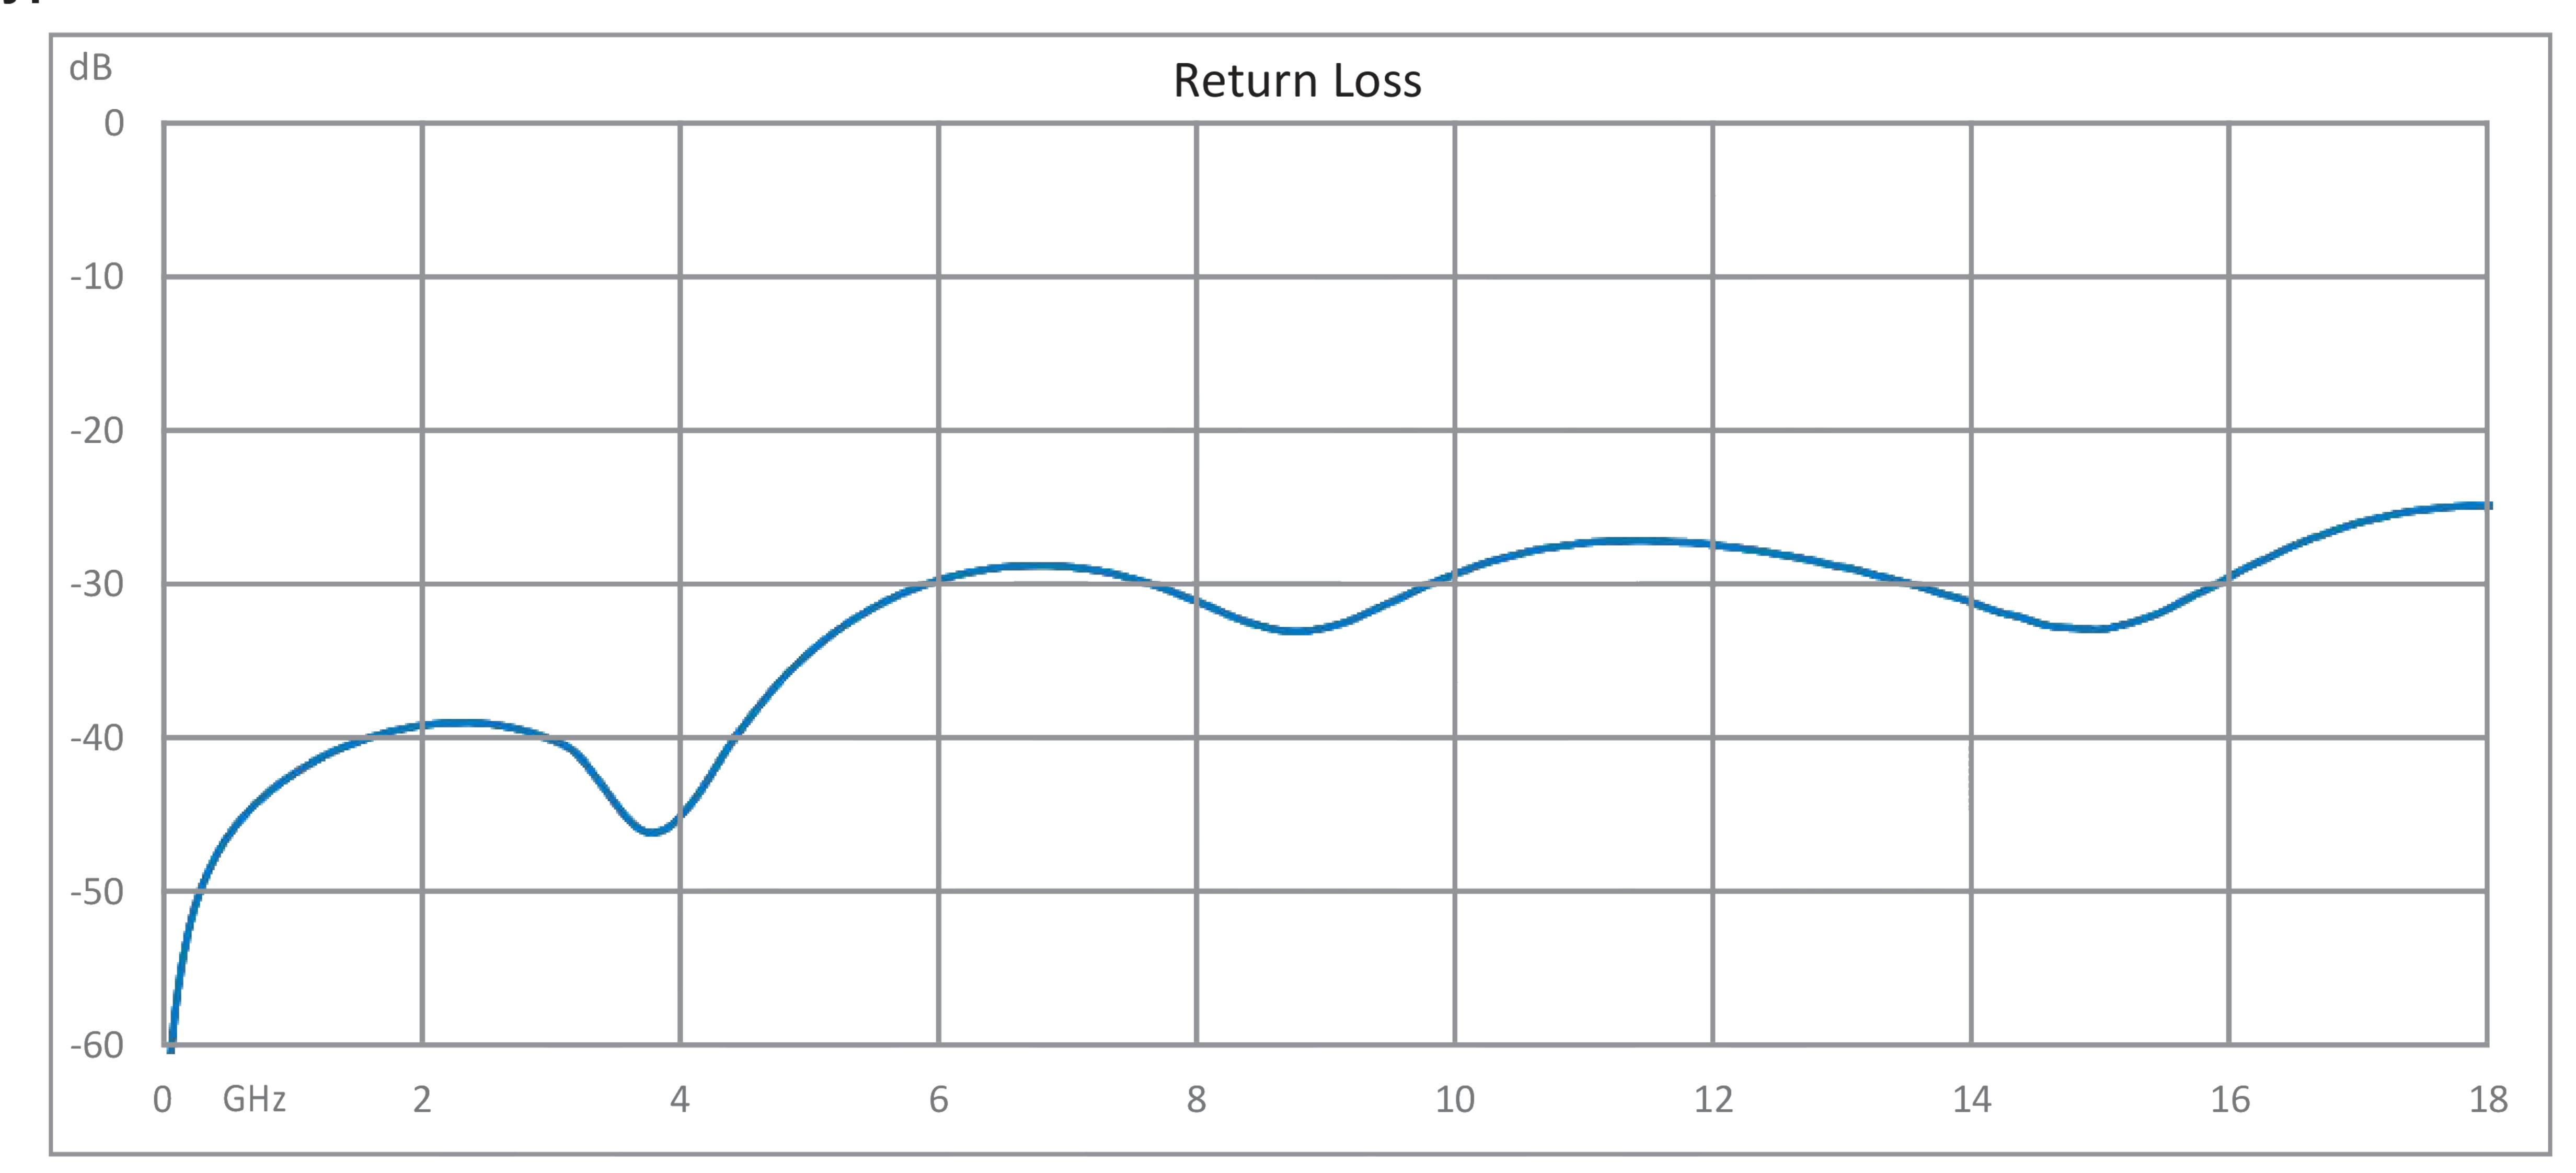

SMA Male to SMA Female 4 Hole Flange Mount Adapter from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Male to SMA Female 4 Hole Flange Mount Adapter ET12755

URL: https://www.ebeestock.com/sma-male-to-sma-female-4-hole-flange-mount-adapter-0012755

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

ET12755 CAD Drawing
SMA Male to SMA Female 4 Hole Flange Mount Adapter

