


SMC Plug to SMC Jack Right Angle Adapter

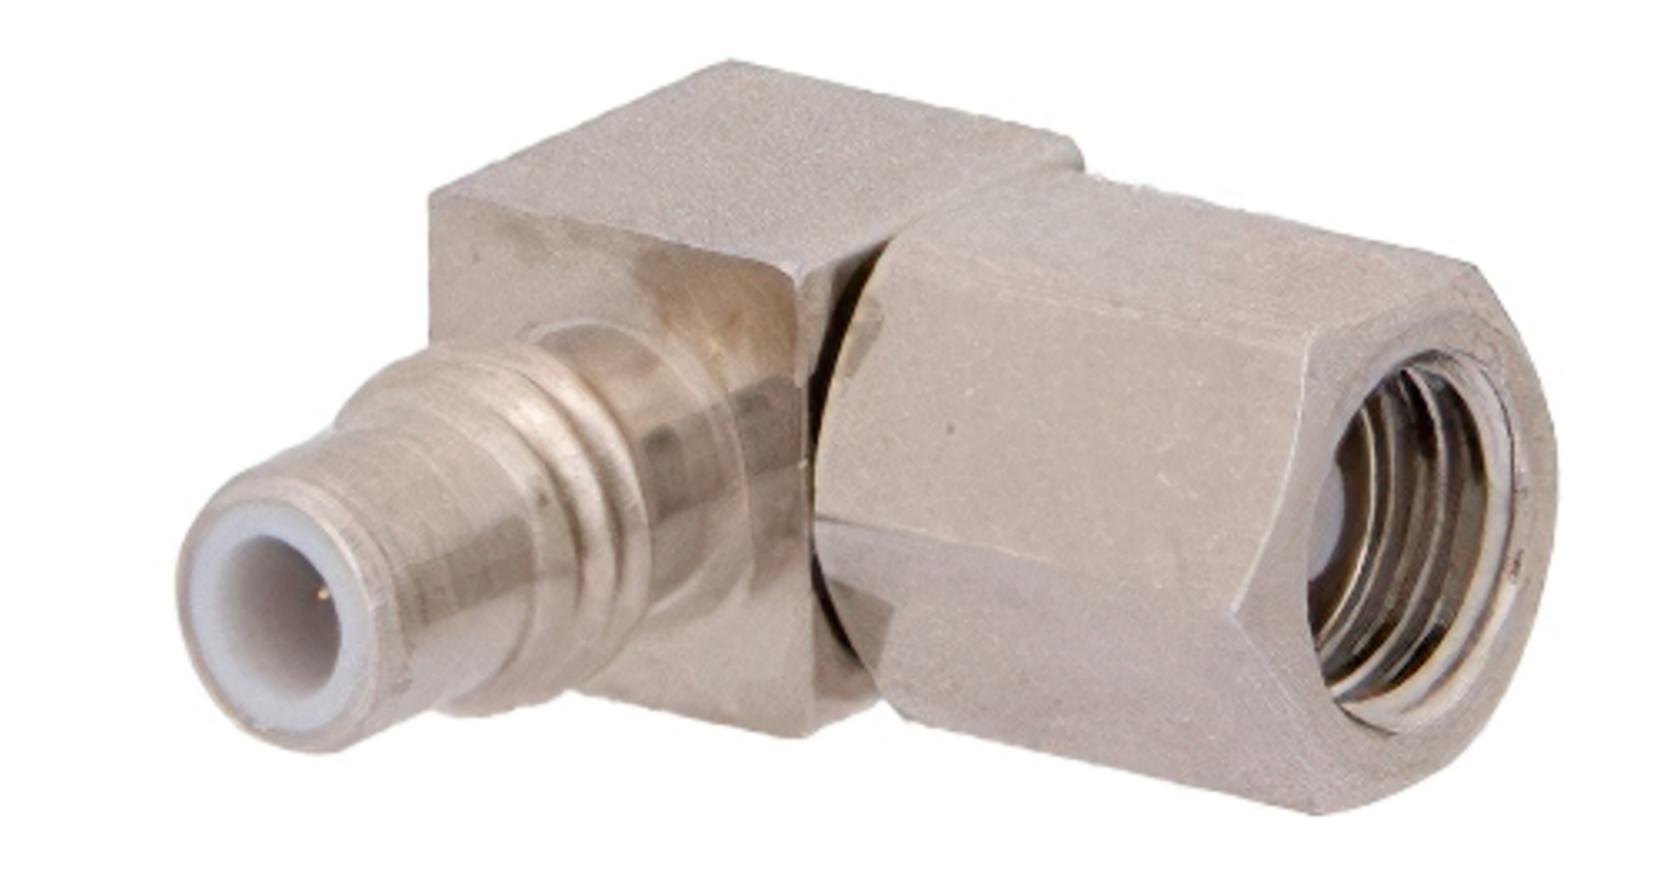

RF Adapters Technical Data Sheet

ET1279

1

Configuration

- SMC Plug Connector 1
- SMC Jack Connector 2

Features

- SMC Interface compliant with MIL-STD-348
- Gold Plated Contact

- 50 Ohms
- Right Angle Body Geometry

Applications

General Purpose Test

Contact Plating per MIL-G-45204

Description

Ebeestock's ET12791 SMC plug to SMC jack right angle adapter is part of our full line of RF components available for same- day shipping. Our SMC to SMC adapter has a plug to jack gender configuration. This low profile right angle SMC adapter allows for easier connections in tight spaces.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Ebeestock also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.


Mechanical Specifications

Size			
Length	0.56 in [14.22	mm]	
Width	0.25 in [6.35 mm] 0.54 in [13.72 mm]		
Height			
Weight	0.006 lbs [2.72 g]		
Гуре	SMC Plug	SMC Jack	
Polarity	Standard	Standard	
Interface Specification	MIL-STD-348	MIL-STD-348	
Hex Size	1/4 in.		
Mating Torque	3 to 5 in-lbs [0.34 to 0.57 Nm]		

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMC Plug to SMC Jack Right Angle Adapter ET12791



SMC Plug to SMC Jack Right Angle Adapter

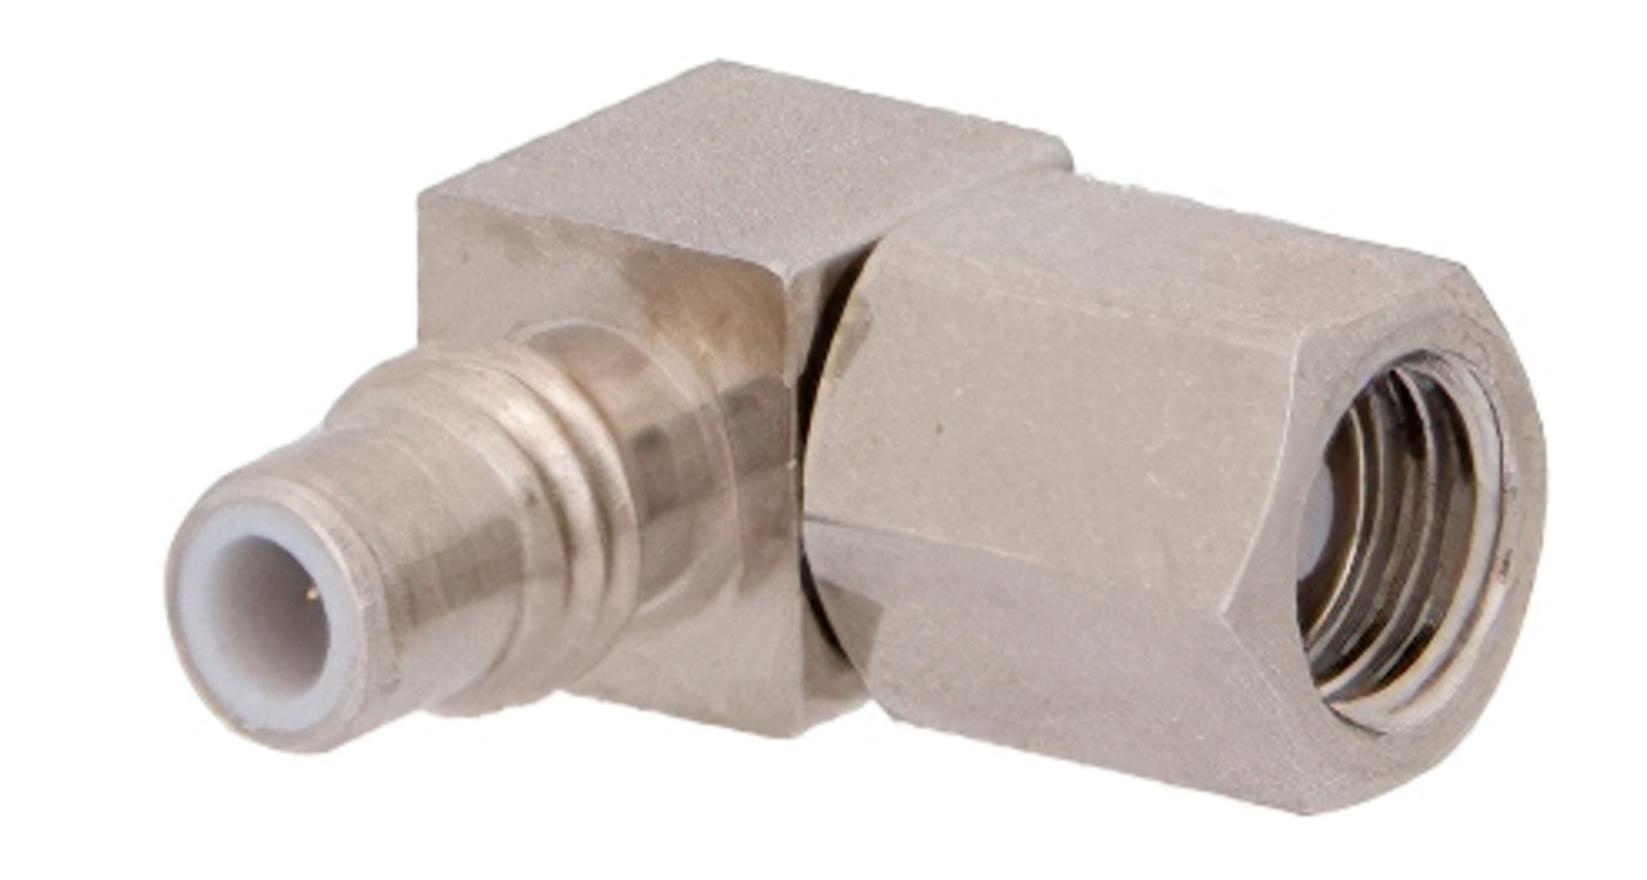

RF Adapters Technical Data Sheet ET12791

Material Specifications

	Connector 1		Connector 2	
Description	Material	Plating	Material	Plating
Туре	SMC Plug		SMC Jack	
Contact		Gold		Gold
		MIL-G-45204		MIL-G-45204
Insulation	PTFE		PTFE	
Outer Conductor			Brass	Nickel
				QQ-N-290
Body	Brass	Nickel		
		QQ-N-290		
Coupling Nut	Brass	Nickel		
		QQ-N-290		

Environmental Specifications

Temperature

Operating Range

-65 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

SMC Plug to SMC Jack Right Angle Adapter from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMC Plug to SMC Jack Right Angle Adapter ET12791

URL: https://www.ebeestock.com/smc-plug-to-smc-jack-right-angle-adapter-0012791

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

ET12791 CAD Drawing
SMC Plug to SMC Jack Right Angle Adapter

