

TNC Female to RP-TNC Male Adapter



RF Adapters Technical Data Sheet

ET1284

Configuration

- TNC Female Connector 1
- TNC Male Reverse Polarity Connector 2

Features

- Max VSWR of 1.32:1 up to 6 GHz
- TNC Interface compliant with MIL-STD-348
- Gold Plated Contact

Straight Body Geometry

• 50 Ohms

Contact Plating per MIL-G-45204


Applications

General Purpose Test

Description

Ebeestock's ET12840 TNC female to reverse polarity TNC male adapter is part of our full line of RF components available for same-day shipping. Our TNC to reverse polarity TNC adapter has a female to male gender configuration. ET12840 TNC female to reverse polarity TNC male adapter operates to 6 GHz. The Ebeestock RF adapter provides good VSWR of 1.32:1 maximum.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Ebeestock also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

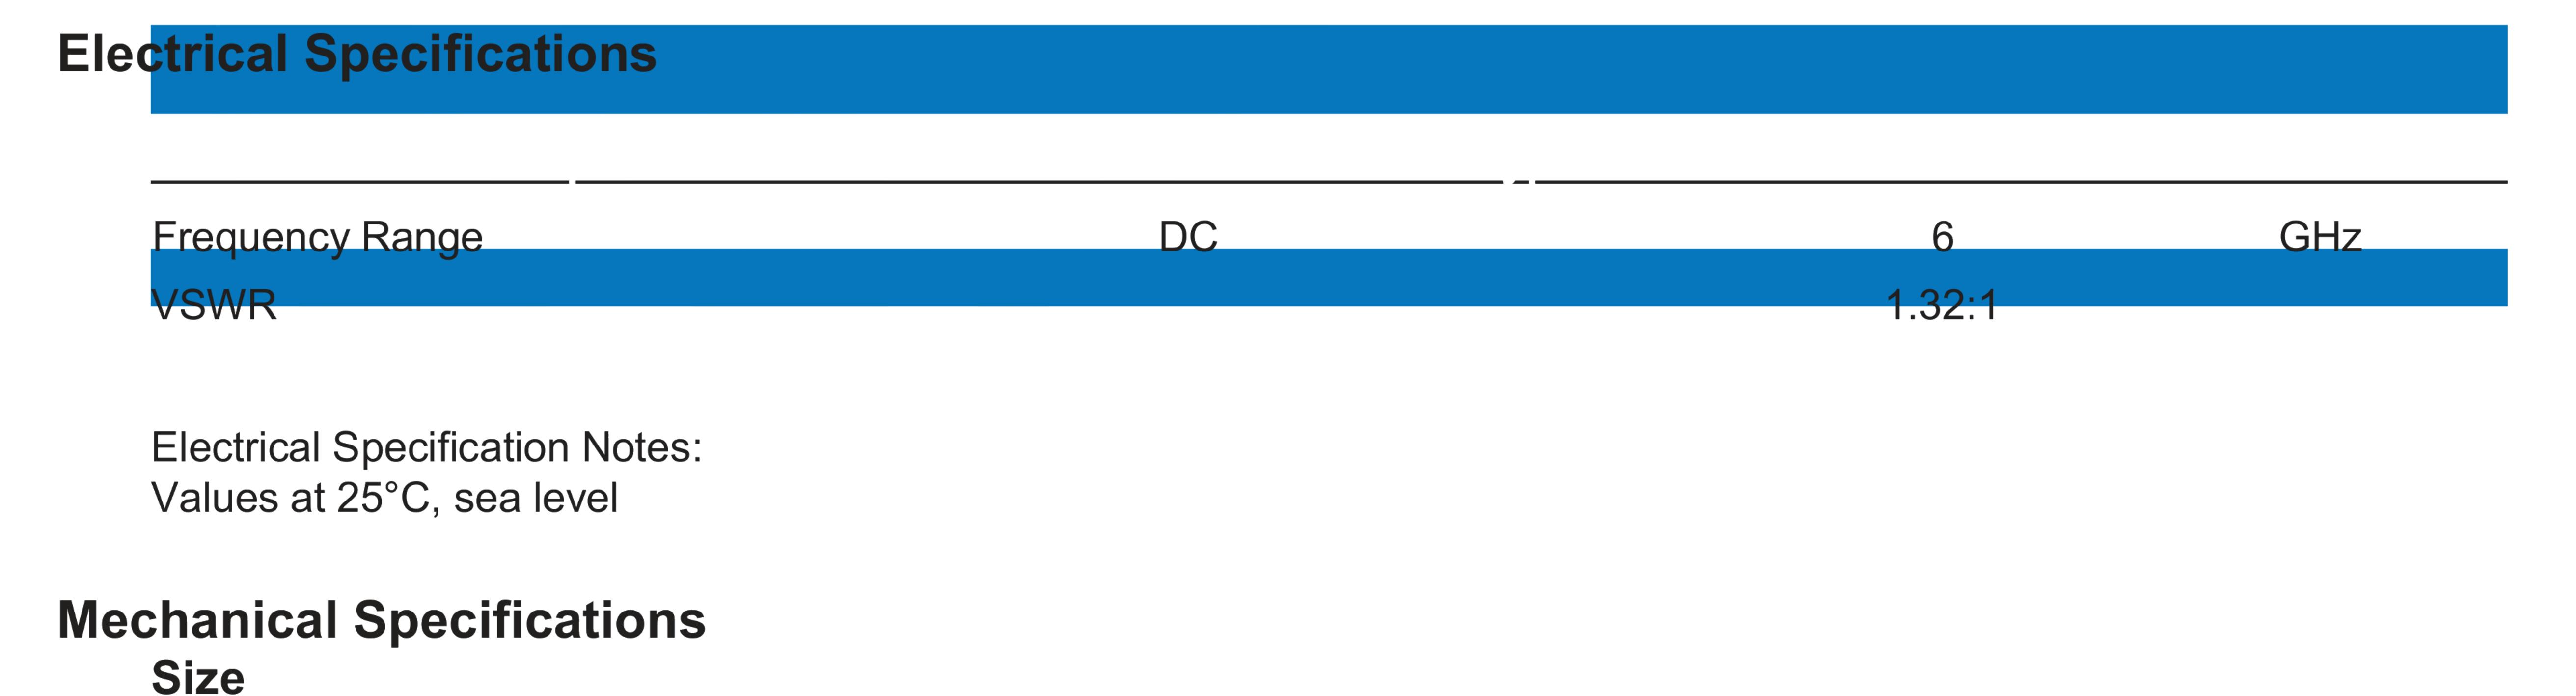

 Length
 1.22 in [30.99 mm]

 Width
 0.6 in [15.24 mm]

 Weight
 0.046 lbs [20.87 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: TNC Female to Reverse Polarity TNC Male Adapter ET12840

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



TNC Female to RP-TNC Male Adapter



RF Adapters Technical Data Sheet ET12840

Description	Connector 1	Connector 2
Туре	TNC Female	TNC Male
Polarity	Standard	Reverse Polarity
Interface Specification	MIL-STD-348	MIL-STD-348
Mating Cycles	500	500

Material Specifications

Plating
arity
Gold
MIL-G-45204
Nickel
QQ-N-290
Nickel
QQ-N-290

Environmental SpecificationsTemperature

Operating Range

-65 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: TNC Female to Reverse Polarity TNC Male Adapter ET12840



TNC Female to RP-TNC Male Adapter



RF Adapters Technical Data Sheet ET12840

TNC Female to Reverse Polarity TNC Male Adapter from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: TNC Female to Reverse Polarity TNC Male Adapter ET12840

URL: https://www.ebeestock.com/tnc-female-to-rp-tnc-male-adapter-0012840

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

ET12840 CAD Drawing
TNC Female to Reverse Polarity TNC Male Adapter

