



RF Cable Assemblies Technical Data Sheet

ET13292

Configuration

Connector 1: 1.85mm Male
Connector 2: 2.92mm Male
Cable Type: ET-SR047TNLL

Features

- Max Frequency 45 GHz
- 76.5% Phase Velocity
- 500 Mating Cycles
- Maximum Cable Assembly Length of 5 Feet

Applications

General Purpose

Laboratory Use

Description

Ebeestock's ET13292 1.85mm male to 2.92mm male 48 inch cable using 047 coax is part of our full line of RF com- ponents available for same-day shipping. Ebeestock's semi-rigid RF cable assemblies are ideal for high performance appli- cations and can be formed, using proper tooling, to the routing pattern required. This Ebeestock 1.85mm to 2.92mm cable assembly has a male to male gender configuration with 50 ohm semi-rigid ET-SR047TNLL coax. The ET13292 1.85mm male to 2.92mm male cable assembly operates to 45 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		45	GHz
VSWR			1.4:1	
Velocity of Propagation		76.5		%

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	5	10	18	26.5	GHz
Insertion Loss (Typ.)	0.9	2.9	4.1	5.54	6.82	dB

Electrical Specification Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 1.85mm Male to 2.92mm Male Low Loss Cable 48 Inch Length Using 047 Coax ET13292

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.





RF Cable Assemblies Technical Data Sheet

ET13292

The Insertion Loss data above is based on the performance specifications of the coax cable used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.04*SQRT(FGHz) dB maximum per connector.

Mechanical Specifications

Cable Assembly

Length* 48 in [121.92 cm] 0.35 in [8.89 mm] Diameter

Cable

Cable Type ET-SR047TNLL Impedance 50 Ohms Inner Conductor Type Solid

Inner Conductor Material and Plating Copper, Silver Microporous PTFE Dielectric Type

Number of Shields

Outer Conductor Material and Plating Copper, Tin

One Time Minimum Bend Radius 0.125 in [3.18 mm]

Connectors

Description	Connector 1	Connector 2	
Туре	1.85mm Male	2.92mm Male	
Impedance	50 Ohms	50 Ohms	
Mating Cycles	500	500	
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold	
Contact Plating Specification	ASTM-B488	ASTM-B488	
Dielectric Type	PTFE	PTFE	
Body Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold	
Body Plating Specification	ASTM-B488	ASTM-B488	
Coupling Nut Material and Plating	Steel	Steel	
Torque	8 in-lbs [0.9 Nm]	8 in-lbs [0.9 Nm]	

Environmental Specifications

Temperature

Operating Range -65 to +150 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 1.85mm Male to 2.92mm Male Low Loss Cable 48 Inch Length Using 047 Coax ET13292

www.ebeestock.com

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen, 523900, Dongguan, Guangdong, China.






RF Cable Assemblies Technical Data Sheet

ET13292

Typical Performance Data

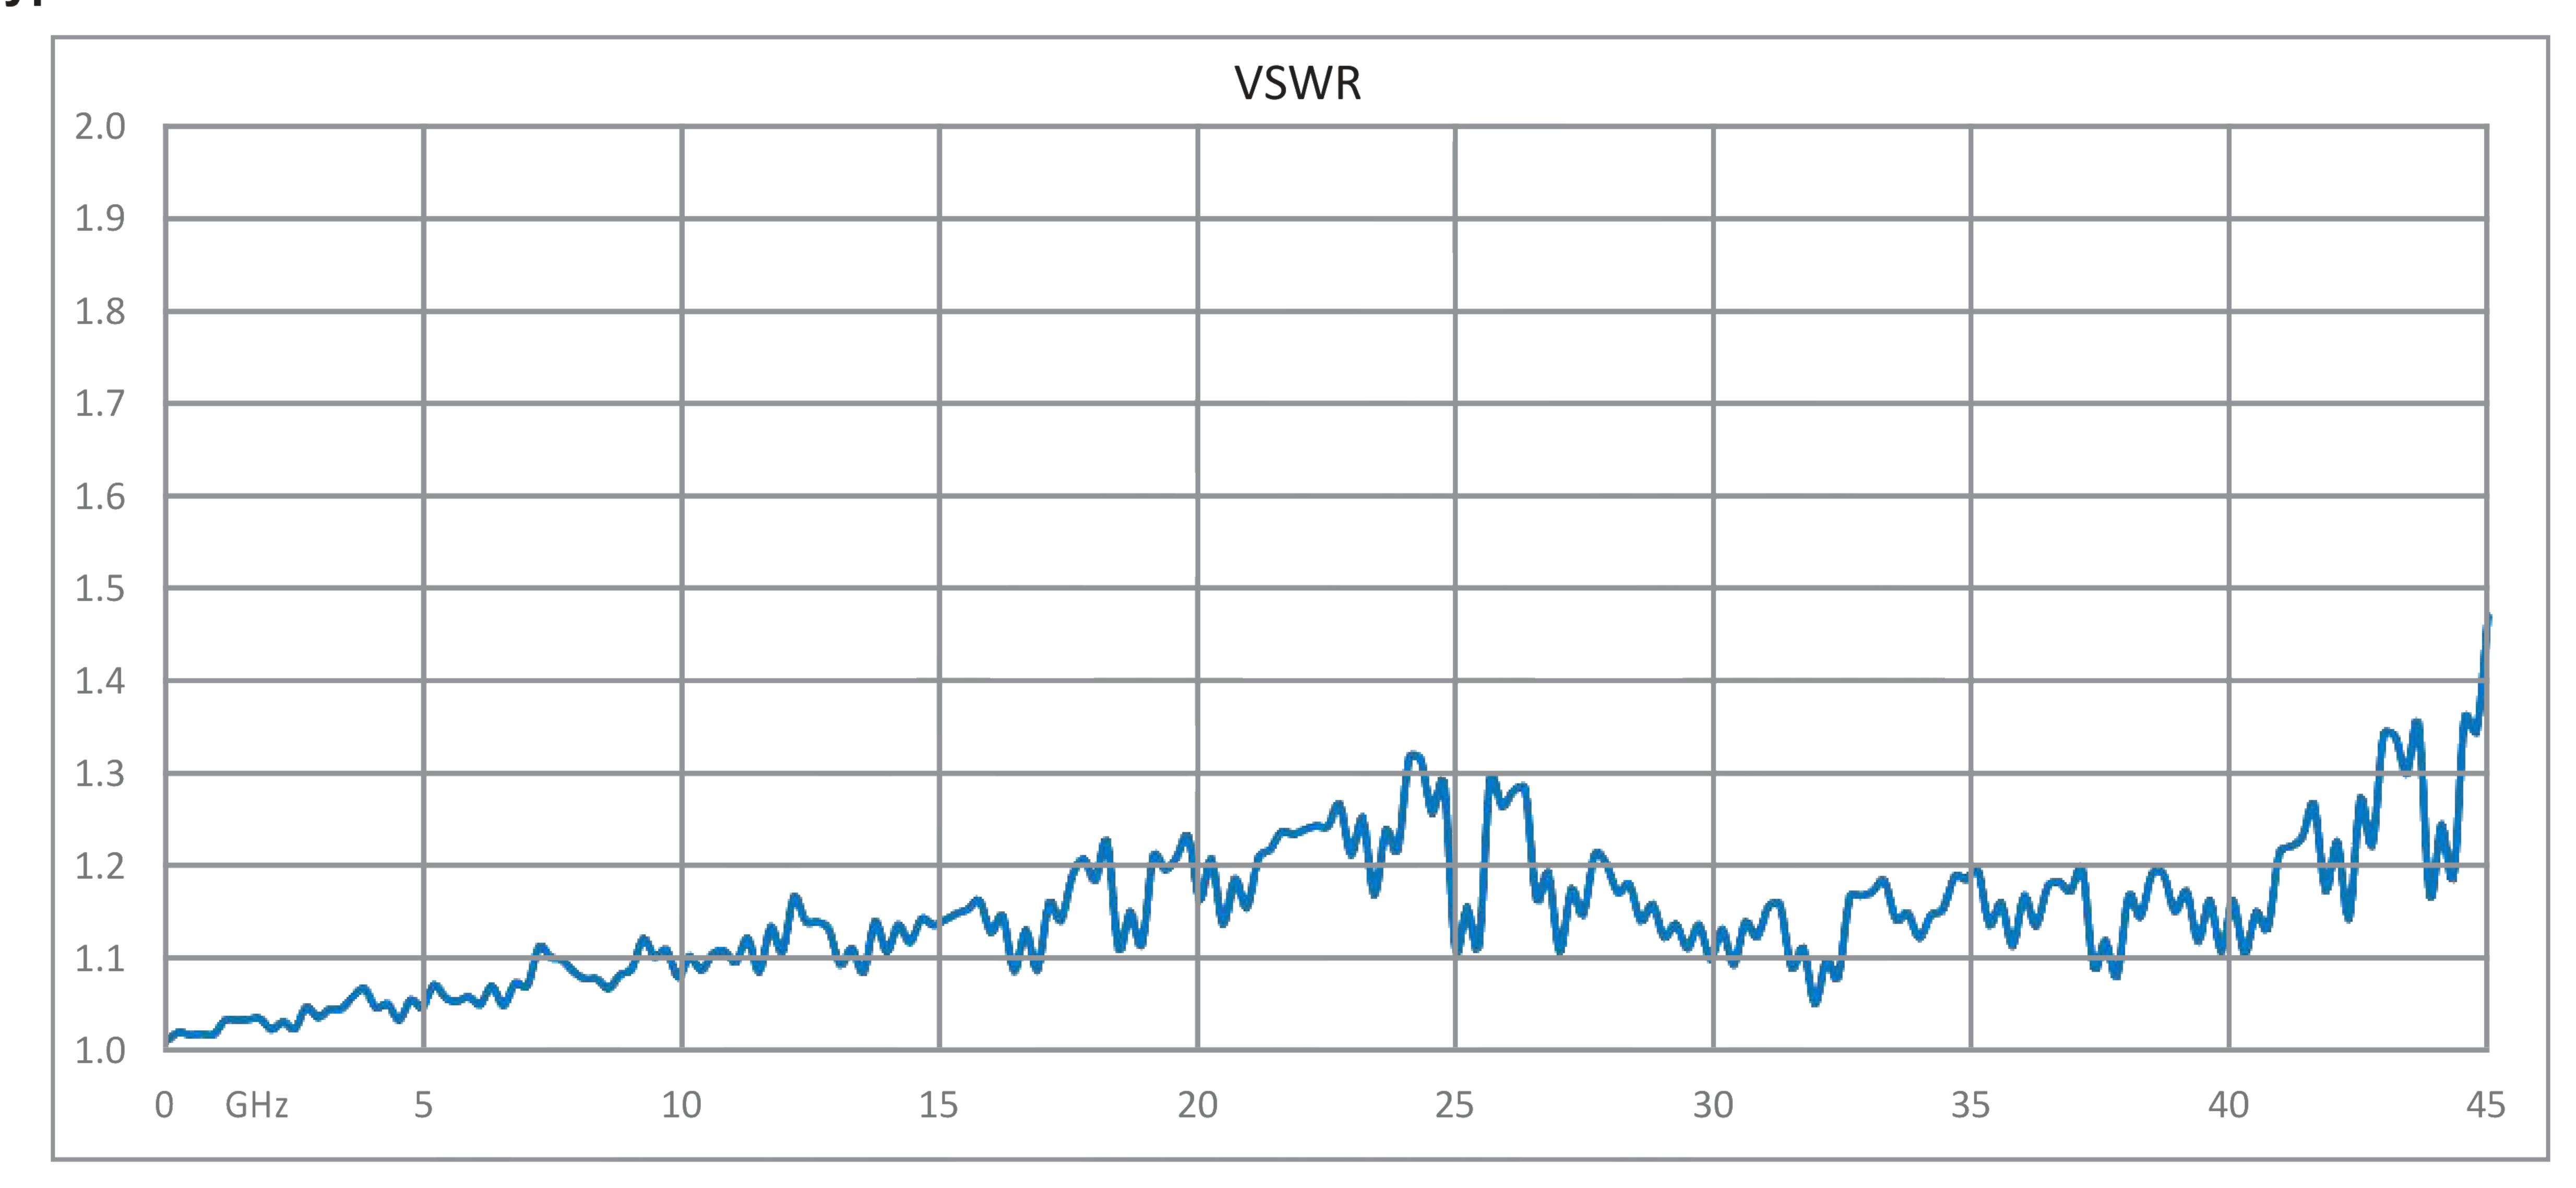

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 1.85mm Male to 2.92mm Male Low Loss Cable 48 Inch Length Using 047 Coax ET13292





RF Cable Assemblies Technical Data Sheet

ET13292

How to Order

Part Number Configuration:

ET3C6488
- xx uu

——Unit of Measure:

cm = Centimeters

Example: ET3C6488-12 = 12 inches long cable ET3C6488-100cm = 100 cm long cable

1.85mm Male to 2.92mm Male Low Loss Cable 48 Inch Length Using 047 Coax from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 1.85mm Male to 2.92mm Male Low Loss Cable 48 Inch Length Using 047 Coax ET13292

URL: https://www.ebeestock.com/1-85mm-male-to-2-92mm-male-low-loss-cable-6-inch-length-using-04 7-coax-0013287

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.

