


4.1/9.5 Mini DIN Male to 4.1/9.5 Mini DIN Male LSZH Jacketed Low PIM Cable 200 cm Length Using SR402FLJ Low PIM Coax with HeatShrink

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	08/05/19	S.ELLIS

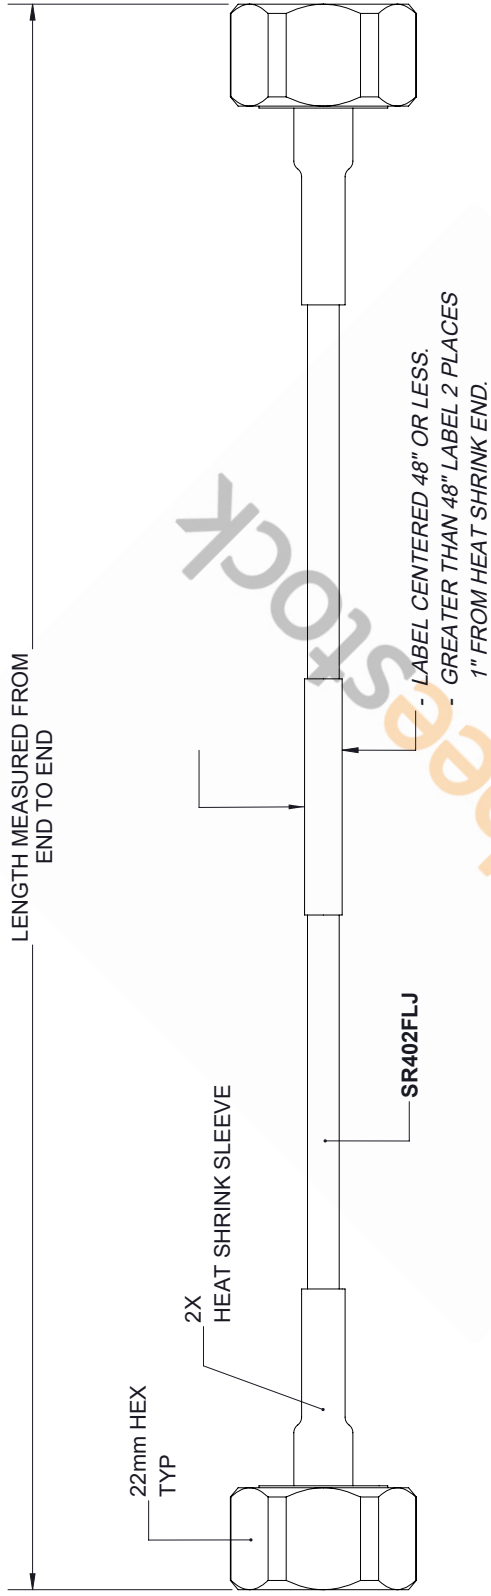

4.1/9.5 Mini DIN
MALE

4.1/9.5 Mini DIN
MALE

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS TOLERANCES: X±.2 [5.08] FRACTIONS .XX±.01 [.25] ±.132 .XXX±.005 [.13] ANGLES ± 1° ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY. THIRD-ANGLE PROJECTION			THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF 000000000 CORPORATION. ALL RIGHTS RESERVED. SHEET 1 OF 1 SCALE N/A	
	8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5, HUMEN 523900, DONGGUAN, GUANGDONG, CHINA WEBSITE: www.ebeestock.com EMAIL: sales@ebeestock.com		PART NUMBER ÖVFFUJH	REV A
SIZE A	CAGE 53919	DRAWN BY K.DANG	THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.	