


4.1/9.5 Mini DIN Male to 4.1/9.5 Mini DIN Female Cable 50 Cm Length Using 1/4 inch Super lexible Coax

| REVISIONS | | | |
|-----------|-----------------|-----------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 1/12/2021 | S.ELLIS |

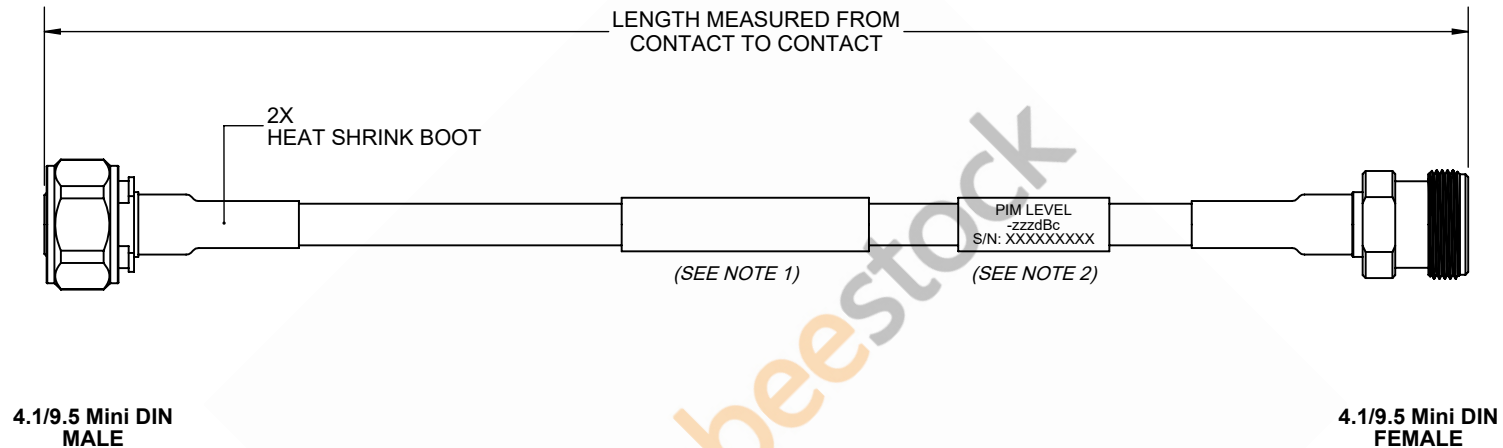

NOTES:

1. CABLES 84" AND UNDER HAVE 1 LABEL CENTERED. CABLES OVER 84" HAVE 2 LABELS, ONE AT EACH END 12.0" FROM THE END OF THE CONNECTOR.
2. 6" FROM CABLE END 1 PLACE FOR ALL LENGTHS OF CABLE.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

| | |
|--------------------------------------------------------------------------------------------|------------------|
| UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS | |
| TOLERANCES: | |
| .X = ±.2 [.508] | FRACTIONS ± 1/32 |
| .XX = ±.02 [.51] | ANGLES ± 1° |
| .XXX = ±.005 [.13] | |
| CABLE LENGTH (L) TOLERANCES: | |
| L ≤ 12 [305] = +1 [25] / -0 | |
| 12 [305] < L ≤ 60 [1524] = +2 [51] / -0 | |
| 60 [1524] < L ≤ 120 [3048] = +4 [102] / -0 | |
| 120 [3048] < L ≤ 300 [7620] = +6 [152] / -0 | |
| 300 [7620] < L = +5%L / -0 | |
| ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY. | |



8TH FLOOR, BUILDING 1,
YONGFU SCIENCE AND TECHNOLOGY
CENTER INDUSTRIAL PARK, NANZHA DISTRICT
5, HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA

WEBSITE: www.ebeestock.com
EMAIL: sales@ebeestock.com

| | |
|-----------------------------------------------------------------------------------------------------------|--------|
| THIRD-ANGLE PROJECTION | |
| | |
| THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF EBEESTOCK CORPORATION ALL RIGHTS RESERVED. | |
| SHEET | 1 OF 1 |
| SCALE | N/A |

| | | | | |
|------|-----------|----------|----------|-----|
| SIZE | CAGE CODE | DRAWN BY | ITEM NO. | REV |
| A | 53919 | K.DANG | ET14126 | A |