
4.1/9.5 Mini DIN Male to 4.1/9.5 Mini DIN Male Low PIM Cable 12 Inch Length Using TFT-402 Coax Using Times Microwave Components

	REVISIONS				
	REV.	DESCRIPTION	DATE	APPROVED	
	Α	INITIAL RELEASE	04/07/2021	SELLIS	
	В	ADD PIM LABEL, UPDATE NOTES	8/3/21		

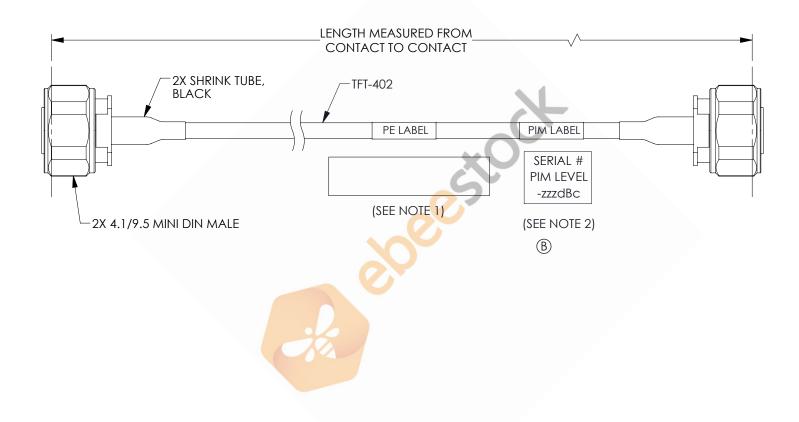

NOTES:

- 1. CABLES 84" AND UNDER HAVE 1 LABEL CENTERED. CABLES OVER 84" HAVE 2 LABELS, ONE AT EACH END 12" FROM THE FRONT OF THE CONNECTOR.
- 2. PIM LABEL 6" FROM CABLE END 1 PLACE.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES: $.X = \pm .2$ [5.08] $.XX = \pm .02$ [.51] ± 1/32 $.XXX = \pm .005[.13]$ ANGLES ± 1° CABLE LENGTH (L) TOLERANCES:

L ≤ 12 [305] = +1 [25] / -0 12 [305] < L ≤ 60 [1524] = +2 [51] / -0 60 [1524] < L ≤ 120 [3048] = +4 [102] / -0 120 [3048] < L ≤ 300 [7620] = +6 [152] / -0 300 [7620] < L = +5%L / -0

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY



8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5.HUMEN.523900.DONGGUAN, GUANGDONG, CHINA

WEBSITE: www.ebeestock.com EMAIL: sales@ebeestock.com

THIRD-ANGLE PROJECTION				
⊕				
THE INFORMATION AND				
DESIGN IN THIS DOCUMENT IS THE PROPERTY OF				
13 THE PROPERTY OF				

EBEESTOCK CORPORATION ALL RIGHTS RESERVED.

SHEET SCALE N/A

SIZE CAGE CODE DRAWN BY 53919

DFRISIELLO

ITEM NO.

REV ET14166

В

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.