

4.1/9.5 Mini DIN Female to Snap-On 4.3-10 Male Low PIM Cable 50 CM Length Using TFT-402 Coax Using Times Microwave Components



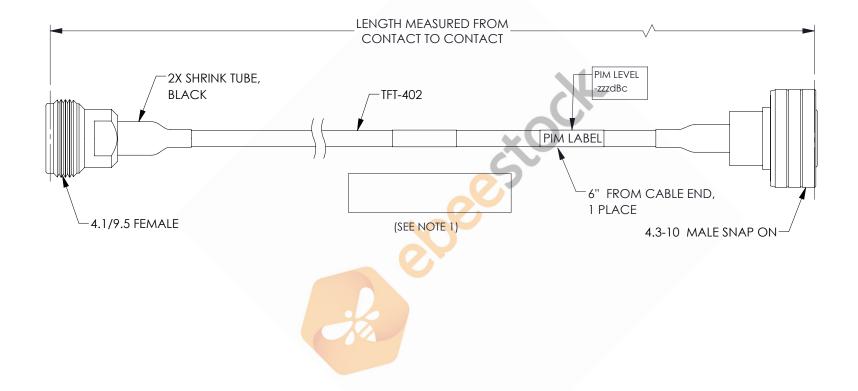

## **NOTES:**

CABLES 84" AND UNDER HAVE 1 LABEL CENTERED. CABLES OVER 84" HAVE 2 LABELS, ONE AT EACH END 12.0" FROM THE FRONT OF THE CONNECTOR.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS

## TOLERANCES: $.X = \pm .2$ [5.08] $.XX = \pm .02$ [.51] ± 1/32 $.XXX = \pm .005[.13]$ ANGLES ± 1° CABLE LENGTH (L) TOLERANCES:

L ≤ 12 [305] = +1 [25] / -0 12 [305] < L ≤ 60 [1524] = +2 [51] / -0 60 [1524] < L ≤ 120 [3048] = +4 [102] / -0 120 [3048] < L ≤ 300 [7620] = +6 [152] / -0 300 [7620] < L = +5%L / -0

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY



8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5, HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA

> WEBSITE: www.ebeestock.com EMAIL: sales@ebeestock.com



EBEESTOCK CORPORATION ALL RIGHTS RESERVED.

SHEET SCALE N/A

SIZE CAGE CODE DRAWN BY 53919 MVEERAPPAN

ITEM NO.

ET14225

REV Α