
LENGTH MEASURED FROM CONTACT TO CONTACT

TFT-402-LF

(SEE NOTE 1)

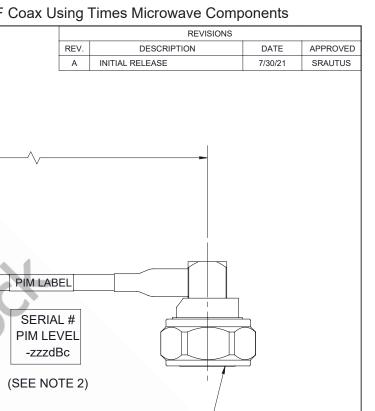

## NOTES:

CABLES 84" AND UNDER HAVE 1 LABEL CENTERED.
 CABLES OVER 84" HAVE 2 LABELS, ONE AT EACH END
 12" FROM THE FRONT OF THE CONNECTOR.

4.1/9.5 MINI DIN MALE

2X SHRINK TUBE,

**BLACK** 

2. PIM LABEL 6" FROM CABLE END 1 PLACE.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS

## | TOLERANCES: | X = ±.2 | [5.08] | FRACTIONS | XX = ±.02 | [.51] | ±1/32 | XXX = ±.005 [.13] | ANGLES ±1° | CABLE LENGTH (L) TOLERANCES:

L ≤ 12 [305] = +1 [25] /-0 12 [305] < L ≤ 60 [1524] = +2 [51] /-0 60 [1524] < L ≤ 120 [3048] = +4 [102] /-0 120 [3048] < L ≤ 300 [7620] = +6 [152] /-0 300 [7620] < L = +5%L /-0

ALL DIMENSIONS SHOWN
ARE FOR REFERENCE ONLY.

**ebeestock** 

4.3-10 MALE RIGHT ANGLE

8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5,HUMEN,523900,DONGGUAN, GUANGDONG, CHINA

> WEBSITE: www.ebeestock.com EMAIL: sales@ebeestock.com

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF EBEESTOCK CORPORATION

SHEET OF 1 SCALE N/A

SIZE CAGE CODE DRAWN BY
A 53919 DM

N BY ITEM

ITEM NO. ET14420

REV A

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.