


# Outdoor Rated 4.3-10 Female to N Male Right Angle Low PIM Cable 24 Inch Length Using SPO-250 Coax Using Times Microwave Parts

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/09/19	S.ELLIS

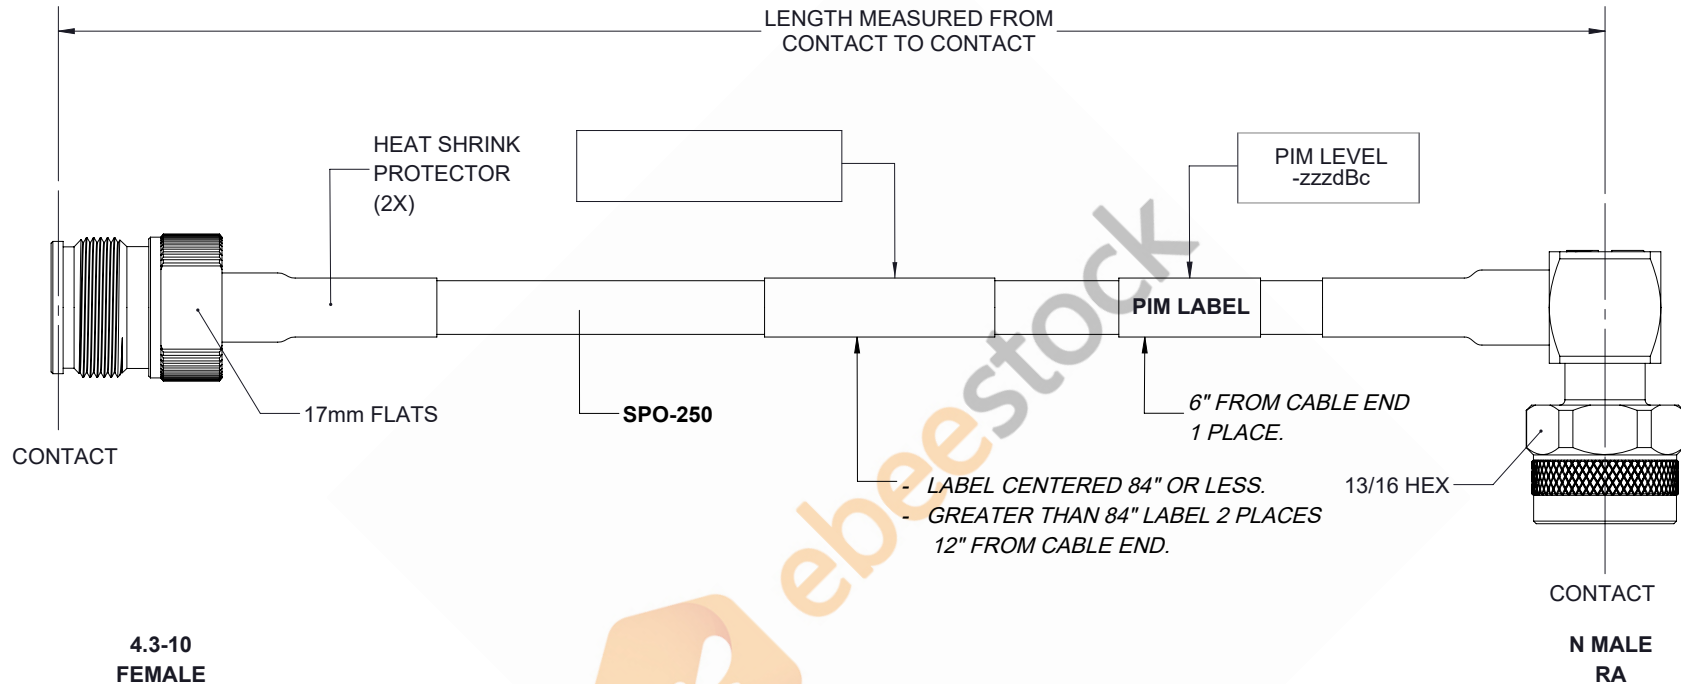

**4.3-10  
FEMALE**

**N MALE  
RA**



THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS <b>TOLERANCES:</b> .X±.2 [ 5.08]      FRACTIONS .XX±.01 [ .25]      ± 1/32 .XXX±.005 [ .13]      ANGLES ± 1° ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY. THIRD-ANGLE PROJECTION		<p>8TH FLOOR, BUILDING 1,                  YONGFU SCIENCE AND TECHNOLOGY                  CENTER INDUSTRIAL PARK, NANZHA DISTRICT                  5, HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA</p> WEBSITE: <a href="http://www.ebeestock.com">www.ebeestock.com</a> EMAIL: <a href="mailto:sales@ebeestock.com">sales@ebeestock.com</a>		THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF EBEESTOCK CORPORATION. ALL RIGHTS RESERVED. SHEET 1 OF 1 SCALE N/A	
SIZE	CAGE	DRAWN BY	PART NUMBER	REV	
A	53919	K.DANG	ET14940	A	