


Fire Rated 7/16 DIN Male Right Angle to 7/16 DIN Female Low PIM Cable 60 Inch Length Using SPF-250 Coax Using Times Microwave Parts

| REVISIONS | | | |
|-----------|-----------------|-----------|------------|
| REV. | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 9/21/2021 | A. GANWANI |

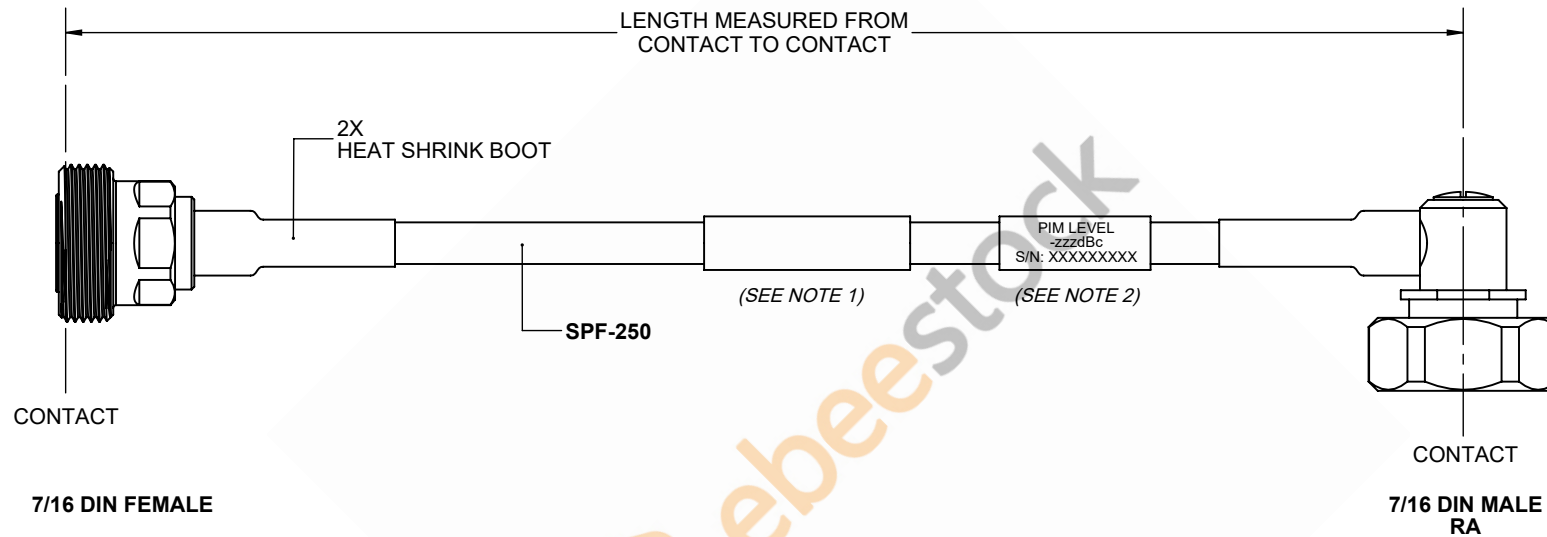

NOTES:

1. CABLES 84" AND UNDER HAVE 1 LABEL CENTERED. CABLES OVER 84" HAVE 2 LABELS, ONE AT EACH END 12.0" FROM THE END OF THE CONNECTOR.
2. 6" FROM CABLE END 1 PLACE FOR ALL LENGTHS OF CABLE.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

| | | | |
|--------------|--------|-----------|--------|
| .X = ±.2 | [.508] | FRACTIONS | |
| .XX = ±.02 | [.51] | | ± 1/32 |
| .XXX = ±.005 | [.13] | ANGLES | ± 1° |

CABLE LENGTH (L) TOLERANCES:

| | | | | |
|----------------------|--------|-------|-------|------|
| L ≤ 12 | [305] | = +1 | [25] | / -0 |
| 12 [305] < L ≤ 60 | [1524] | = +2 | [51] | / -0 |
| 60 [1524] < L ≤ 120 | [3048] | = +4 | [102] | / -0 |
| 120 [3048] < L ≤ 300 | [7620] | = +6 | [152] | / -0 |
| 300 [7620] < L | | = +5% | L | / -0 |


ALL DIMENSIONS SHOWN
ARE FOR REFERENCE ONLY.



8TH FLOOR, BUILDING 1,
YONGFU SCIENCE AND TECHNOLOGY
CENTER INDUSTRIAL PARK, NANZHA DISTRICT
5, HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA

WEBSITE: www.ebeestock.com
EMAIL: sales@ebeestock.com

THIRD-ANGLE PROJECTION



THE INFORMATION AND
DESIGN IN THIS DOCUMENT
IS THE PROPERTY OF
EBEESTOCK CORPORATION
ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE N/A

| | | | | |
|------|-----------|----------|----------|-----|
| SIZE | CAGE CODE | DRAWN BY | ITEM NO. | REV |
| A | 53919 | K.DANG | ET16944 | A |