


# Fire Rated 7/16 DIN Male to N Male Low PIM Cable 60 Inch Length Using SPF-375 Coax Using Times Microwave Parts

| REVISIONS |                 |           |            |
|-----------|-----------------|-----------|------------|
| REV.      | DESCRIPTION     | DATE      | APPROVED   |
| A         | INITIAL RELEASE | 9/21/2021 | A. GANWANI |

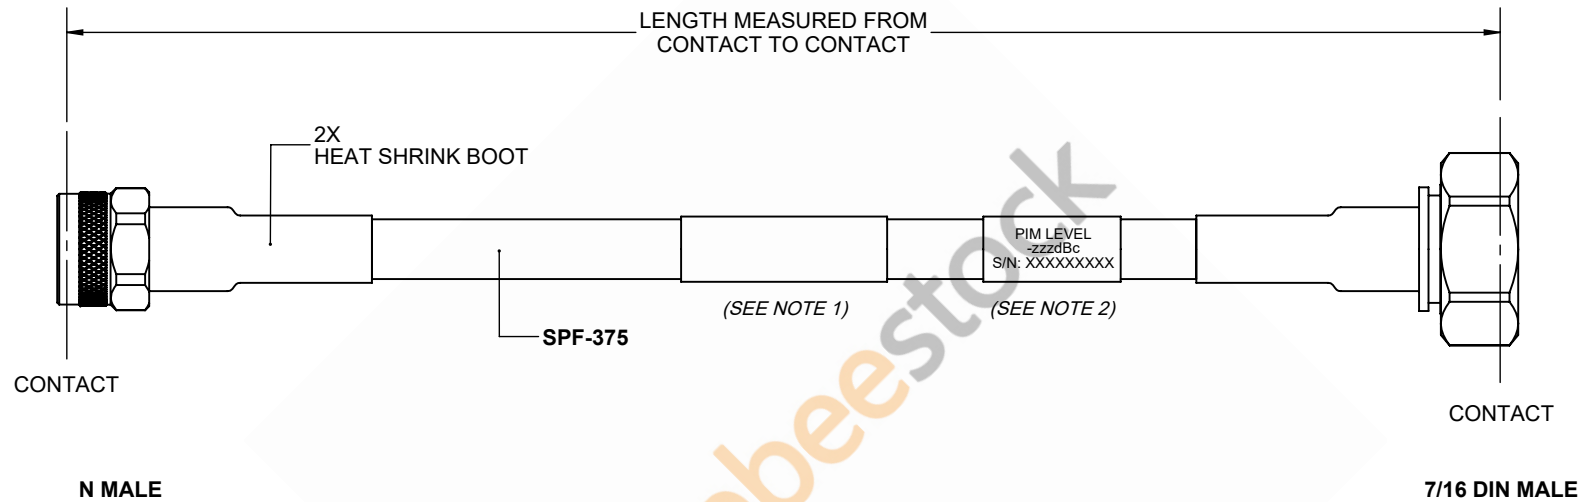

**NOTES:**

1. CABLES 84" AND UNDER HAVE 1 LABEL CENTERED. CABLES OVER 84" HAVE 2 LABELS, ONE AT EACH END 12.0" FROM THE END OF THE CONNECTOR.
2. 6" FROM CABLE END 1 PLACE FOR ALL LENGTHS OF CABLE.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

|  |           |  |          |   |  |
|--|-----------|--|----------|---|--|
| UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS<br><b>TOLERANCES:</b><br>.X = ±.2 [ .508 ]      FRACTIONS ± 1/32<br>.XX = ±.02 [ .51 ]      ± 1/32<br>.XXX = ±.005 [ .13 ]      ANGLES ± 1°<br><b>CABLE LENGTH (L) TOLERANCES:</b><br>L ≤ 12 [305] = +1 [25] / -0<br>12 [305] < L ≤ 60 [1524] = +2 [51] / -0<br>60 [1524] < L ≤ 120 [3048] = +4 [102] / -0<br>120 [3048] < L ≤ 300 [7620] = +6 [152] / -0<br>300 [7620] < L = +5%L / -0<br>ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY. |           | <p>8TH FLOOR, BUILDING 1,<br/>YONGFU SCIENCE AND TECHNOLOGY<br/>CENTER INDUSTRIAL PARK, NANZHA DISTRICT<br/>5, HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA<br/>WEBSITE: <a href="http://www.ebeestock.com">www.ebeestock.com</a><br/>EMAIL: <a href="mailto:sales@ebeestock.com">sales@ebeestock.com</a></p> |          | THIRD-ANGLE PROJECTION<br><br>THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF EBEE STOCK CORPORATION ALL RIGHTS RESERVED.<br>SHEET 1 OF 1<br>SCALE N/A |  |
| SIZE   | CAGE CODE | DRAWN BY   | ITEM NO. | REV   |  |
| A  | 53919     | K.DANG   | ET16953  | A   |  |