
Outdoor Rated 7/16 DIN Male to 7/16 DIN Male Right Angle Low PIM Cable 200 CM Length Using SPO-250 Coax Using Times Microwave Parts

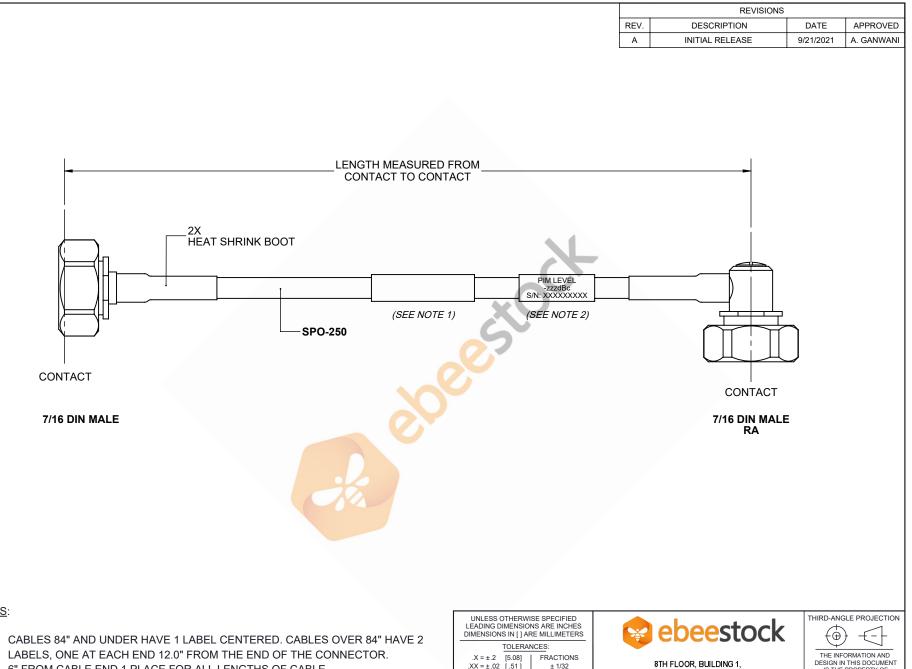

NOTES:

- 2. 6" FROM CABLE END 1 PLACE FOR ALL LENGTHS OF CABLE.

 $.XX = \pm .02$ [.51] ± 1/32 $.XXX = \pm .005[.13]$ ANGLES ± 1° CABLE LENGTH (L) TOLERANCES: L ≤ 12 [305] = +1 [25] / -0 12 [305] < L ≤ 60 [1524] = +2 [51] / -0 60 [1524] < L ≤ 120 [3048] = +4 [102] / -0 120 [3048] < L ≤ 300 [7620] = +6 [152] / -0

300 [7620] < L = +5%L / -0 ALL DIMENSIONS SHOWN

ARE FOR REFERENCE ONLY.

YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5, HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA

> WEBSITE: www.ebeestock.com EMAIL: sales@ebeestock.com

IS THE PROPERTY OF EBEESTOCK CORPORATION

ALL RIGHTS RESERVED.		
SHEET	1 OF	1
SCALE	N/A	

Α

SIZE CAGE CODE DRAWN BY 53919

K.DANG

ITEM NO. REV

ET17029

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.