


| COMPONENTS | IMPEDANCE |
|------------|-----------|
| 7/16 MALE  | 50 OHM    |
| N MALE     | 50 OHM    |
| RG393/U    | 50 OHM    |
|            |           |

| Standard Lengths |                         |
|------------------|-------------------------|
| -12              | 12"                     |
| -24              | 24"                     |
| -36              | 36"                     |
| -48              | 48"                     |
| -60              | 60"                     |
| -XXX             | Custom Length in inches |
|                  |                         |

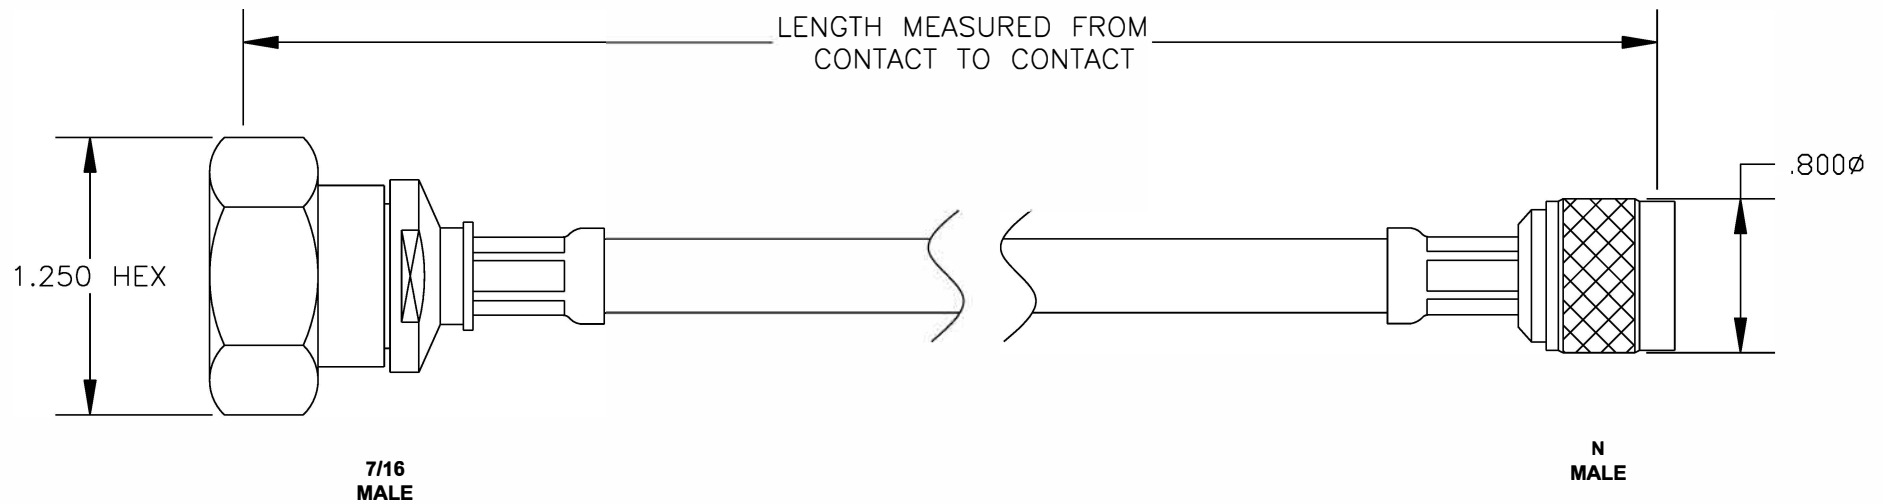


**8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5, HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA**  
 WEBSITE: [www.ebeestock.com](http://www.ebeestock.com)  
 EMAIL: [sales@ebeestock.com](mailto:sales@ebeestock.com)

|      |  |
|------|--|
| DES. | CABLE ASSEMBLY, RG393/U, 7/16 MALE TO N MALE |
|------|--|

|        |                       |          |        |       |     |      |   |     |
|--------|-----------------------|----------|--------|-------|-----|------|---|-----|
| REV. A | <b>FSCM NO. 53919</b> | CAD FILE | 013008 | SCALE | N/A | SIZE | A | 147 |
|--------|-----------------------|----------|--------|-------|-----|------|---|-----|

- NOTES:**
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
  3. DIMENSIONS ARE IN INCHES.
  4. LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $\pm 3/8"$ , WHICHEVER IS GREATER.