

COMPONENTS	IMPEDANCE	77	Standard Lengths	
7/16 MALE	50 OHM	-12	12	12"
N MALE	50 OHM	the state of the s		
		-24	24	24"
		-36	36	36"
		-48	48	48"
		-60	60	60"
		-X)	CXX	Custom Length in
ı				1
-				



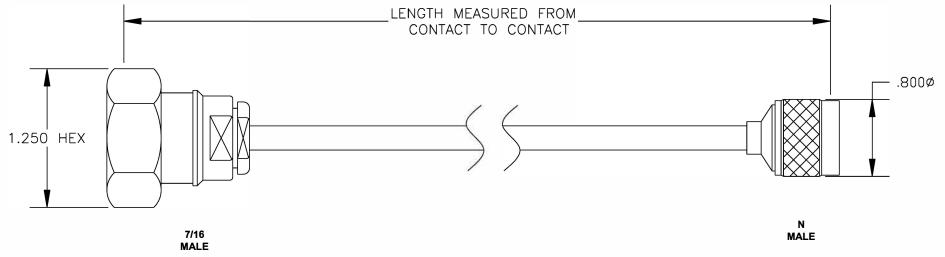

RoHS Compliance Certified

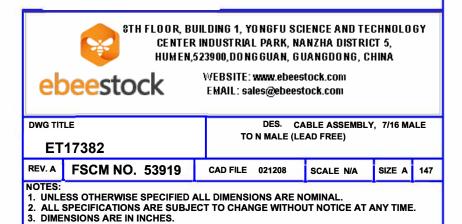

4. LENGTH TOLERANCE IS ± 1.5% OR ± 3/8", WHICHEVER IS GREATER.