



Handheld RF Analyzer Rugged Phase Stable  
Cable N Male to 7/16 DIN Female Cable 144 Inch  
Length Using Coax, RoHS

## RF Cable Assemblies Technical Data Sheet


**ET17402**

### Configuration

- Connector 1: N Male
- Connector 2: 7/16 DIN Female
- Cable Type: PE-FF430

### Features

- Excellent VSWR and Insertion Loss
- Excellent Amplitude and Phase Stability with Flexure
- Rugged Armor provides crush and torque resistance
- UV resistant jacket
- Each serialized assembly includes test data
- In stock and ready to ship



### Applications

- Field Testing
- Tower Measurements
- Base Station Analyzers
- Handheld Network Analyzers
- Portable Spectrum Analyzers
- Distance-To-Fault Measurements
- Site Maintenance

### Description

Ebeestock's Handheld RF Analyzer Phase Stable cable assemblies are designed for use with portable and handheld network analyzers, spectrum analyzers and base station analyzers. These rugged portable analyzer cable assemblies offer a unique combination of low loss, phase stability, low VSWR and durability. The tough analyzer cable armor offers crush resistance, torque resistance, water resistance and UV resistance while still maintaining a high level of flexibility. These rugged handheld analyzer cable assemblies are compatible with Fieldfox®, Site Master, CellAdvisor® and Sitehawk® analyzers, supporting site maintenance, field testing, antenna testing and distance-to-fault measurements.

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		7	GHz
VSWR			1.2:1	
Phase Stability with Flexure			1.5	Degrees
Amplitude Stability with Flexure			0.1	dB



Handheld RF Analyzer Rugged Phase Stable  
 Cable N Male to 7/16 DIN Female Cable 144 Inch  
 Length Using Coax, RoHS

## RF Cable Assemblies Technical Data Sheet

**ET17402**

### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	1	3	7			GHz
Insertion Loss (Max.)	1.61	2.98	4.92			dB
Power Handling (Max.)	522	277	190			Watts

Electrical Specification Notes:  
 Values at 25°C, sea level.

### Mechanical Specifications

#### Cable Assembly

Length\* 144 in [365.76 cm]  
 Weight 1.972 lbs [894.48 g]

#### Cable

Impedance 50 Ohms  
 Inner Conductor Type Solid  
 Inner Conductor Material and Plating Copper, Silver  
 Dielectric Type PTFE  
 Number of Shields 6  
 Shield Layer 1 Silver Plated Copper Tape  
 Shield Layer 2 Metalized Polyimide  
 Shield Layer 3 Silver Plated Copper Braid  
 Jacket Material TPE  
 Jacket Diameter 0.43 in [10.92 mm]  
 One Time Minimum Bend Radius 1.5 in [38.1 mm]  
 Flat Plate Crush 1,200 lbs/in [21.43 Kg/mm]



Handheld RF Analyzer Rugged Phase Stable  
 Cable N Male to 7/16 DIN Female Cable 144 Inch  
 Length Using Coax, RoHS

## RF Cable Assemblies Technical Data Sheet

**ET17402**

### Connectors

Description	Connector 1	Connector 2
Type	N Male	7/16 DIN Female
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating		Passivated Stainless Steel
Body Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Coupling Nut Material and Plating	Passivated Stainless Steel	

#### Mechanical Specification Notes:

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8"$ , whichever is greater.

Fieldfox® is a registered trademark of Keysight Technologies

CellAdvisor® is registered trademark Viavi Solutions

SiteHawk® is a registered trademark of Bird Technologies

### Environmental Specifications

#### Temperature

Operating Range

-55 to +105 deg C

#### Notes:


- Values at 25°C, sea level.



ebeestock

# ET17402 CAD Drawing

Handheld RF Analyzer Rugged Phase Stable Cable N Male to 7/16 DIN  
Female Cable 144 Inch Length Using Coax, RoHS

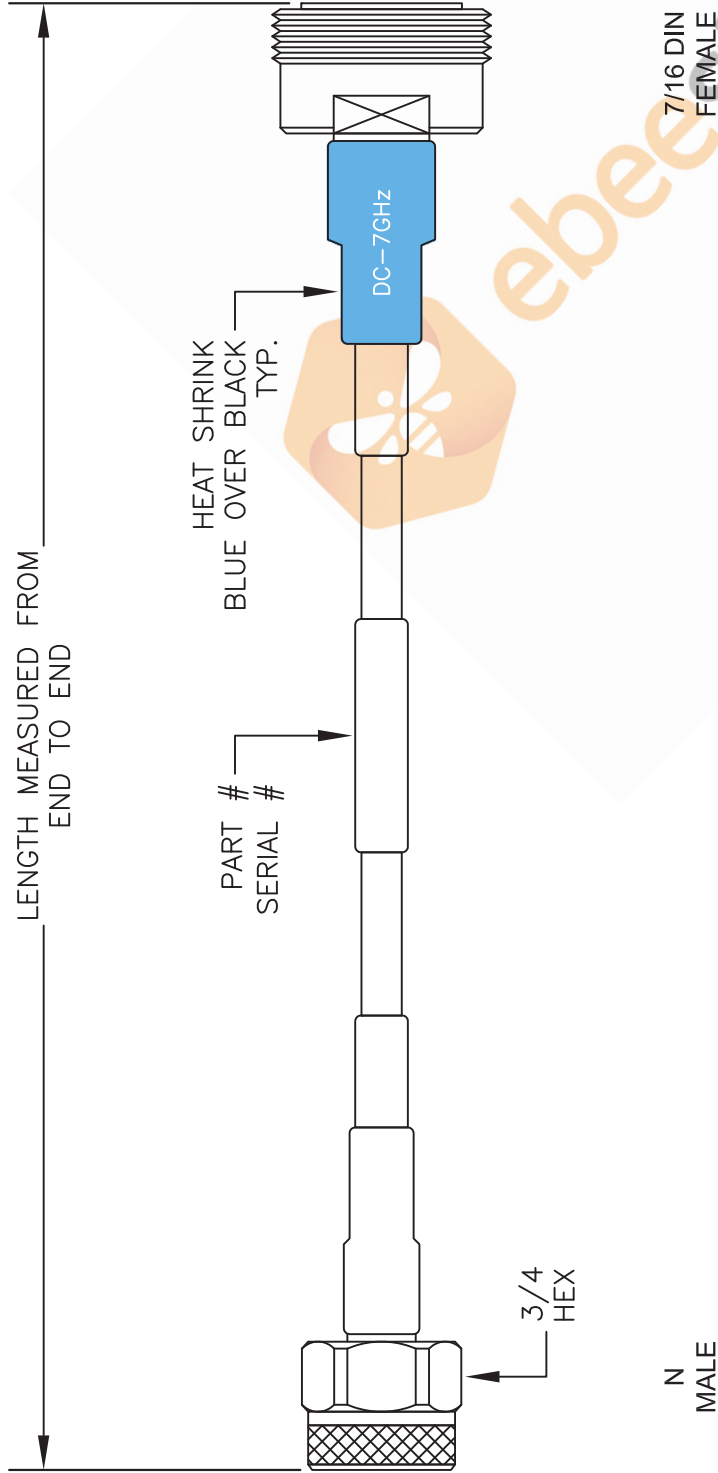

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
  3. DIMENSIONS ARE IN INCHES [mm].
  4. LENGTH TOLERANCE IS  $\pm 2\%$

DWG TITLE  
ET17402

CAGE CODE 53919

CAD FILE 041717

SCALE N/A

SIZE A

2233

8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY  
CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5,  
HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA

WEBSITE: [www.ebeestock.com](http://www.ebeestock.com)  
EMAIL: [sales@ebeestock.com](mailto:sales@ebeestock.com)



**ebeestock**