



Fire Rated 4.3-10 Female to 7/16 DIN Male Low PIM Cable 48 Inch

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/09/19	S.ELLIS

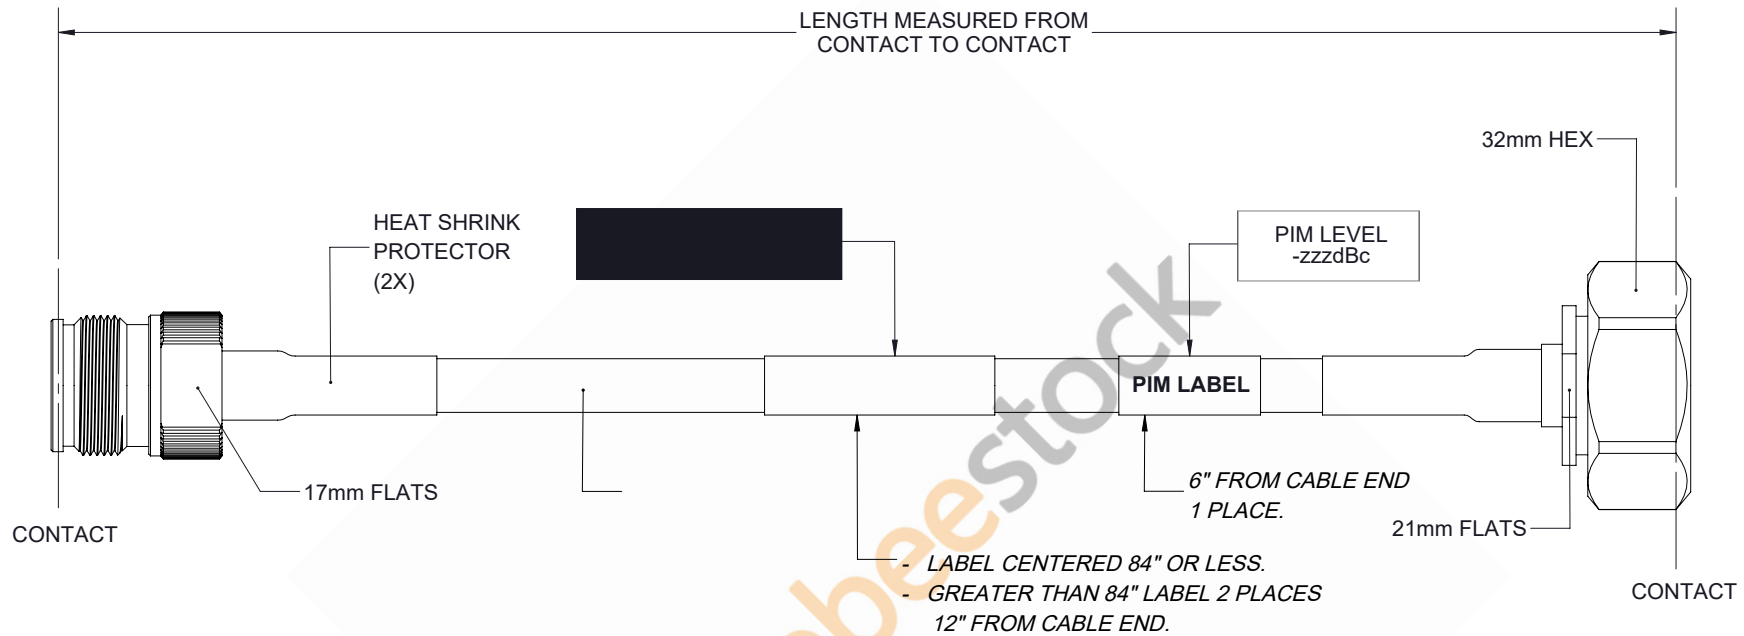

4.3-10
FEMALE

7/16 DIN
MALE

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS		 8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5, HUMEN 523800, DONGGUAN, GUANGDONG, CHINA WEBSITE: www.ebeestock.com EMAIL: sales@ebeestock.com		SHEET 1 OF 1	
TOLERANCES: .X±.2 [5.08] FRACTIONS ± 1/32 .XX±.01 [.25] ANGLES ± 1° .XXX±.005 [.13]				SCALE N/A	
ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.		SIZE	CAGE	DRAWN BY	PART NUMBER
THIRD-ANGLE PROJECTION		A	53919	K.DANG	ET17433
				REV	A