



| COMPONENTS | IMPEDANCE |
|------------|-----------|
| MHV MALE   | 50 OHM    |
| SHV PLUG   | 50 OHM    |
| RG62A/U    | 93 OHM    |
|            |           |

| Standard Lengths |                         |
|------------------|-------------------------|
| -12              | 12"                     |
| -24              | 24"                     |
| -36              | 36"                     |
| -48              | 48"                     |
| -60              | 60"                     |
| -XXX             | Custom Length in inches |
|                  |                         |

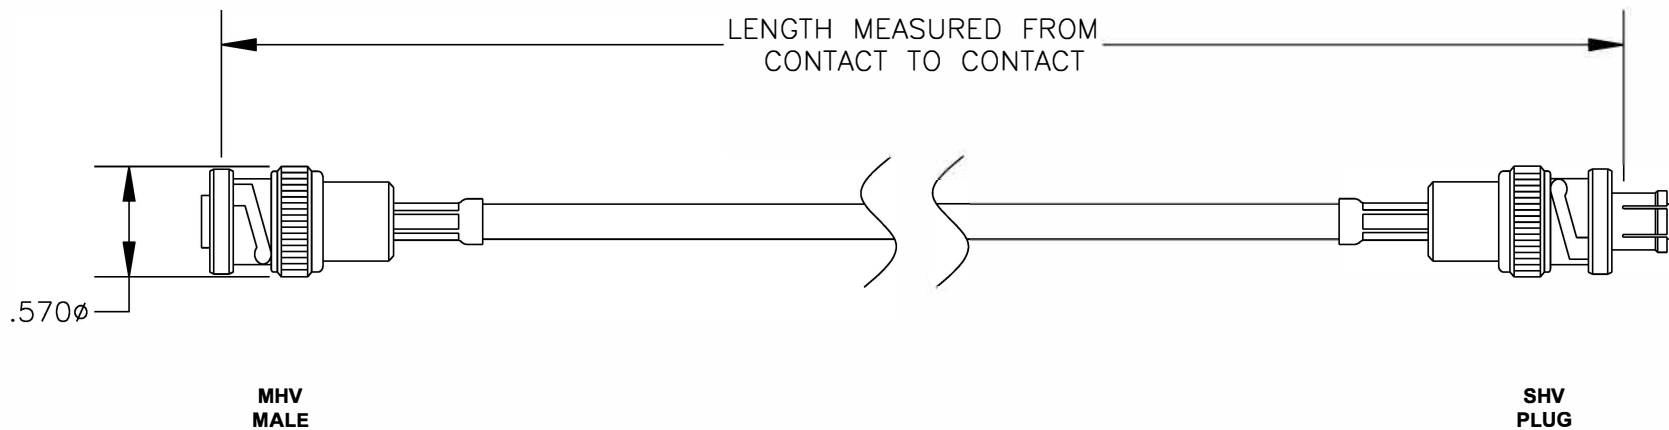

RoHS  
Compliance  
Certified

|   |                |
|---|----------------|
|  8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5, HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA<br>WEBSITE: <a href="http://www.ebeestock.com">www.ebeestock.com</a><br>EMAIL: <a href="mailto:sales@ebeestock.com">sales@ebeestock.com</a><br>COAXIAL & FIBER OPTICS |                |
| <b>ET25185</b>  |                |
| DES. CABLE ASSEMBLY, RG62A/U, MHV MALE TO SHV PLUG (LEAD FREE)  |                |
| REV. A  | FSCM NO. 53919 |
| CAD FILE  | 013008         |
| SCALE   | N/A            |
| SIZE  | A 147          |

**NOTES:**

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES.
4. LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $\pm 3/8"$ , WHICHEVER IS GREATER.