



| COMPONENTS | IMPEDANCE |
|------------|-----------|
| MHV MALE | 50 OHM |
| MHV MALE | 50 OHM |
| RG223/U | 50 OHM |
| | |

| Standard Lengths | |
|------------------|-------------------------|
| -12 | 12" |
| -24 | 24" |
| -36 | 36" |
| -48 | 48" |
| -60 | 60" |
| -XXX | Custom Length in inches |
| | |

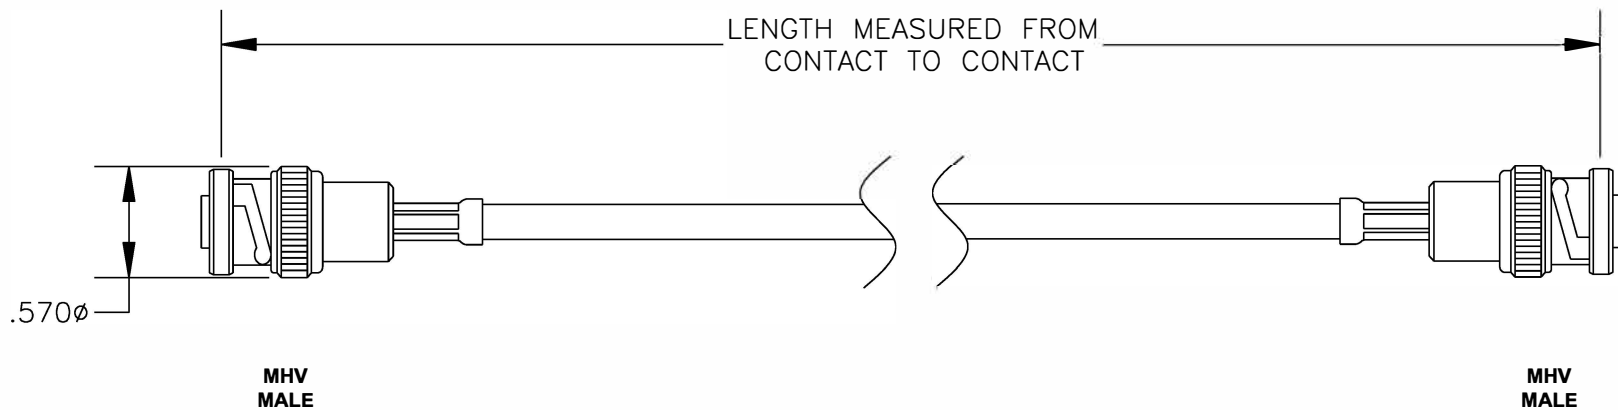

RoHS
Compliance
Certified

| | | | | |
|---|----------------|-----------------|-----------|------------|
|  <p>8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5, HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA</p> <p>WEBSITE: www.ebeestock.com EMAIL: sales@ebeestock.com</p> <p>COAXIAL & FIBER OPTICS</p> | | | | |
| <h1>ET25263</h1> | | | | |
| <p>DES. CABLE ASSEMBLY, RG223/U, MHV MALE TO MHV MALE (LEAD FREE)</p> | | | | |
| REV. A | FSCM NO. 53919 | CAD FILE 013008 | SCALE N/A | SIZE A 147 |

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES.
4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR $\pm 3/8"$, WHICHEVER IS GREATER.