



| COMPONENTS    | IMPEDANCE |
|---------------|-----------|
| MINI SMB PLUG | 75 OHM    |
| MINI SMB PLUG | 75 OHM    |
| RG179B/U      | 75 OHM    |

| Standard Lengths |                         |
|------------------|-------------------------|
| -12              | 12"                     |
| -24              | 24"                     |
| -36              | 36"                     |
| -48              | 48"                     |
| -60              | 60"                     |
| -xxx             | Custom Length in inches |

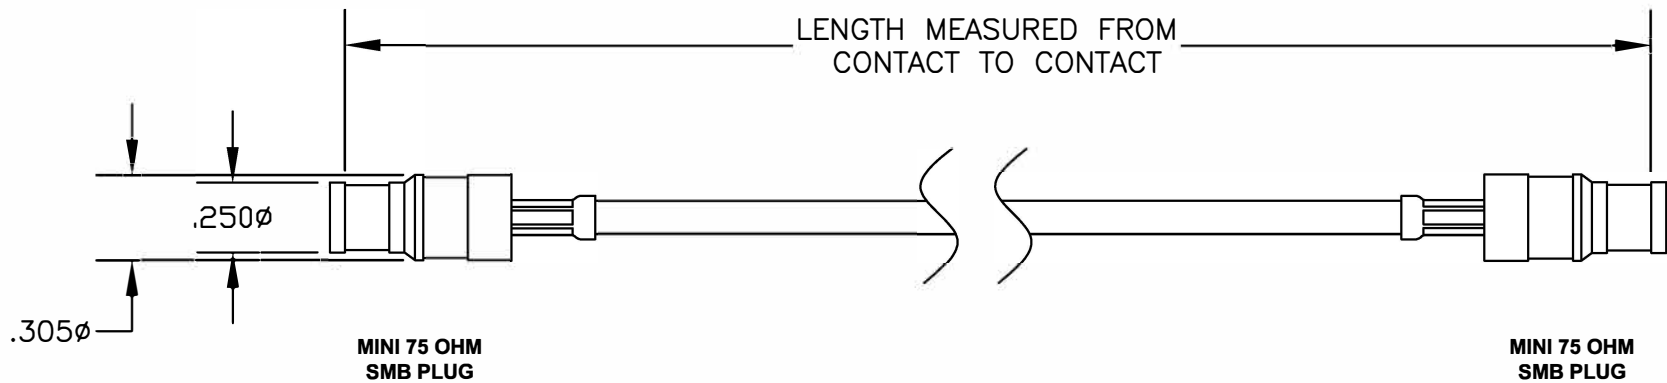

RoHS  
Compliance  
Certified

|   |                |
|---|----------------|
|  <b>8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5, HUIHUI, 523900, DONGGUAN, GUANGDONG, CHINA</b> |                |
| <b>ebeestock</b><br>WEBSITE: <a href="http://www.ebeestock.com">www.ebeestock.com</a><br>EMAIL: <a href="mailto:sales@ebeestock.com">sales@ebeestock.com</a>  |                |
| <b>COAXIAL &amp; FIBER OPTICS</b>   |                |
| <h1>ET25321</h1>  |                |
| DES. CABLE ASSEMBLY, RG179B/U, MINI 75 OHM SMB PLUG TO MINI 75 OHM SMB PLUG (LEAD FREE SOLDER)  |                |
| SIZE A  | FSCM NO. 53919 |
| CAD FILE 013007   | SCALE N/A      |
| 127   |                |

**NOTES:**

- UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
- DIMENSIONS ARE IN INCHES.
- LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $\pm 3/8"$ , WHICHEVER IS GREATER